

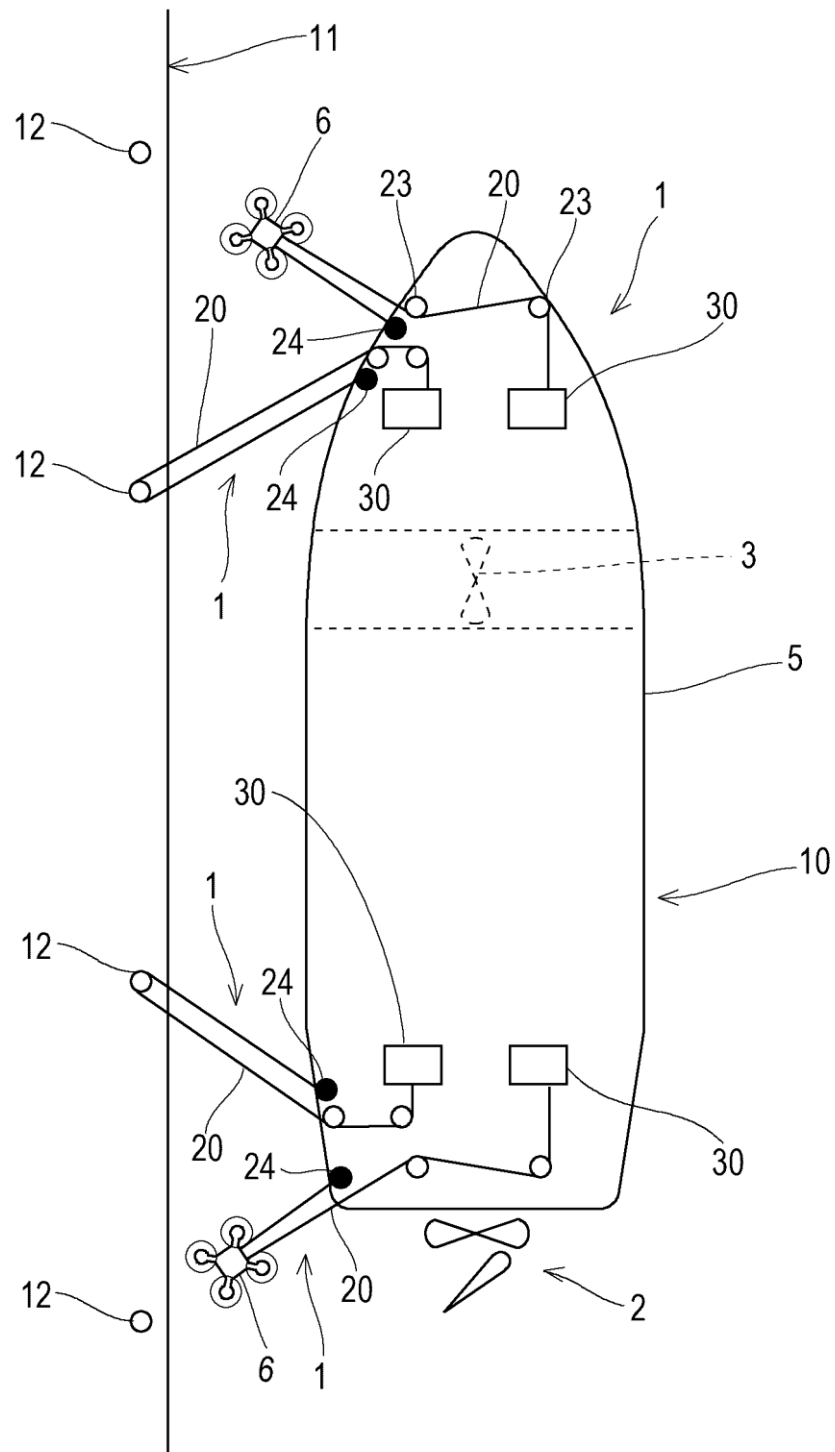


FIG.1

FIG.2

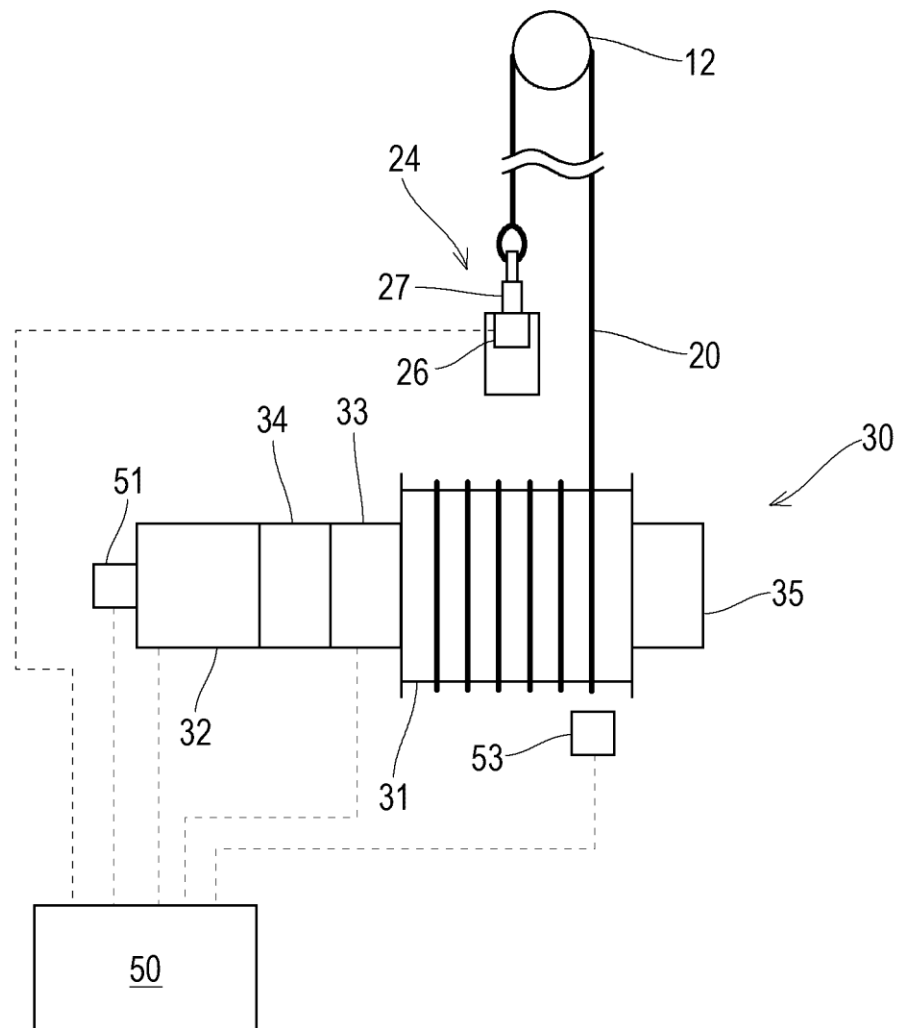


FIG.3

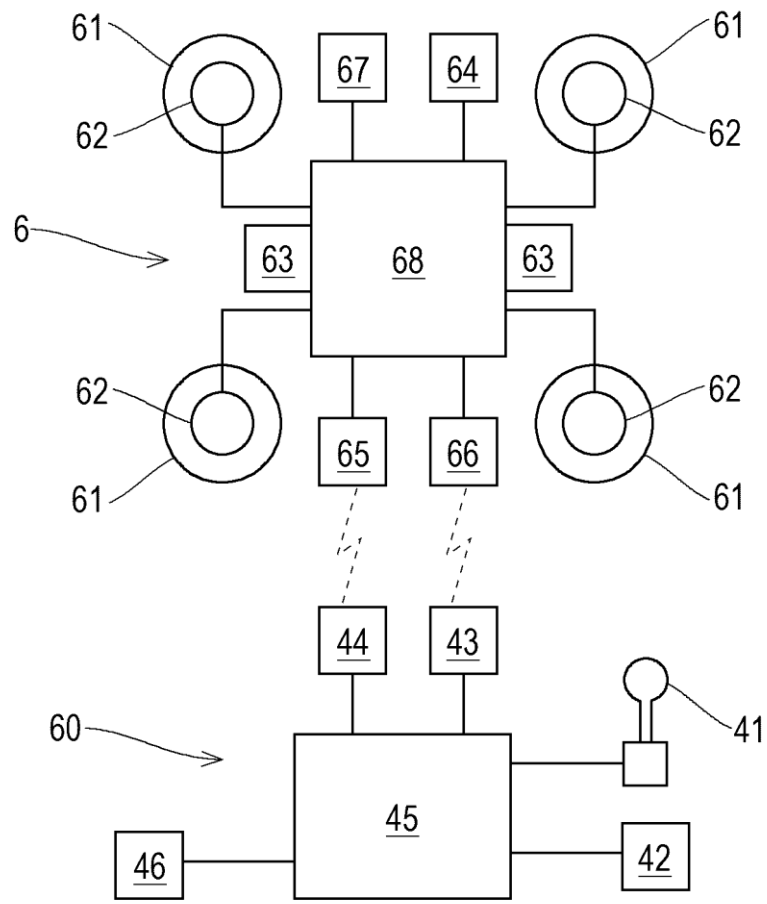


FIG.4

FIG.5A

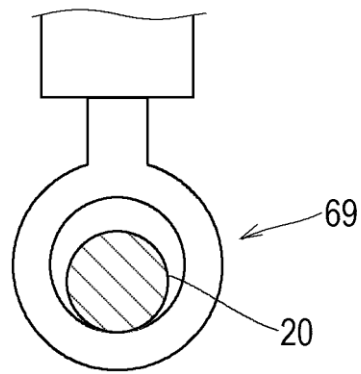


FIG.5B

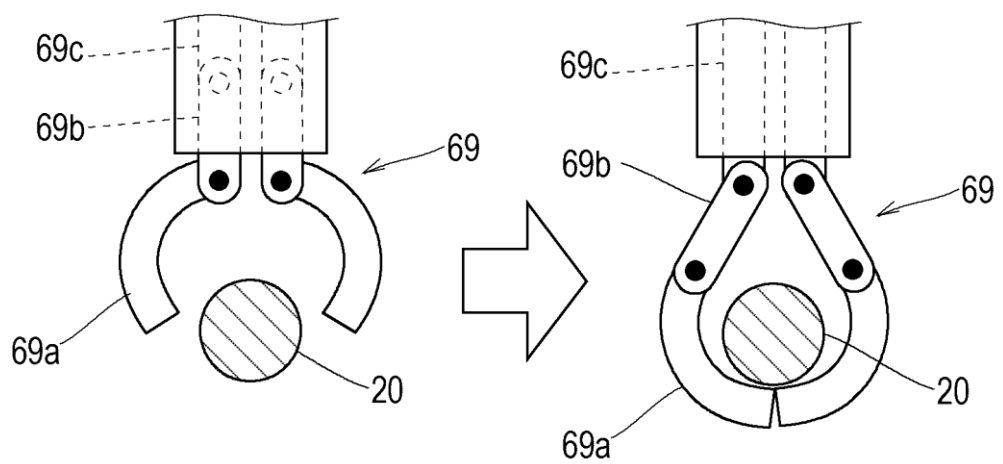
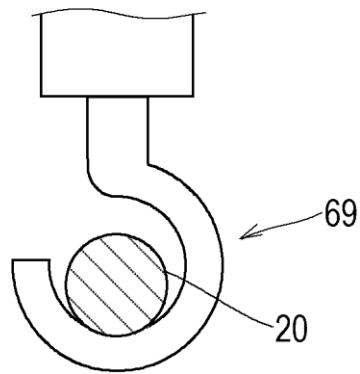


FIG.5C

The diagram illustrates a cable system 1. A cable 20 is supported by a vertical support 11. The cable has two ends, 6A and 6B, each with four rollers. A circular component 12 is positioned between the rollers. The cable is connected to a device 24 via a connector 27. The device 24 includes a component 26 and a component 31. A power supply unit 60B is connected to the device 24 via a cable 60A. The diagram is divided into two sections by a vertical line 10.

FIG.7

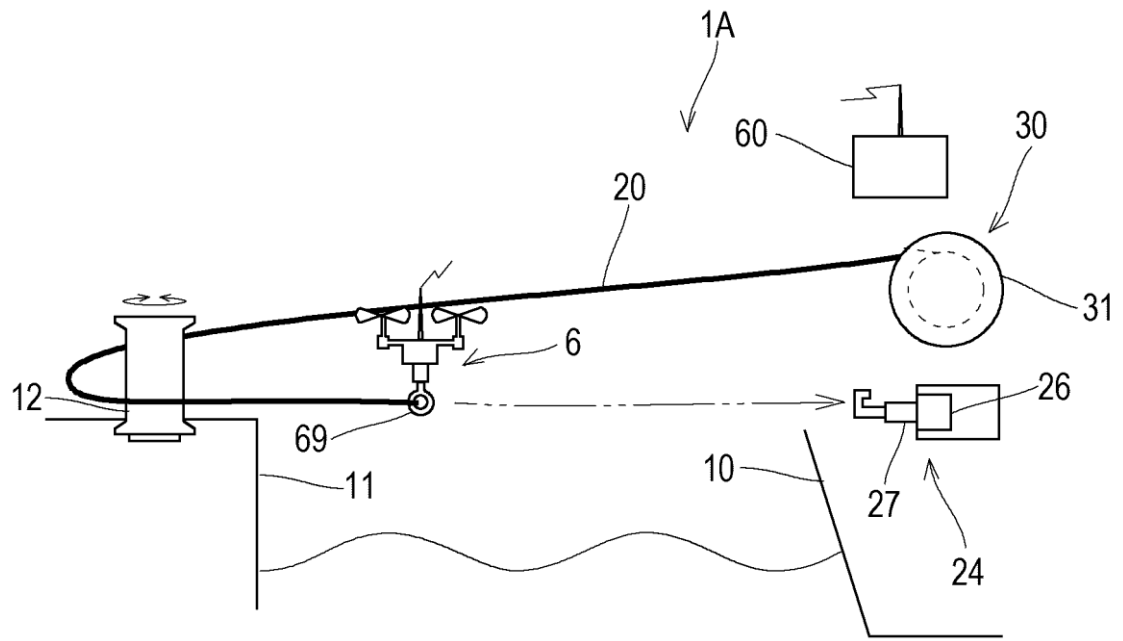


FIG.8

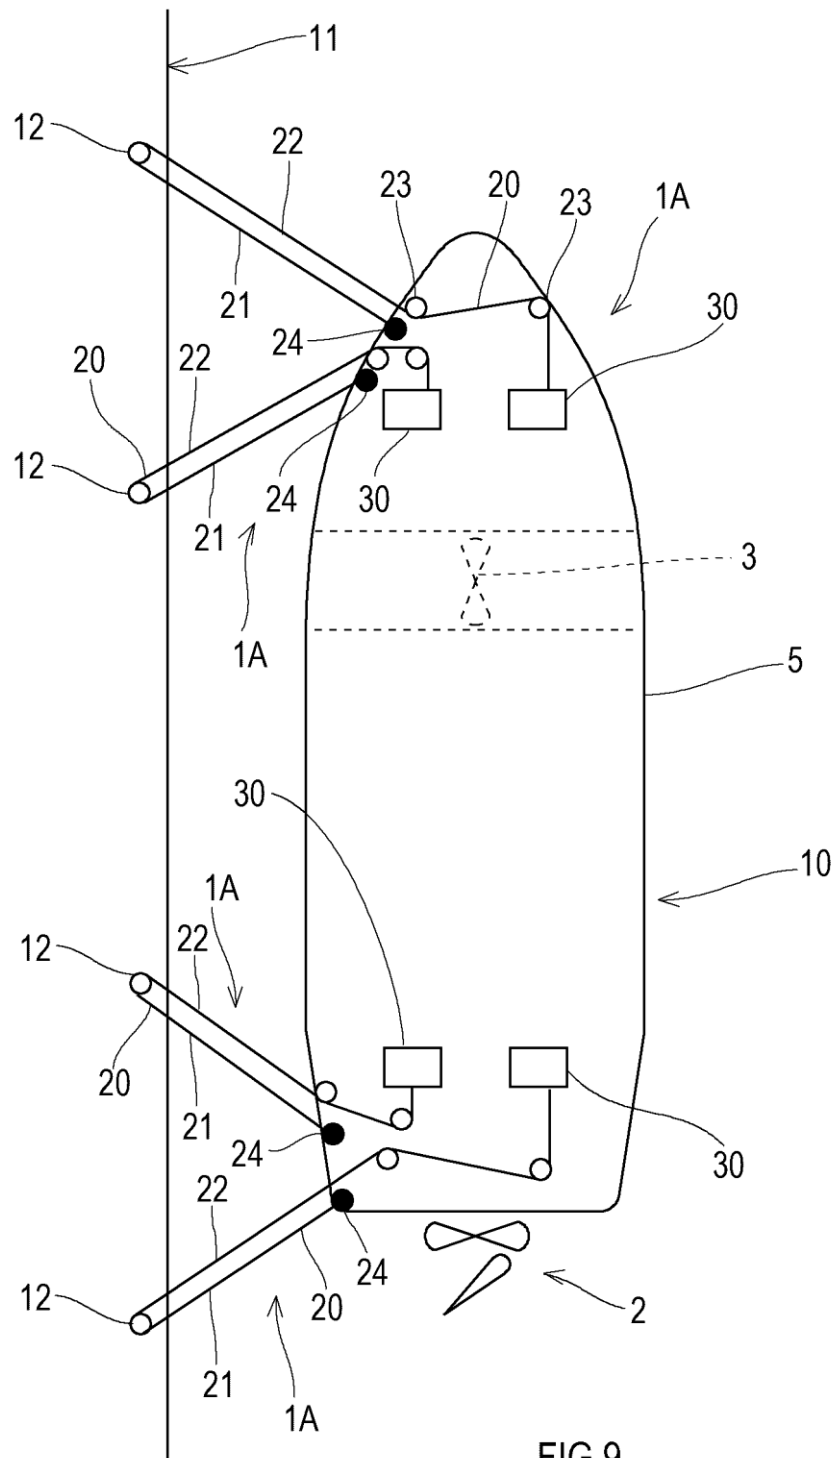


FIG. 9

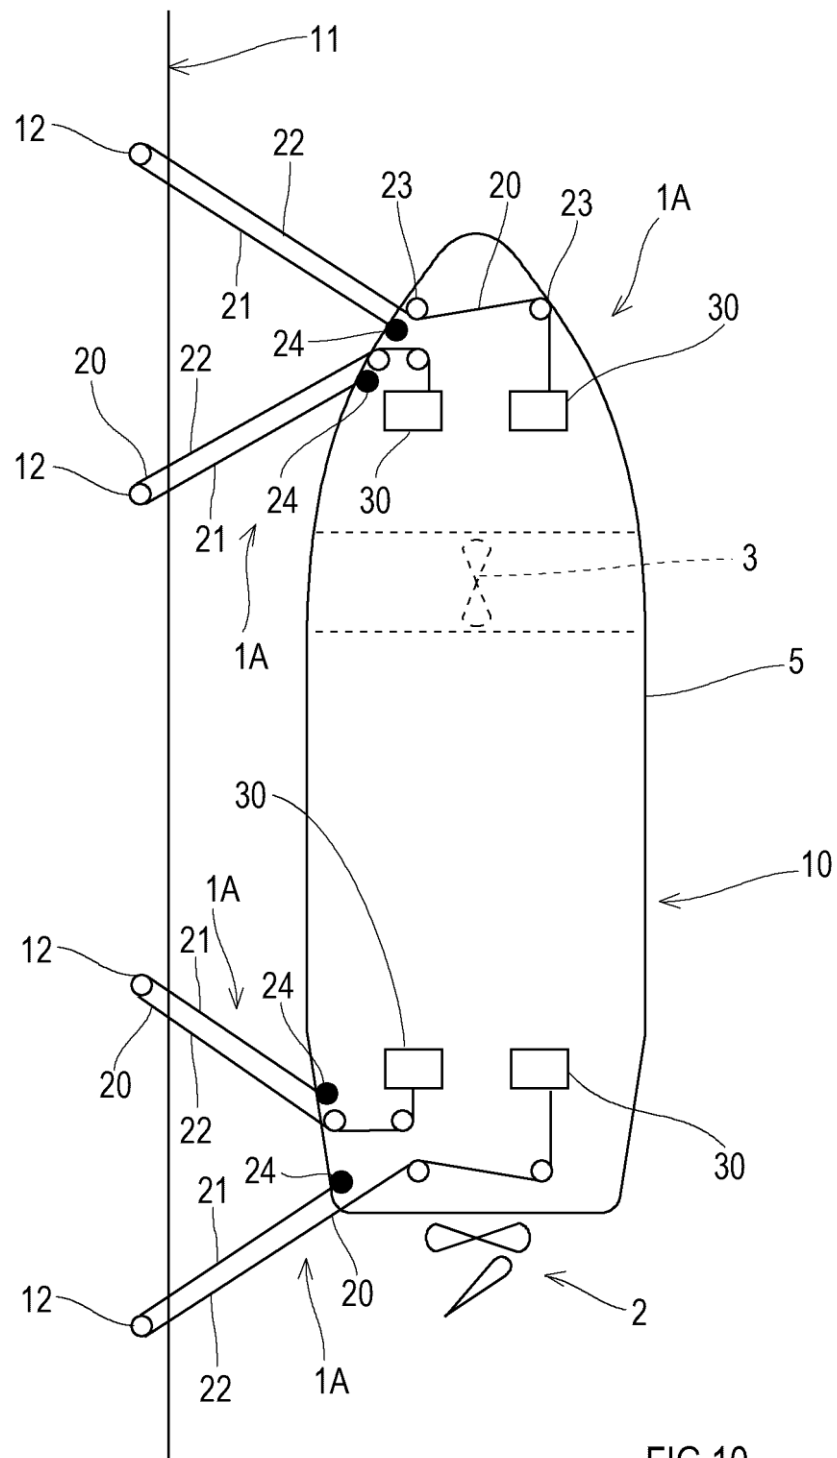


FIG. 10

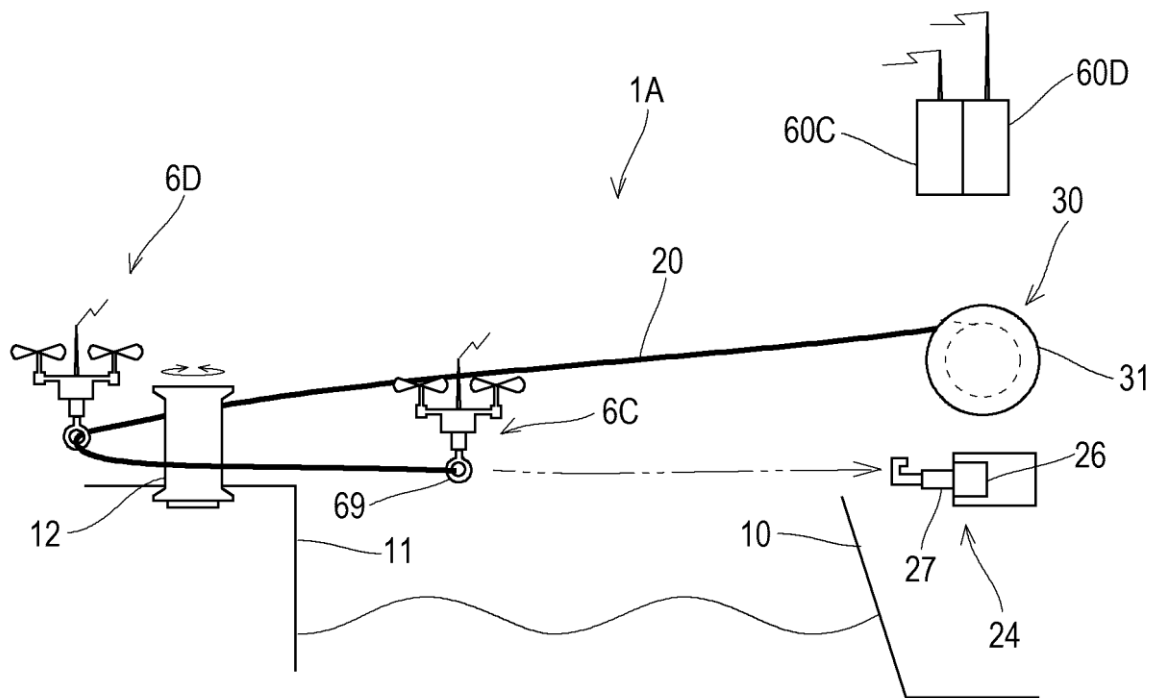


FIG.11

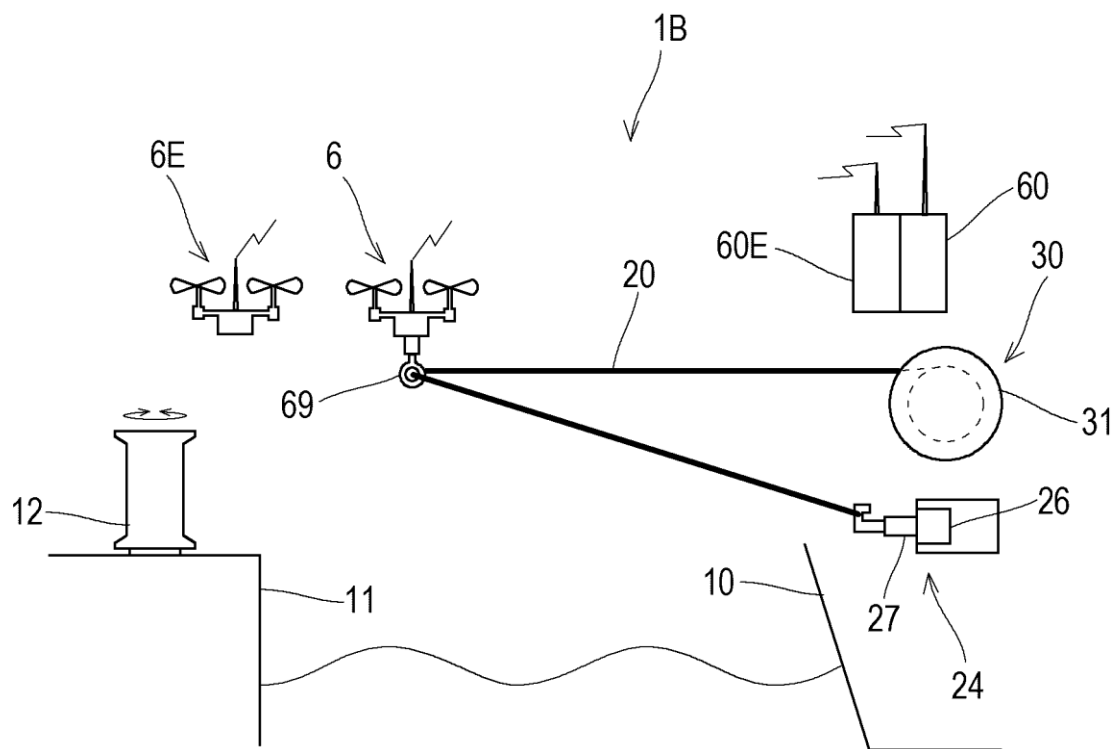


FIG.12