



(51) International Patent Classification:

F24F 1/24 (2011.01) F24F 13/072 (2006.01)
F24F 11/02 (2006.01) F24F 13/12 (2006.01)

(21) International Application Number:

PCT/SE2010/000207

(22) International Filing Date:

20 August 2010 (20.08.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0901265-9 2 October 2009 (02.10.2009) SE

(71) Applicant (for all designated States except US): **FLÄKT WOODS AB** [SE/SE]; Fläktgatan 1, S-551 84 Jönköping (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KJELLERSTEDT, Jonas** [SE/SE]; Stenbäckspan 3, S-56232 Norrahammar (SE). **JOHANSSON, Hardy** [SE/SE]; Lybäcksvägen 61, S-56631 Habo (SE). **HOLGERSSON, Robert** [SE/SE]; Trädgårdsgatan 43, S-55317 Jönköping (SE).

(74) Agent: **GOTAPATENT AB**; Box 3127, S-55003 Jönköping (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report (Art. 21(3))

(54) Title: COOLING BEAM WITH VAV-FUNCTION VIA A REGULATING STRIP

Fig. 2

VIEW I-I

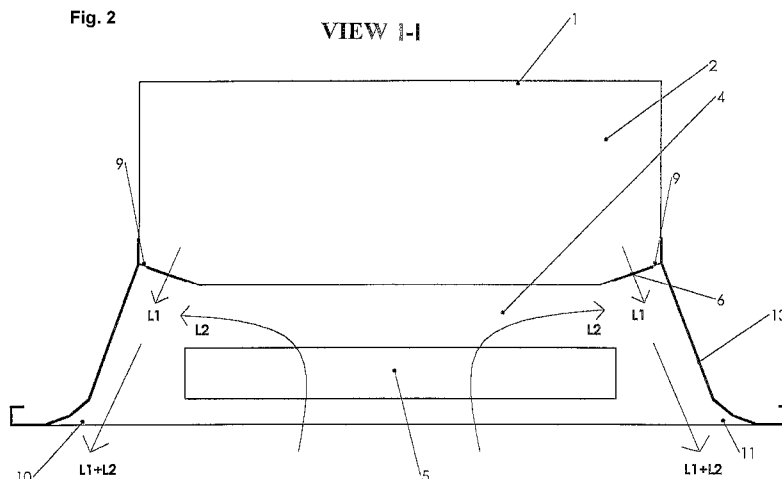

(57) Abstract: A device for an air handling system, where the cooling beam has a pressure chamber (2), from which the volume flow in the supply air L1 out to the room is regulated with a regulating strip (6) that is mounted on the surfaces (9) in the pressure chamber and where the air flow L1 in the mixing chamber (4) gives an optimal flow pattern of the recirculating air flow L2 from the room and where those air flows together acquire well defined flow profiles independent from the volume flow L1.