

Description


The present invention relates to novel compounds suitable for use as anti-wear/anti-corrosion additives in lubricating oil compositions, to a method for their preparation and to lubricating oil compositions containing the aforesaid additives.

The severe demands placed upon lubricating oils by modern internal combustion engines necessitate incorporation into the lubricating oil of additives of various types, for example viscosity index improvers, dispersants, detergents, anti-oxidants, anti-wear (A.W.) agents, extreme pressure (E.P.) agents, and the like. Generally, each additive agent is employed to impart a particular characteristic to the base oil so as to afford a finished lubricating oil composition which is oxidation resistant, stable and non-corrosive to bearing metals, and which effectively reduces varnish and sludge forming tendencies and minimises frictional and corrosive wear.


The use of zinc dialkyl dithiophosphates (ZDTPs) as additives in lubricating oils for the purpose of improving the wear and corrosion characteristics of the oil has long been known from, for example GB Patents Nos. 957,017; 1,358,478 and 1,565,961.

Despite the fact that ZDTPs have been very effective and very successful in a number of engine lubricating oils, it is presently considered desirable to reduce the phosphorus content of the finished lubricating oil by the provision of alternative additives for the purpose of reducing environmental pollution.

One class of compound proposed for this purpose are the hydrocarbon polysulphide derivatives of 2,5-dimercapto-1,3,4-thiadiazole having the general formula:-

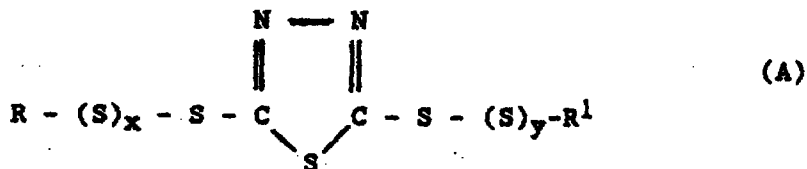


wherein R and R¹ are the same or different hydrocarbon radicals, x and y are numbers 0 to about 8, the sum of x and y is at least one, and preferably 2 to about 16. Such compounds are described in US Patents Nos. 2,719,125; 2,719,126 and 3,663,561. One of these compounds of formula:

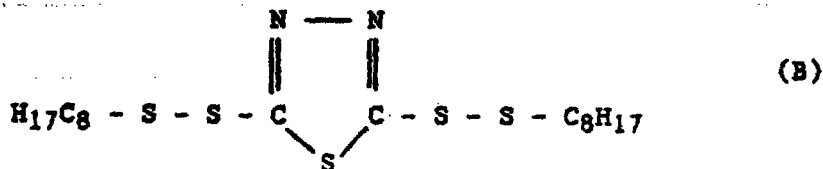

has achieved some commercial importance.

From DT-A-2814458 are also known lubricant compositions containing a 1,2,4-triazole derivative of the formula:-

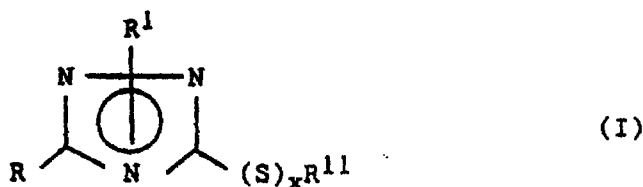

wherein


x = 1 - 25,

R, R¹ and R¹¹ are H, optionally substituted 1-20C alkyl, 2-12C alkenyl or alkynyl, optionally substituted 3-12C cycloalkyl, optionally substituted 6-10C aryl, optionally substituted 8-12C aralkenyl or aralkynyl, optionally substituted 7-20C aralkyl, optionally substituted 3-10 membered heterocyclyl, 2-12C alkylene, 5-12C cycloalkylene or 6-10C arylene, or R can be -(S)_xR¹¹, or R¹¹ can be a heterocyclylthio group or an optionally substituted ammonium cation; when R¹¹ = H, R or R¹ can also be an organic group linking 2

triazole residues of formula (I) with R¹ in the 4-position.

We have now found a class of novel compounds useful for the aforesaid purpose.

Accordingly, the present invention provides compounds suitable for use as EP/AW agents in lubricating oil compositions which compounds have the formula:-




wherein

R¹ is either R-S- or hydrogen,


R is independently either hydrocarbyl or substituted hydrocarbyl, and

X comprises a heterocyclic ring having six atoms of which two are nitrogen atoms.


Preferred compounds of formula (I) are those in which R¹ is the group R-S-, i.e. compounds of the formula:-




A preferred class of compounds conforming with the formula (I) are pyridazines having the formula:-



25 Another preferred class of compounds conforming with the formula (I) are pyrimidines having the formula:

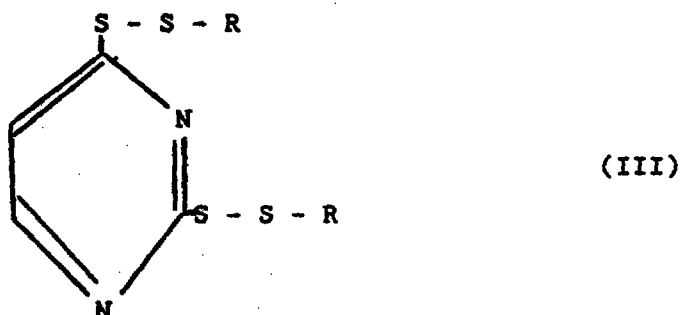


35 Yet another preferred class of compounds conforming with the formula (I) are pyrazines having the formula:-

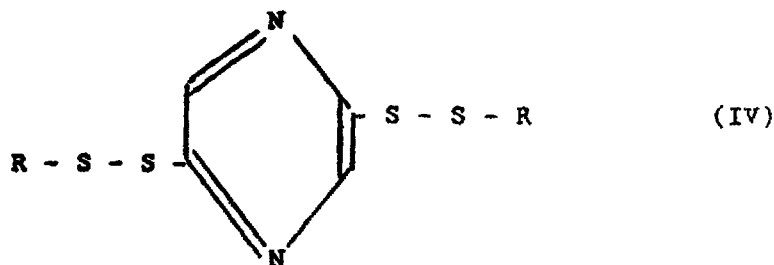

45 Alternatively, the group X may be a fused ring heterocyclic group, for example a phthalazine or quinoxaline, typically a compound of the formula:

55

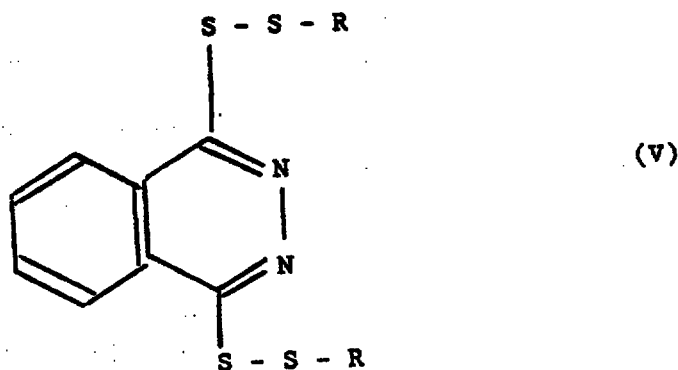


Furthermore, the ring(s) may be substituted.

The groups R in the formula (I) to (IV) are independently either hydrocarbyl or substituted hydrocarbyl groups. Suitable hydrocarbyl groups include alkyl and alkaryl groups and particularly alkyl groups containing sufficient carbon atoms to impart oil solubility, for example at least 4 carbon atoms, typically n-octyl or n-dodecyl groups. Suitable substituents in the substituted hydrocarbyl groups include hydroxy, alkoxy, acid, amido, amino and ester groups.

The present invention also provides a process for the production of compounds having the formula (I) which process comprises the steps of:

(A) reacting a thiol of the formula RSH (VI) wherein R is the same as in the formula (I) with thiourea and hydrogen peroxide in aqueous alcoholic media in the presence of a salt-forming acid to produce a salt of the formula:



(B) reacting the salt of formula (VII) with a compound of the formula:



wherein X is the same as in the formula (I) in aqueous alcoholic media under basic conditions to produce the compound of formula (I), and

(C) recovering the compound of formula (I) produced in step (B).

In step (A) of the process there is employed an alcohol. Suitable alcohols include aliphatic and aromatic alcohols, alcohol ethers, polyols, and the like. Preferably the alcohol is a C₁ to C₄ alkanol, for example methanol or ethanol. The acid may suitably be any acid which forms an acid salt, and may be either a mineral or organic acid, preferably a mineral acid. Suitable acids are those of the formula HX wherein X is halide, for example chloride. Step (A) may suitably be carried out at sub-ambient, ambient or elevated temperature, preferably at a temperature in the range 0 to 25°C.

In step (B) of the process there is employed an alcohol, which may be the same or different to the alcohol employed in step (A). The reaction is carried out under basic conditions, which may be accomplished by addition of an organic or inorganic base, preferably an inorganic base, for example sodium bicarbonate. The reaction may suitably be carried out at sub-ambient or elevated temperature, preferably in the range from 0°C to the reflux temperature of the alcohol. In order to form the compound of formula (I) wherein R¹ is R-S- it will be generally necessary to use about 2 moles of the salt of formula VII, whereas to form the compound of formula (I) wherein R¹ = H only one mole will generally be required.

In step (C) the compound of formula (I) is recovered. This may be accomplished in conventional manner.

The present invention also provides a finished lubricating oil composition comprising a lubricating oil base stock and an EP/AW-improving amount of a compound of the formula (I).

The lubricating oil base stock may be any oil of lubricating viscosity, which may be a mineral oil or a synthetic lubricating oil. Suitable mineral oils include both solvent extracted or solvent refined oils obtained

in accordance with conventional methods of treating lubricating oils. The base oil may be derived from paraffinic, naphthenic, asphaltic or mixed base crudes. Alternatively, the base oil may be a synthetic oil, or a mixture thereof with mineral oil.

5 The lubricating oil composition may suitably contain from 0.01 to 10, preferably from 0.1 to 1% w/w of the compound of formula (I), the remainder of the composition being comprised of the lubricating oil base stock.

In addition, the lubricating oil composition may contain conventional additives, for example dispersants, detergents, VI improvers, anti-oxidants, pour-point depressants, or the like.

10 Lubricating oil additives are generally manufactured and marketed in the form of a concentrate for subsequent blending into finished lubricating oils.

In another embodiment of the invention there is provided a lubricating oil additive concentrate for use in the production of finished lubricating oils which comprises a lubricating oil base stock and sufficient of a compound of formula (I) to give a concentration of from 0.01 to 10, preferably from 0.1 to 1%, w/w in the finished lubricating oil composition.

15 Suitably the concentration of the compound of formula (I) in the concentrate composition may be from 2 to 20, typically about 10, times its concentration in the finished lubricating oil composition.

The lubricating oil base stock may be any of the aforescribed lubricating oils, but is preferably a solvent neutral oil. As an alternative to incorporating conventional additives directly in the finished lubricating oil, some or all of the additives may be incorporated into the concentrate composition.

20 The invention will now be further illustrated by referenced to the following examples.

PREPARATION OF COMPOUNDS OF THE FORMULA (I)

Preparation of pyrimidine-2,4-dithiol [formula (VII)] for use in step (B) of the process

25 A suspension of 2-thiouracil (32.0 g, 0.25 mole) in pyridine (150 ml) was stirred at room temperature and treated portionwise with phosphorus pentasulphide (21.25g) over 40 minutes. The reaction mixture was then refluxed for 45 minutes giving a homogeneous solution which was then cooled and treated with iced water (250 ml) and the resultant mixture stirred at 80 - 90 °C for 2 hours during which time hydrogen sulphide was evolved and a solid formed. The mixture was cooled and acidified with conc. hydrochloric acid and filtered. The solid was washed thoroughly with water and dried giving the dithiol as a yellow powder (28.6 g; 79%). The product was analysed for sulphur content with the following results:

Analysis

35 Sulphur: Found 44.0%
Calculated 44.47%

Preparation of Phthalazine - 1,4-dithiol [Formula (VII)] for Use in Step (B) of the Process

40 A stirred suspension of phthalhydrazide (40.5 g, 0.25 mole) in pyridine (150 ml) was treated portionwise over 1 hour with phosphorus pentasulphide (42.5 g) at room temperature (15 °C). The temperature of the mixture was observed to rise to 40 °C during the addition. The mixture was then refluxed and stirred for 20 hours. It was then cooled to 15 °C, treated with iced-water (250 ml) and stirred at 80-90 °C for 2 hours. The mixture was cooled, acidified (concentrated hydrochloric acid) and filtered. The solid was washed thoroughly with water and dried giving the product as a yellow solid (45.2 g 93%).

Example 1

50 Step (A) - Preparation of S-n-octylthioisothioureia hydrochloride [formula (VI)] for use in Step (B) of the Process

Hydrogen peroxide (30% aqueous, 28.0 g) was added dropwise over 45 minutes to a stirred mixture of n-octanethiol (32.27 g, 0.221 mole), thiourea (20.1 g, 0.264 mole), concentrated hydrochloric acid (35 ml), water (35 ml) and ethanol (500 ml) maintained at 0-10 °C. After the addition was complete the reaction mixture was stirred at room temperature for 2 hours during which time a thick white precipitate formed. The mixture was filtered and the filtrate evaporated giving a solid residue. This was dissolved in ethanol (150 ml), diluted with diethyl ether (800 ml) and allowed to stand overnight at 0 °C. Filtration gave white crystals

of the product (46.3 g; 82%), melting point = 77-82 °C.

Steps (B) and (C) - Preparation and recovery of 2,4-bis(n-octyldithio) pyrimidine [formula (III)]

A solution of sodium bicarbonate (4.30 g; 0.05 mole) in water (60 ml) was added dropwise to a stirred suspension of pyrimidine -2,4-dithiol prepared as above (2.16 g, 0.015 mole) and S-n-octylthioisothiourea hydrochloride obtained in step (A) (7.695 g, 0.03 mole) in methanol (70 ml) at 60-65 °C over 30 minutes. The mixture was stirred at room temperature for a further hour and then extracted into naphtha (3 x 50 ml). The organic extracts were washed with water, dried using anhydrous $MgSO_4$ and evaporated yielding the product as an orange oil (5.54 g; 85%).

Examples 2 and 3

The following compounds of the formula (I) were prepared by the procedure described in Example 1 except that a pyridazine dithiol prepared in a similar manner to the pyrimidine dithiol was used in place of the pyrimidine dithiol:-

Example 2 - with reference to formula (II), R = n-octyl.

Example 3 - with reference to formula (II), R = n-dodecyl.

Example 4

Step (A) - Preparation of S-n-octylthioisothiourea Hydrochloride [formula (VI) for Use in Step (B) of the Process

The procedure of Example 1 was repeated.

Steps (B) and (C) - Preparation and Recovery of 1,4-bis (n-octyldithio)phthalazine [formula (V)]

A solution of sodium bicarbonate (4.30 g, 0.05 mole) in water (60 ml) was added dropwise to a stirred suspension of the phthalazine-1,4-diol prepared as above (2.91 g, 0.015 mole) and S-n-octylthioisothiourea obtained in step (A) (7.695 g, 0.03 mole) in methanol (70 ml) at 60-65 °C over 30 minutes. The mixture was stirred at room temperature for a further hour, then filtered giving a yellow solid, which was washed with water and dried giving the product as yellow crystals (6.56 g, 91%).

Comparison Tests A and B

2,5-dithioalkyl,1,3,4-thiadiazoles of the formula (A) in which R = R' = n-octyl and x = y = 1 (Comparison Test A) and in which R = R' = n-dodecyl (Comparison Test B) and x = y = 1 were prepared by the method of Example 1, Steps B and C starting from 2,5-dimercapto-1,3,4-thiadiazole and the appropriate S-n-alkylthioisothiourea hydrochloride.

These are not examples of compounds according to the present invention and were prepared for comparison purposes only.

The identities of the substituents (with reference to the formula (I)) and the melting points (where applicable) of the products of Examples 1 - 4 and Comparison Tests A and B are given in Table 1.

Table 1

Example	X (Heterocycle)	R	M Pt (°C)
1	pyrimidine	n-octyl	oil
2	pyridazine	n-octyl	58-61
3	pyridazine	n-dodecyl	81-84
4	phthalazine	n-octyl	61-64
Comp Test A	1,3,4-thiadiazole	n-octyl	oil
Comp Test B	1,3,4-thiadiazole	n-dodecyl	31-34

PRODUCT TESTINGExample 5

A blend of the product of Example 2 was made up in SN 150 base oil at a concentration of 0.1% and the anti-wear properties of the blend were tested using the Shell four-ball test. This test involved passing a rotating steel ball against a triangle of three stationary balls lubricated with the blend under test. The Initial Seizure Load (ISL), the scar diameter (40 kg/one hour) and the Weld Load (WL) were determined.

The copper strip rating of the blend was also determined at 150°C after 3 hours in conventional manner.

Example 5

The procedure of Example 4 was repeated except that the 1,4-bis(n-octyldithio)phthalazine of Example 4 was used instead of the pyridazine of Example 2.

The results are given in Table 2.

Comparison Test C

The procedure of Example 5 was used except that no additive was employed.

Comparison Test D

The procedure of Example 5 was employed except that instead of the compound of formula (I) there was used the 1,3,4-thiadiazole of Comparison Test A.

Comparison Test E

The procedure of Example 5 was used except that instead of the compound of formula (I) there was used a commercially available thiadiazole ashless EP/AW agent.

Comparison Tests F and G

The procedure of Example 5 was used except that instead of the compound of formula (I) there was used different commercially available zinc dialkyl dithiophosphates (1) and (2).

Comparison Tests C to G are not examples according to the present invention because no compound of the formula (I) was employed. They are included only for the purpose of comparison.

The results of the four-ball tests and the copper strip rating determinations are given in Table 2.

Comparison Test C

The procedure of Example 5 was used except that no additive was employed.

Table 2

Example	Product	Concn (%)	Four-ball test			Copper strip rating 150°C/3 hours
			ISL		WL	
			kg	scar (mm)	kg	
Comp Test C	SN 150	-	40	1.30	120 cat	3A
Comp Test D	Comp Test A (thiadiazole)	0.1	60	1.57	170	2D
Comp Test E	commercial thiadiazole	0.1	70	1.70	160	3A
5	Example 2	0.1	60	1.68	160 cat	3A
6	Example 4	0.1	50	1.55	160	2C
Comp Test F	ZDTP (1)	0.1	40	1.50	130 cat	3A (1%)
Comp Test G	ZDTP (2)	0.1	55	1.90	150 cat	3A (1%)

With reference to the Table:-

cat - indicates catastrophic wear at this load


Copper strip ratings

- 1A - 1B - Slight tarnish
- 2A - 2E - Moderate tarnish
- 3A - 3B - Dark tarnish
- 4A - 4C - Corrosion

The results shown in Table 2 demonstrate that compounds according to the invention are superior to the commercial ZDTPs tested and are comparable with their thiadiazole analogues in terms of EP/AW and corrosion properties at the concentrations used.

Claims

1. Compounds suitable for use as extreme pressure (EP)/anti-wear (AW) agents in lubricating oil compositions, which compounds have the formula:-



wherein

R¹ is either R-S- or hydrogen,

R is independently either hydrocarbyl or substituted hydrocarbyl, and

Comparison Test C

The procedure of Example 5 was used except that no additive was employed.

Table 2

Example	Product	Concn (%)	Four-ball test			Copper strip rating 150°C/3 hours
			ISL		WL	
			kg	scar (mm)	kg	
Comp Test C	SN 150	-	40	1.30	120 cat	3A
Comp Test D	Comp Test A (thiadiazole)	0.1	60	1.57	170	2D
Comp Test E	commerical thiadiazole	0.1	70	1.70	160	3A
5	Example 2	0.1	60	1.68	160 cat	3A
6	Example 4	0.1	50	1.55	160	2C
Comp Test F	ZDTP (1)	0.1	40	1.50	130 cat	3A (1%)
Comp Test G	ZDTP (2)	0.1	55	1.90	150 cat	3A (1%)

With reference to the Table:-

cat - indicates catastrophic wear at this load


Copper strip ratings

- 1A - 1B - Slight tarnish
- 2A - 2E - Moderate tarnish
- 3A - 3B - Dark tarnish
- 4A - 4C - Corrosion

The results shown in Table 2 demonstrate that compounds according to the invention are superior to the commercial ZDTPs tested and are comparable with their thiadiazole analogues in terms of EP, AW and corrosion properties at the concentrations used.

Claims

1. Compounds suitable for use as extreme pressure (EP)/anti-wear (AW) agents in lubricating oil compositions, which compounds have the formula:-



wherein


R¹ is either R-S- or hydrogen;

R is independently either hydrocarbyl or substituted hydrocarbyl, and




X comprises a heterocyclic ring having six atoms of which two are nitrogen atoms.


2. Compounds according to claim 1 having the formula:




3. Compounds according to either claim 1 or claim 2 which are pyridazines having the formula:-



4. Compounds according to either claim 1 or claim 2 which are pyrimidines having the formula:

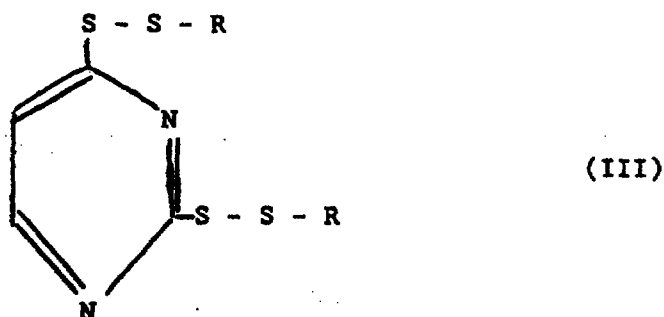

5. Compounds according to either claim 1 or claim 2 which are pyrazines having the formula:-

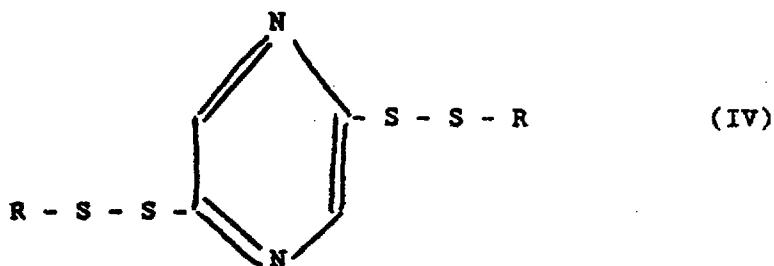


6. Compounds according to either claim 1 or claim 2 wherein the group X is a fused ring heterocyclic group.

7. Compounds according to claim 6 wherein the compound is either a phthalazine or a quinoxaline.



8. Compounds according to claim 6 of the formula:

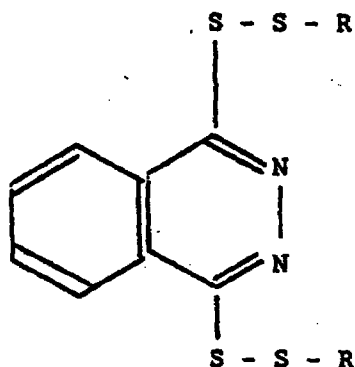

9. Compounds according to any one of the preceding claims wherein the groups R are alkyl groups containing sufficient carbon atoms to impart oil-solubility.

10. Compounds according to claim 9 wherein the groups R are alkyl groups containing at least 4 carbon atoms.

11. A process for the production of compounds of formula (I) as claimed in claims 1 to 10 which process comprises the steps of:

(A) reacting a thiol of the formula RSH (VI) wherein R is the same as in the formula (I) with thiourea and hydrogen peroxide in aqueous alcoholic media in the presence of a salt-forming acid to produce a salt of the formula:



(B) reacting the salt of formula (VII) with a compound of the formula:



wherein X is the same as in the formula (I) in aqueous alcoholic media under basic conditions to produce the compound of formula (I), and


(C) recovering the compound of formula (I) produced in step (B).

12. A finished lubricating oil composition comprising a lubricating oil base stock and an EP/AW-improving amount of a compound as claimed in claims 1 to 10.

13. A lubricating oil additive concentrate for use in the finished lubricating oil composition of claim 12 which comprises a lubricating oil base stock and sufficient of a compound as claimed in claims 1 to 10 to give a concentration of from 0.1 to 10% w/w in the finished lubricating oil composition.

Patentansprüche

1. Verbindungen, geeignet zur Verwendung als Extremdruck/Antiverschleißmittel [(EP)/(AW)-Mittel] in Schmierölzusammensetzungen, wobei die Verbindungen die Formel:




aufweisen, worin R¹ entweder R-S- oder Wasserstoff bedeutet,




R unabhängig voneinander entweder Kohlenwasserstoff oder substituierten Kohlenwasserstoff darstellt und

X einen heterocyclischen Ring mit 6 Atomen umfaßt, wobei 2 davon Stickstoffatome sind.


- 5 2. Verbindungen nach Anspruch 1 der Formel:




3. Verbindungen nach einem der Ansprüche 1 oder 2, nämlich Pyridazine der Formel:



4. Verbindungen nach einem der Ansprüche 1 oder 2, nämlich Pyrimidine der Formel:

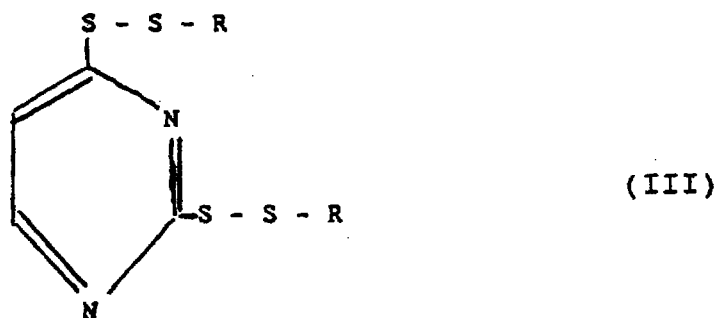


5. Verbindungen nach einem der Ansprüche 1 oder 2, nämlich Pyrazine der Formel:

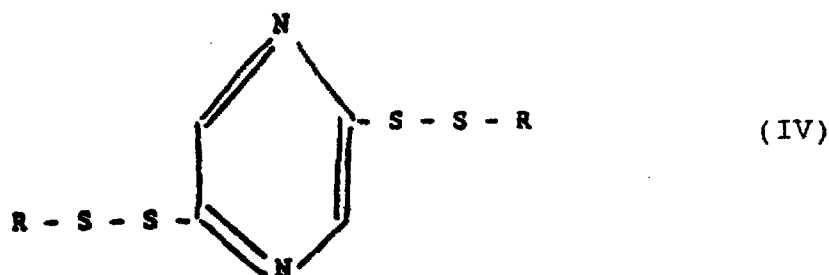


6. Verbindungen nach einem der Ansprüche 1 oder 2, wobei die Gruppe X eine kondensierte heterocyclische Ringgruppe ist.

7. Verbindungen nach Anspruch 6, wobei die Verbindung entweder Phthalazin oder Chinoxalin ist.



8. Verbindungen nach Anspruch 6, nämlich die der Formel:

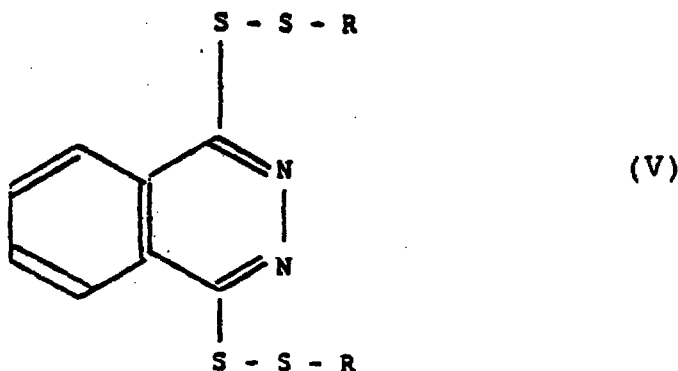


9. Verbindungen nach einem der vorangehenden Ansprüche, wobei die Gruppen R Alkylgruppen mit ausreichend Kohlenstoffatomen zur Verleihung von Öllöslichkeit sind.

10. Verbindungen nach Anspruch 9, worin die Gruppen R Alkylgruppen mit mindestens 4 Kohlenstoffatomen sind.

11. Verfahren zur Herstellung von Verbindungen der Formel (I) gemäß Anspruch 1 bis 10, wobei das Verfahren die Schritte umfaßt:

(A) Umsetzen eines Thiols der Formel RSH (VI), worin R gemäß Formel (I) ist, mit Thioharnstoff und Wasserstoffperoxid in wässrig alkoholischem Medium in Gegenwart einer salzbildenden Säure unter Herstellung eines Salzes der Formel:



(B) Umsetzen des Salzes der Formel (VII) mit einer Verbindung der Formel:



worin X gemäß Formel (I) ist, in wässrig alkoholischem Medium unter basischen Bedingungen zu einer Verbindung der Formel (I) und


(C) Gewinnen der in Schritt (B) hergestellten Verbindung der Formel (I).

12. Fertige Schmierölzusammensetzung, umfassend ein Schmiergrundölgemisch und eine EP/AW-verbessernde Menge einer Verbindung gemäß Ansprüchen 1 bis 10.

13. Schmieröladditivkonzentrat zur Verwendung in der Fertigschmierölzusammensetzung nach Anspruch 12, umfassend ein Schmiergrundölgemisch und eine ausreichende Menge einer Verbindung gemäß Ansprüchen 1 bis 10 für eine Konzentration von 0,1 bis 10 % Gew./Gew. in der Fertigschmierölzusammensetzung.

Revendications


1. Composés aptes à être utilisés comme agents anti-usure (AW) sous pressions extrêmes (EP) dans des compositions d'huiles lubrifiantes, composés dont la formule est :






dans laquelle R^1 est soit $R-S^+$, soit l'hydrogène,
 R est indépendamment, soit un hydrocarbyle, soit un hydrocarbyle substitué, et
 X comprend un noyau hétérocyclique comprenant six atomes dont deux sont des atomes d'azote.


2. Composés selon la revendication 1 dont la formule est :




3. Composés selon la revendication 1 ou la revendication 2 qui sont des pyridazines dont la formule est



4. Composés selon la revendication 1 ou la revendication 2 qui sont des pyrimidines dont la formule est :

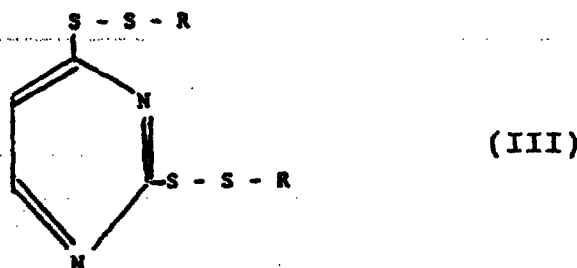

5. Composés selon la revendication 1 ou la revendication 2 qui sont des pyrazines dont la formule est :

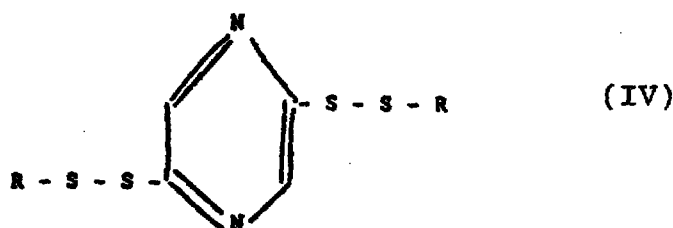


6. Composés selon la revendication 1 ou la revendication 2 dans lequel le groupe X est un groupe hétérocyclique à groupe cyclique condensé.

7. Composés selon la revendication 6 dans lequel le composé est, soit une phthalazine, soit une quinoxaline.



8. Composé selon la revendication 6 dont la formule est :




9. Composés selon l'une quelconque des revendications précédentes dans lesquels les groupes R sont des groupes alkyle contenant un nombre suffisant d'atomes de carbone pour communiquer une solubilité dans l'huile.

10. Composés selon la revendication 9 dans lesquels les groupes R sont des groupes alkyle contenant au moins 4 atomes de carbone.

11. Procédé de production de composés de formule (I) selon les revendications 1 à 10, procédé qui comprend les étapes consistant à :

(A) faire réagir un thiol de formule RSH (VI) dans laquelle R est le même que dans la formule (I) avec de la thio-urée et de l'eau oxygénée dans des milieux alcooliques aqueux en présence d'un acide formant un sel afin de produire un sel de formule :



(B) faire réagir le sel de formule (VII) avec un composé de formule :



où X est le même que dans la formule (I), dans des milieux alcooliques aqueux dans des conditions basiques pour produire le composé de formule (I), et
(C) récupérer le composé de formule (I) produit à l'étape (B).

12. Une composition finie d'huile lubrifiante comprenant une huile lubrifiante comme matière de base et une quantité de composé selon l'une des revendications 1 à 10 qui améliore les caractéristiques anti-usure sous extrêmes pressions.

13. Un concentré d'additif pour huile lubrifiante anti-usure à utiliser dans une composition d'huile lubrifiante finie selon la revendication 12 qui comprend une huile lubrifiante comme matière de base et une quantité suffisante de composé selon l'une des revendications 1 à 10 pour donner une concentration comprise entre 0,1 et 10 % en poids dans la composition de l'huile lubrifiante finie.