



- (51) **International Patent Classification:**
E21B 7/08 (2006.01) *E21B 29/06* (2006.01)
E21B 23/00 (2006.01)
- (21) **International Application Number:** PCT/US2011/057603
- (22) **International Filing Date:** 25 October 2011 (25.10.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/917,070 1 November 2010 (01.11.2010) US
- (71) **Applicant (for all designated States except US):** HAL-LIBURTON ENERGY SERVICES, INC. [US/US];
2601 Beltline Road, Carrollton, TX 75006 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** SAURER, Dan [US/US]; 1516 Summertree, Richardson, TX 75082 (US).
- (74) **Agent:** YOUST, Lawrence, R.; Lawrence Youst PLLC,
One Waterway Court, Suite 3b, The Woodlands, TX 77380 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) **Title:** REDUNDANT POSITION REFERENCE SYSTEM FOR MULTILATERAL EXIT CONSTRUCTION AND METHOD FOR USE OF SAME

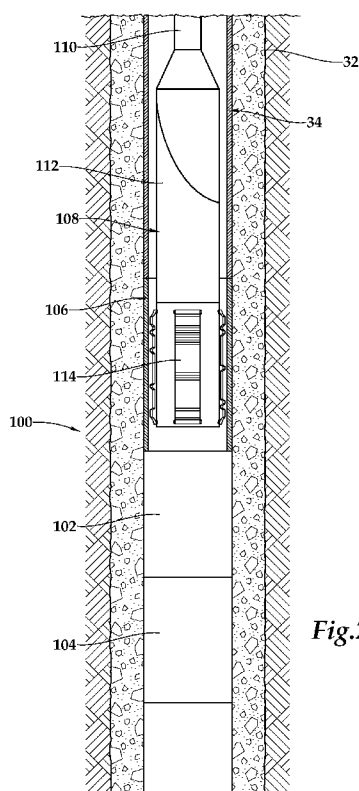


Fig.2

(57) **Abstract:** A position reference system (100) for multilateral exit construction in a wellbore (32). The system (100) includes a casing string (34) having a window joint (106) and a pair of latch couplings (102, 104) interconnected therein and positioned in the wellbore (32). The first latch coupling (102) has a first inner profile operably engagable with a mating profile of a first latch assembly (114) to anchor and orient the first latch assembly (114) relative to the window joint (106). The second latch coupling (104) has a second inner profile that is different from the first inner profile of the first latch coupling (102). The second inner profile is operably engagable with a mating profile of a second latch assembly (124) to anchor and orient the second latch assembly (124) relative to the window joint (106).



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

(88) Date of publication of the international search report:

12 July 2012

Published:

— *with international search report (Art. 21(3))*