



(51) International Patent Classification:
E02D 13/04 (2006.01)

(21) International Application Number:
PCT/GB2011/050004

(22) International Filing Date:
4 January 2011 (04.01.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1000096.6 5 January 2010 (05.01.2010) GB

(71) Applicant (for all designated States except US): **FAST FRAMES (UK) LTD** [GB/GB]; Unit 3 Hawthorn Farm, Winterborne Stickland, Blandford Forum, Dorset DT11 0NB (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MACK, James Ewart Milligan** [GB/GB]; 7 Morrison Road, Swanage, Dorset BH19 1JL (GB). **GUNTER, David Howel** [GB/GB]; 1 Benmoor Road, Creekmoor, Poole, Dorset BH17 7DS (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: METHOD AND APPARATUS FOR DRIVING A PILE INTO A SUBSTRATE

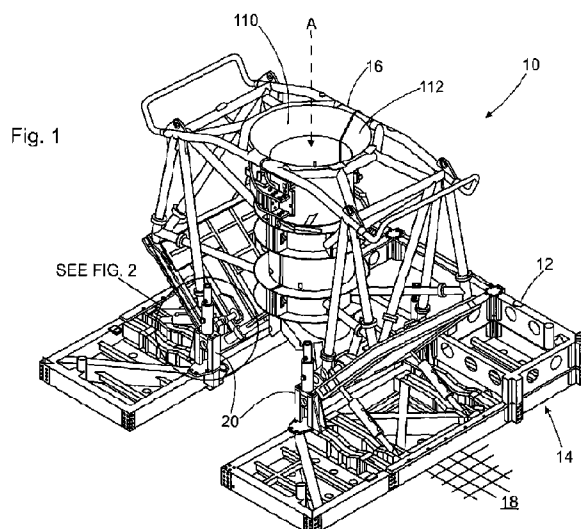

(57) Abstract: A pile guide (10) for supporting a pile as it is driven into a substrate, comprising: a base frame (12) having a planar substrate-engaging surface (14) and a pile guide member (16) configured to guide a pile in a predetermined direction therethrough as it is driven into a substrate (18), the pile guide member (16) being mounted on the base frame (12) via a plurality of support members (20) extending therebetween; characterised in that at least one of the plurality of support members (20) has an adjustable length, with length adjustment of the or each support member (20) enabling the predetermined direction to be varied relative to the planar substrate-engaging surface (14) of the base frame (12).