




[図1]

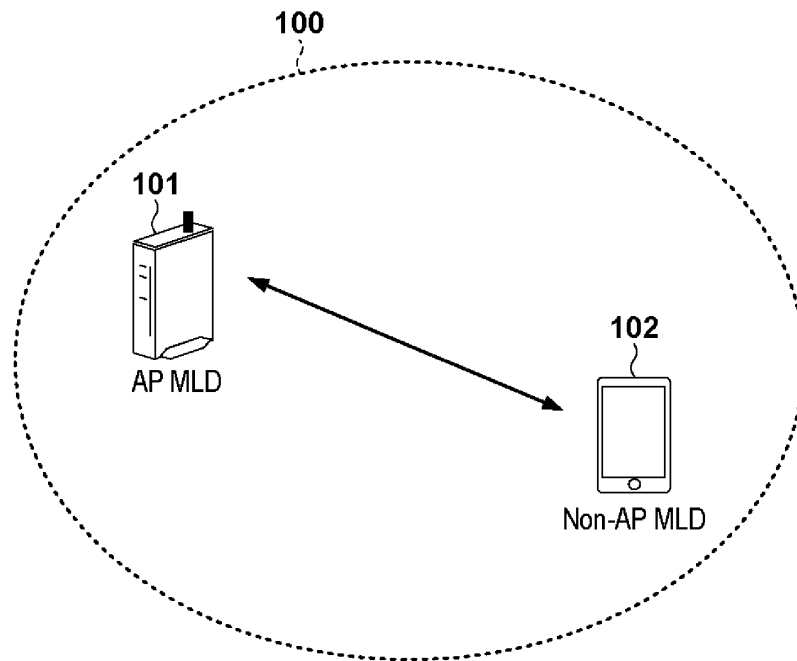


[図2]

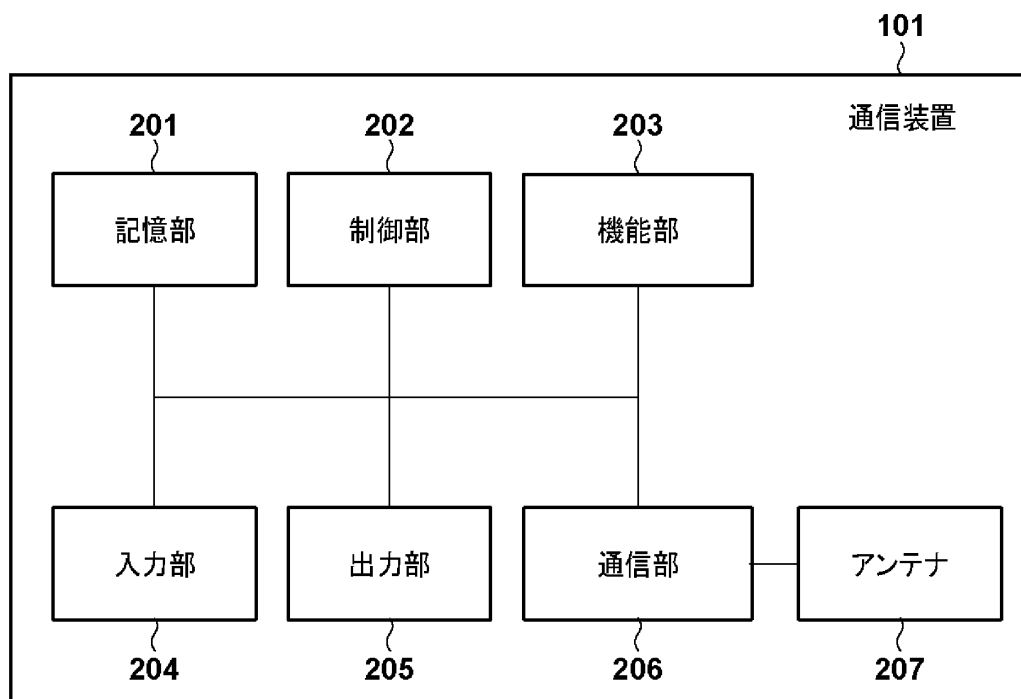


[図3]

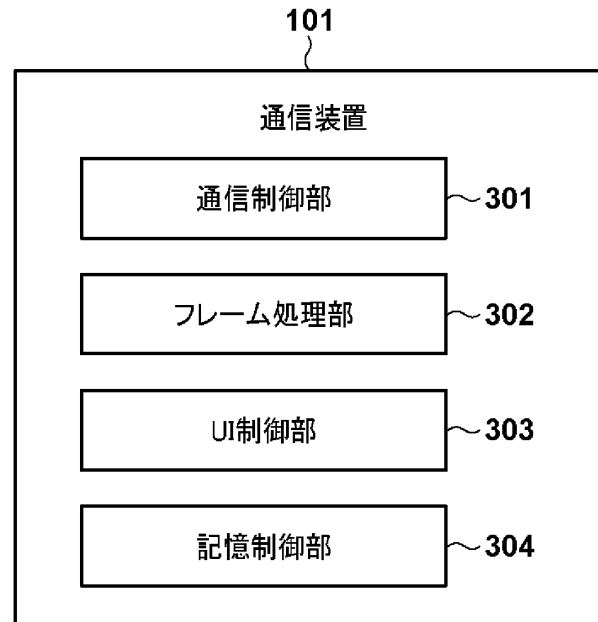


[図4]

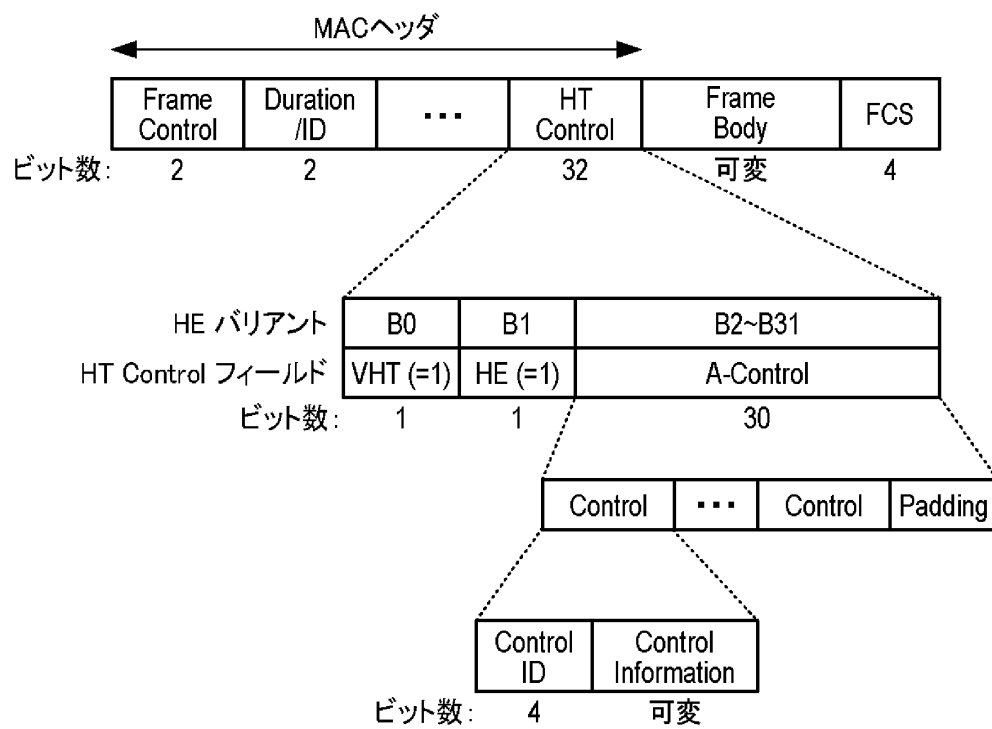


[図5A]

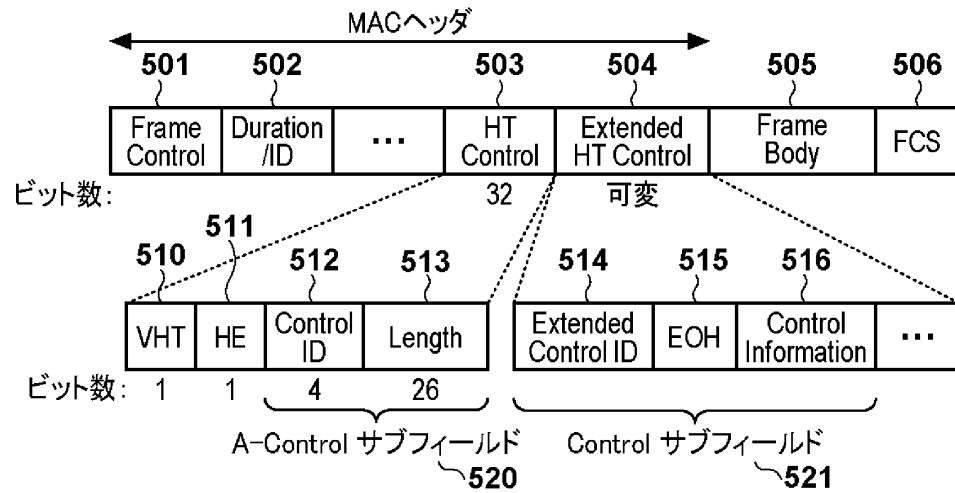

[図5B]

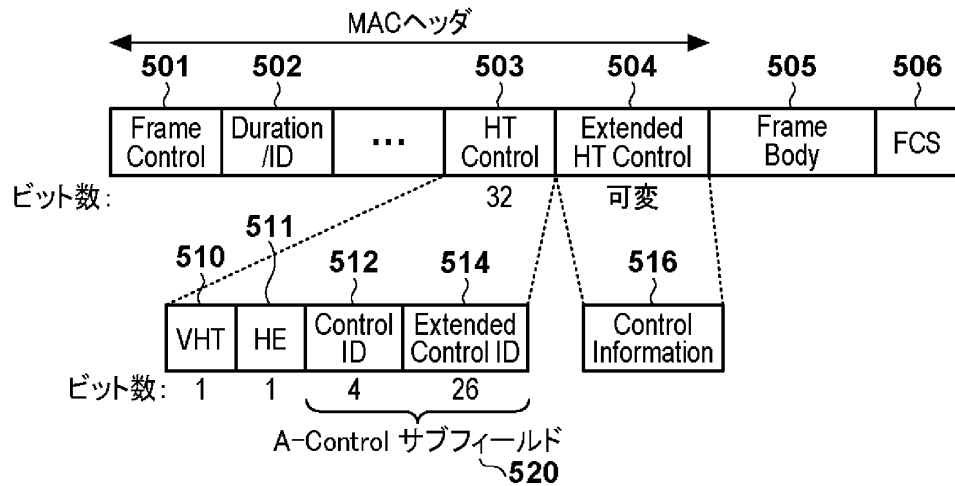

[図5C]

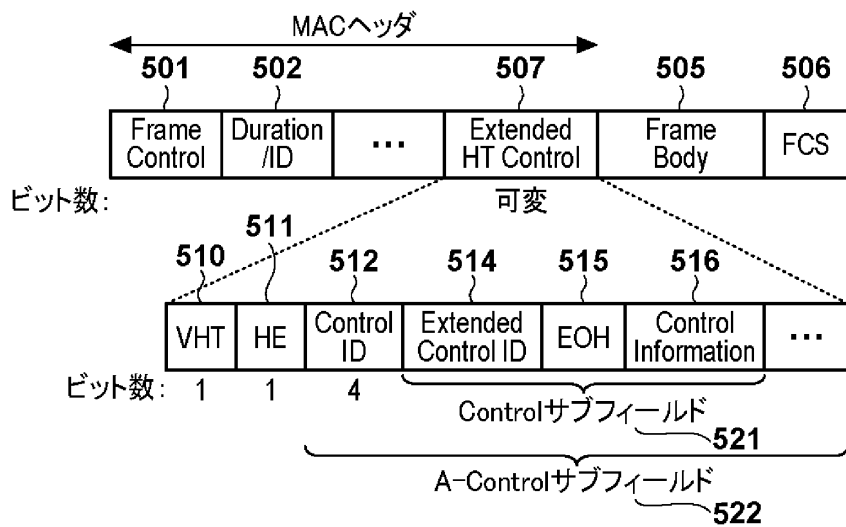

[図6]

| 制御ID値    | 意味                                  |
|----------|-------------------------------------|
| 0        | Triggered response scheduling (TRS) |
| 1        | Operating mode (OM)                 |
| 2        | HE link adaptation (HLA)            |
| 3        | Buffer status report (BSR)          |
| 4        | UL power headroom (UPH)             |
| 5        | Bandwidth query report (BQR)        |
| 6        | Command and status (CAS)            |
| 7        | EHT operating mode (EHT OM)         |
| 8        | Single response scheduling SRS      |
| 10       | AP assistance report (AAR)          |
| 9, 11-13 | Reserved                            |
| 14       | Extended Control                    |
| 15       | Ones need expansion surely (ONES)   |

[図7]

