

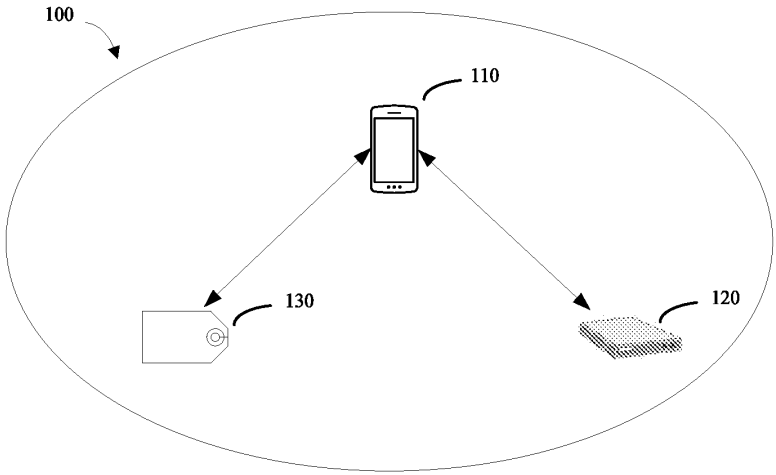


FIG. 1

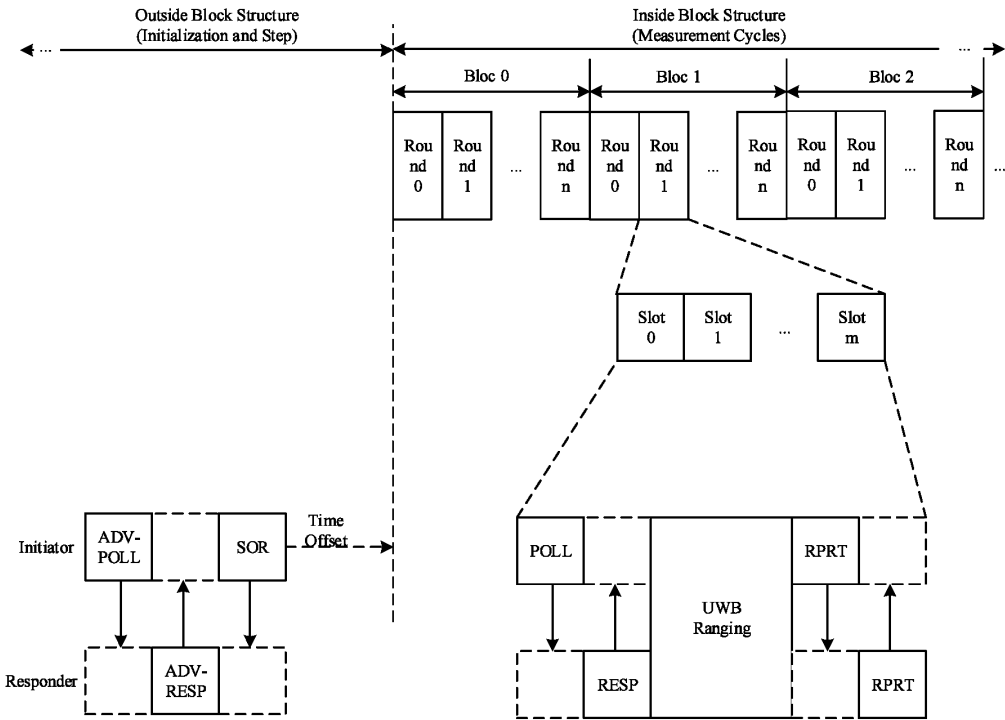


FIG. 2

Octet: 1	3	0 or 3	1	Variable	2/4/8/16
ID	RPA_hash	RPA_pran d	Message Control	Message Content	CRC/MIC

FIG. 3

Octets: 1/2	0/1	0/2	0/2/8	0/2/0/28	0/2/8	Variable	Variable		Variable	2/4
Frame Control	Sequence Number	Destinatio n PAN ID	Destinatio n Address	Source PAN ID	Source Address	Auxiliary Security Header	IE		Frame Payload	FCS
		Addressing Fields					Header IEs	Payload IEs		
MHR							MAC Payload		MFR	

FIG. 4

Bits: 0-2	3	4	5	6	7	8	9	10-11	12-13	14-15
Frame Type	Security Enabled	Frame Pending	AR	PAN ID Compress ion	Reserved	Sequence Number Suppressi on	IE Present	Destination Addressing Mode	Frame Version	Secure Addressing Mode

FIG. 5

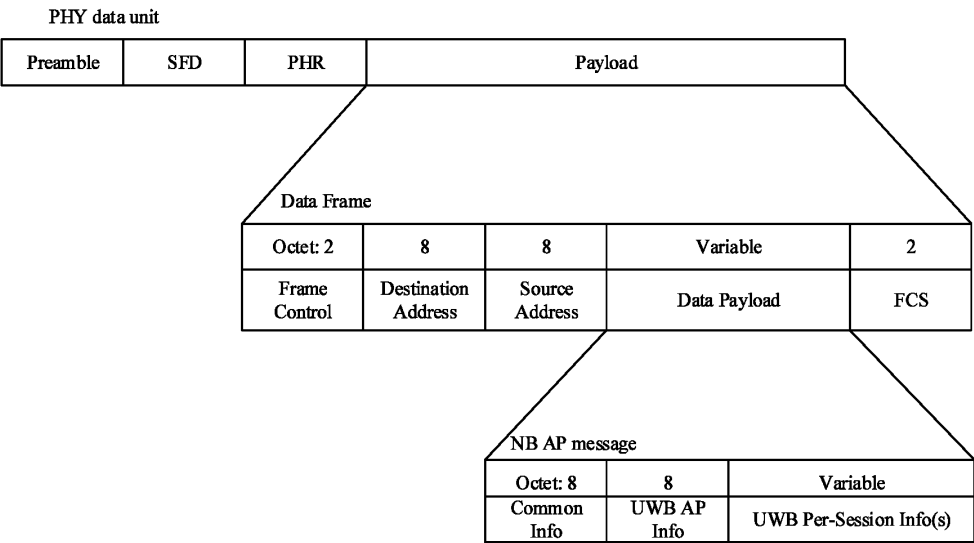


FIG. 6

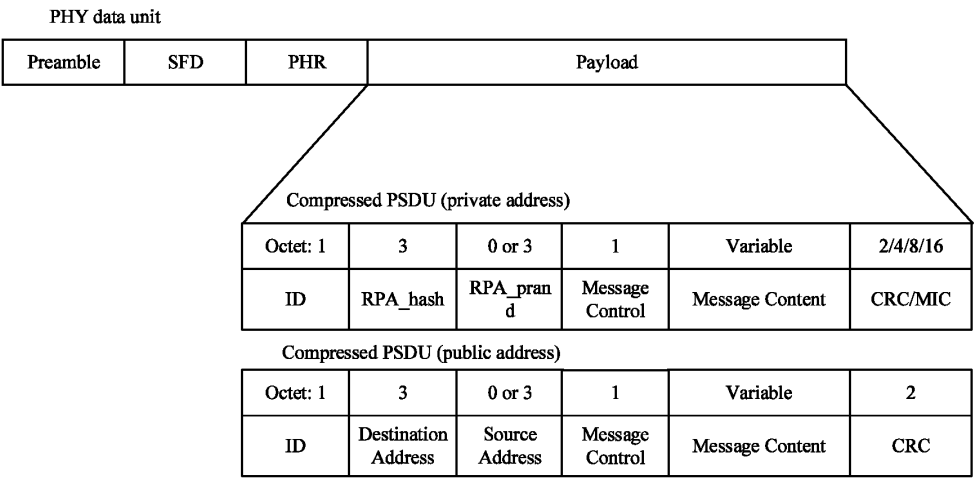


FIG. 7

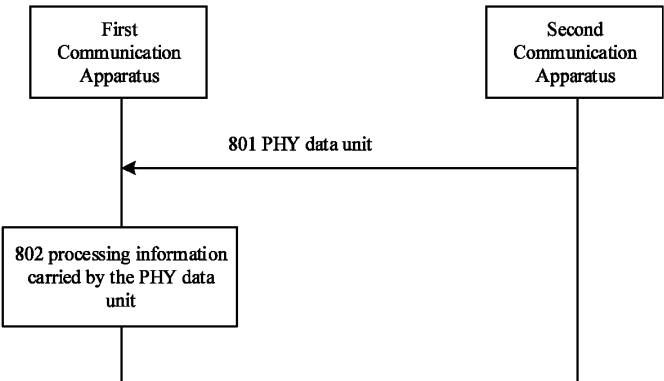


FIG. 8

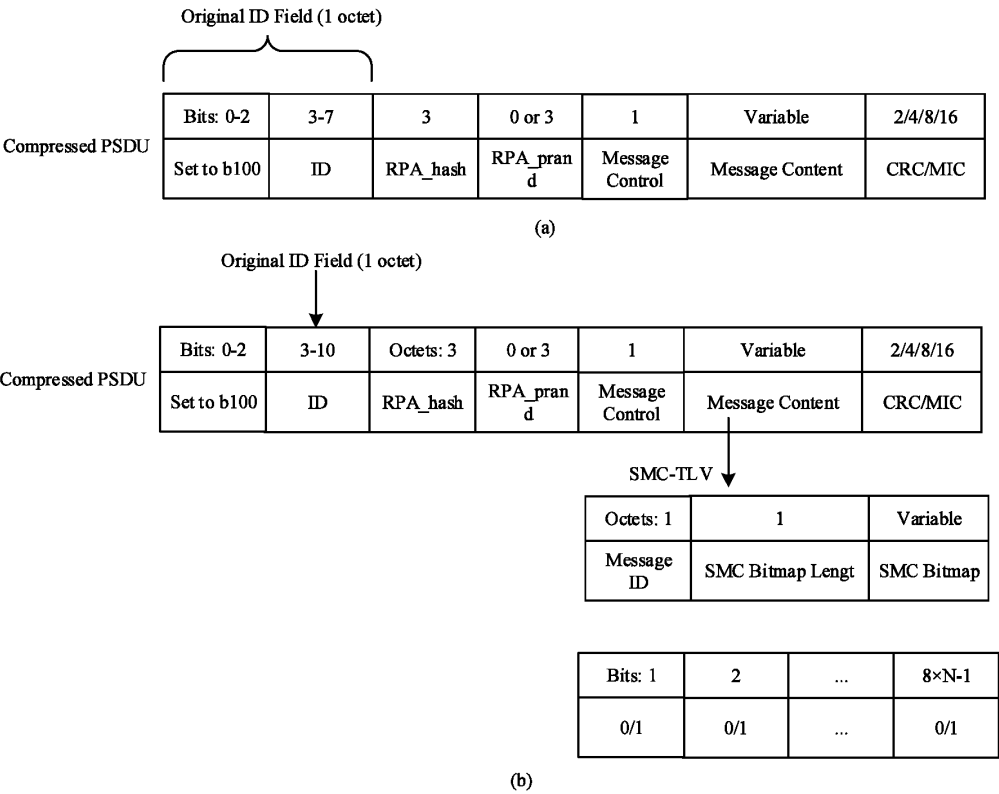


FIG. 9

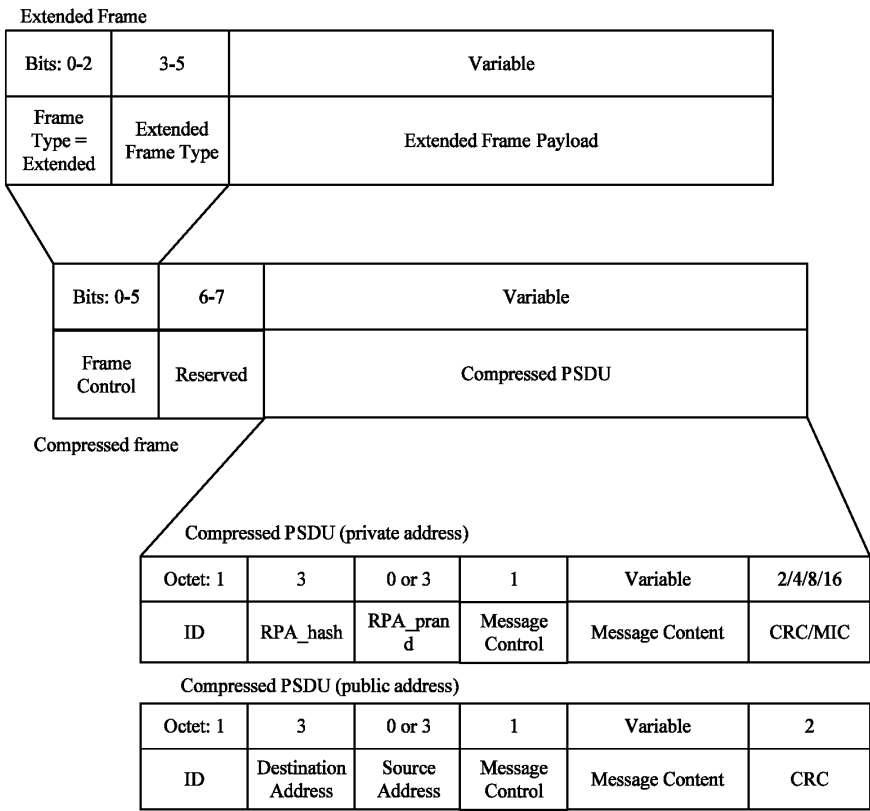


FIG. 10

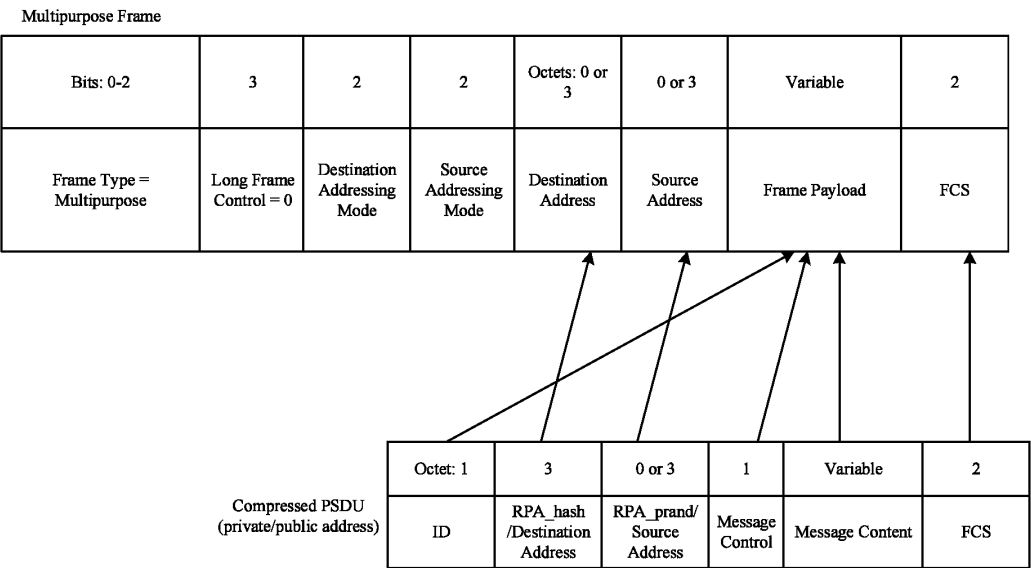


FIG. 11

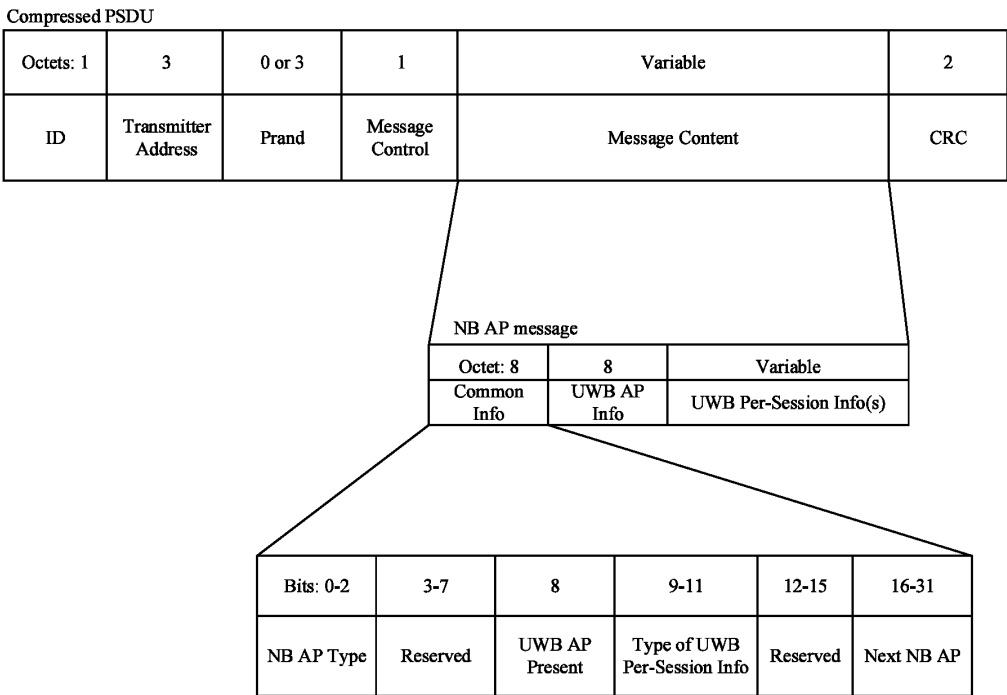


FIG. 12

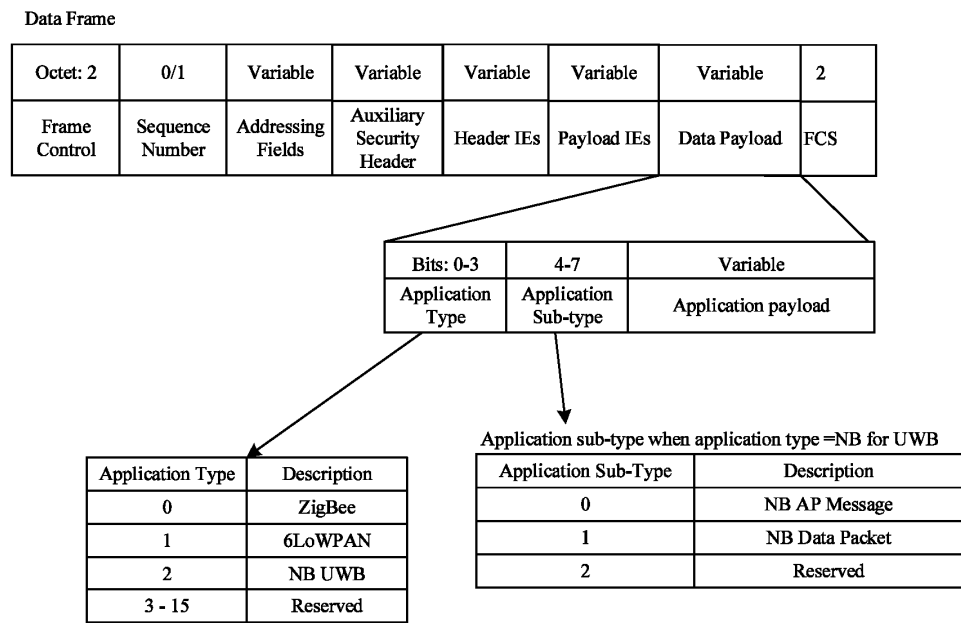


FIG. 14

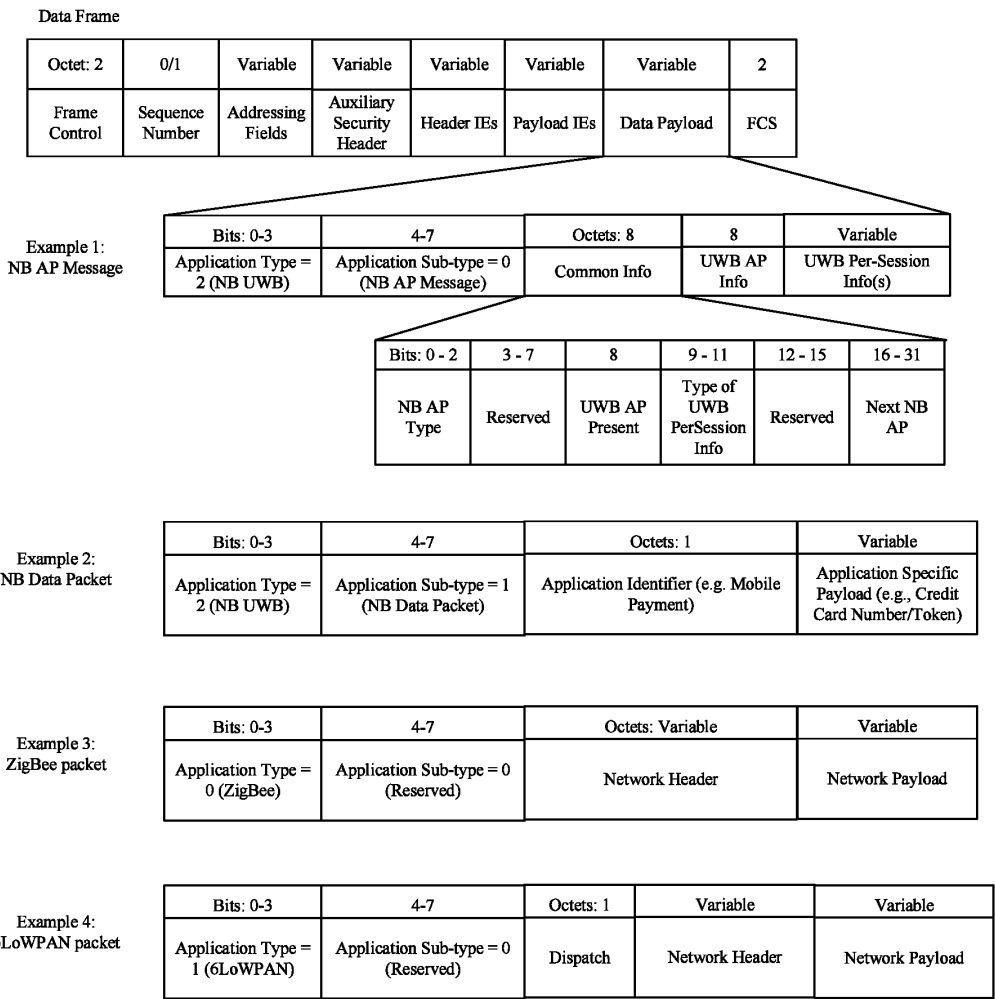


FIG. 15




FIG. 16

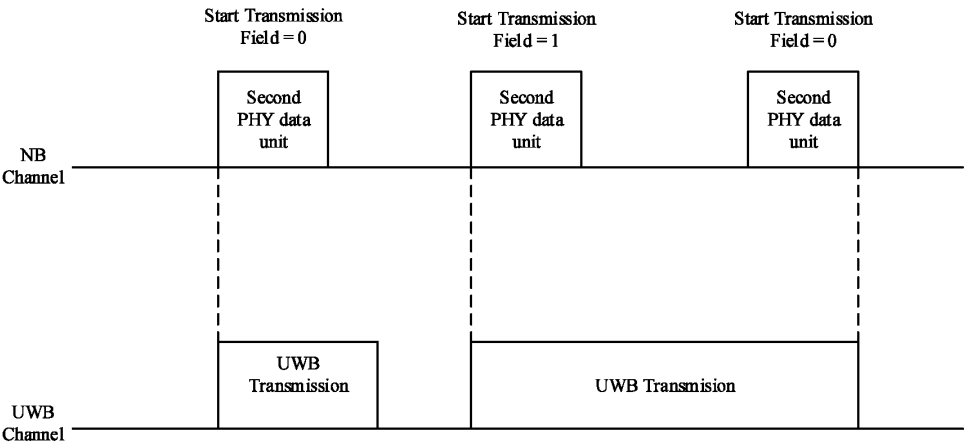


FIG. 17

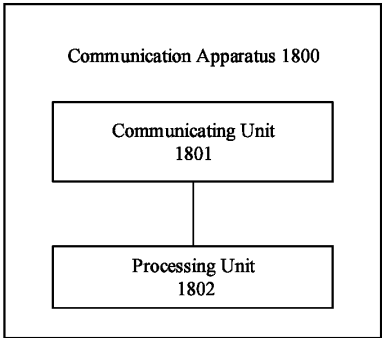


FIG. 18

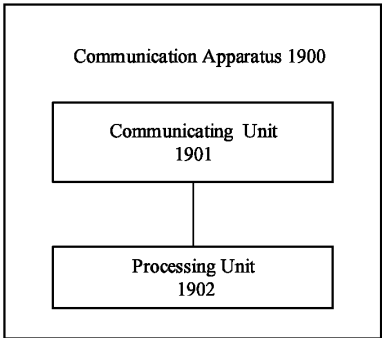


FIG. 19

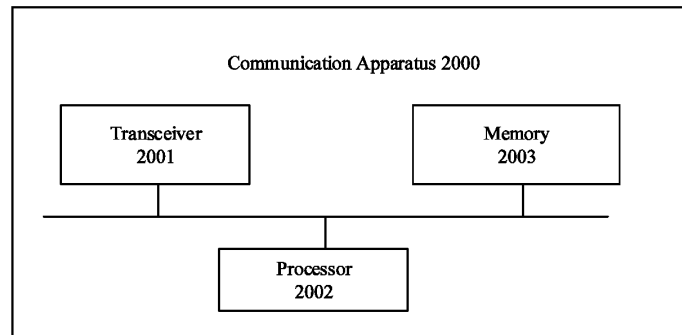


FIG. 20