



(51) International Patent Classification:

B65D 39/08 (2006.01) *B65D 41/17* (2006.01)
B65D 41/08 (2006.01) *B65D 51/18* (2006.01)

(21) International Application Number:

PCT/EP2015/000239

(22) International Filing Date:

6 February 2015 (06.02.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/936,984 7 February 2014 (07.02.2014) US

(71) Applicant: MAUSER-WERKE GMBH [DE/DE];
Schildgesstr. 71-163, 50321 Brühl (DE).

(72) Inventors: JULIEN, Robert, Alan; 1313 Peshtigo Avenue,
Naperville, IL 60564 (US). JULIEN, Adam, Donald;
570 Heritage Drive, Oswego, IL 60543 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: TAMPER EVIDENT CAP

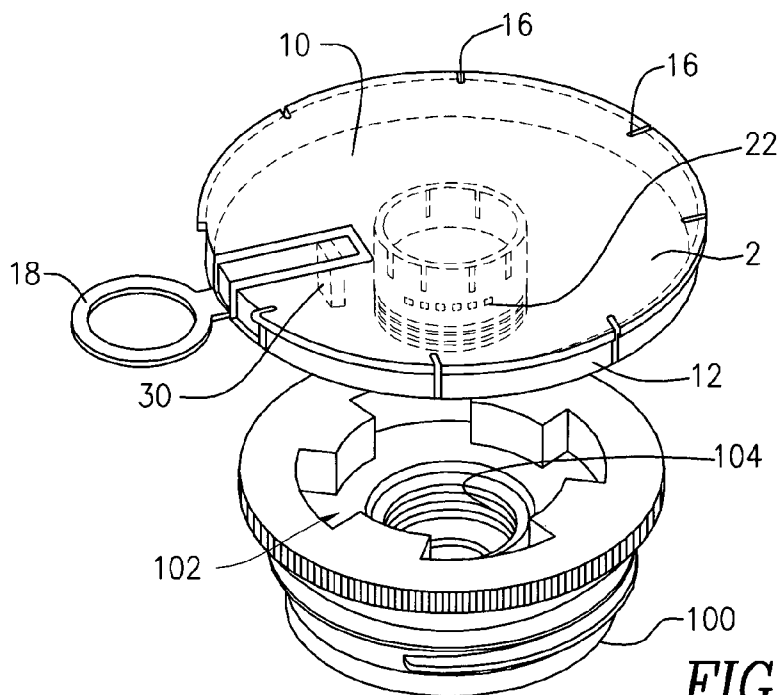


FIG. 5

(57) Abstract: A tamper-evident cap (2) for engagement to a container closure plug (100), the cap including a panel (10) having a container closure plug-facing side and a preweakened region defining a tear strip (17), the tear strip having a tear strip pin (30) extending from the closure plug-facing side and configured for receipt by the container closure plug, a sidewall (12) extending from the closure plug-facing side, and a center post (20) extending axially from a central region of the panel, wherein the center post is configured to engage the container closure plug, the center post having a post preweakened region.





Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))