

TONER AND IMAGE FORMING METHOD

FIELD OF THE INVENTION AND RELATED ART

The present invention relates to a toner for
5 use in an image forming method, such as
electrophotography, electrostatic recording, magnetic
recording and toner jetting, and also an image forming
method using the toner, particularly a toner adopted
for heat fixation and an image forming method using
10 the toner.

Hitherto, a large number of electrophoto-
graphic processes have been known, inclusive of those
disclosed in U.S. Patents Nos. 2,297,691; 3,666,363;
and 4,071,361. In these processes, in general, an
15 electrostatic latent image is formed on a
photosensitive member comprising a photoconductive
material by various means, then the latent image is
developed with a toner, and the resultant toner image
is, after being transferred onto a transfer material
20 such as paper etc., via or without via an intermediate
transfer member, as desired, fixed by heating,
pressing, or heating and pressing, or with solvent
vapor to obtain a copy or print carrying a fixed toner
image. According to necessity, residual toner
25 remaining on the photosensitive member without
transfer is cleaned by various methods. The above
steps are repeated for successive image formation.

In recent years, such an image forming method is adopted not only in copying machines for reproducing originals for office use but also in printers as output devices for computers and personal copiers for individuals.

For this reason, such image forming apparatus are required to be smaller and lighter in weight and exhibit higher speed and higher reliability. Accordingly, mechanical parts constituting the apparatus tends to be composed of simpler elements. As a result, the toner is on the contrary required to exhibit a higher performance, and a better image forming machine cannot be achieved without improvement in toner performances.

For example, as means for fixing a toner image onto a recording material, such as paper, various methods and apparatus have been developed, including those of the pressure-heat fixation scheme using a heating roller and of the heat fixation scheme wherein a recording material is pressed by a pressing member to a heating member via a film.

In the heat-fixation scheme using a heating roller or a film, a surface carrying a toner image of a recording material or fixation sheet is pressed against a surface comprising a material exhibiting a reliability to a toner to be passed in contact therewith, thereby fixing the toner image onto the

fixation sheet. In this fixation scheme, as the heating roller or film surface and the toner image on the fixation sheet contact each other, a very good heat efficiency is attained for melt-attaching the toner image onto the fixation sheet to afford quick fixation, so that the scheme is very effective in electrophotographic image forming apparatus.

In the heat fixation scheme, however, in order to obviate a fixation failure caused by a lowering in temperature of a heat fixing member due to passage of fixation sheets and fixation in a low temperature environment, it is necessary to increase the heat capacity of the heat fixing member, thus requiring a large power supply. Accordingly, the realization of lower power consumption while retaining the fixability depends largely on improvement in toner performances, particularly an improvement in low-temperature fixability of the toner.

In the fixing step of, e.g., the pressure-heat fixation scheme, however, a hot roller surface and a toner image contact each other in a melted state and under a pressure, so that a part of the toner is transferred and attached to the fixing roller surface and then re-transferred to a subsequent fixation sheet to soil the fixation sheet. This is called an offset phenomenon and is remarkably affected by the fixing speed and temperature. Generally, the fixing roller

surface temperature is set to be low in case of a slow fixing speed and set to be high in case of a fast fixing speed. This is because a constant heat quantity is supplied to the toner image for fixation thereof regardless of a difference in fixing speed.

The toner on a fixation sheet is deposited in several layers, so that there is liable to occur a large temperature difference between a toner layer contacting the heating roller and a lowermost toner layer particularly in a hot-fixation system using a high heating roller temperature. As a result, a topmost toner layer is liable to cause a so-called high-temperature offset phenomenon in case of a high heating roller temperature, while a so-called low-temperature offset is liable to occur because of insufficient melting of the lowermost toner layer in case of a low heating roller temperature.

In order to solve the above problem, it has been generally practiced to increase the fixing pressure in case of a fast fixing speed in order to promote the anchoring of the toner onto the fixation sheet. According to this method, the heating roller temperature can be somewhat lowered and it is possible to obviate a high-temperature offset phenomenon of an uppermost toner layer. However, as a very high shearing force is applied to the toner layer, there are liable to be caused several difficulties, such as

a winding offset that the fixation sheet winds about the fixing roller, and the occurrence of a trace in the fixed image of a separating member for separating the fixation sheet from the fixing roller.

5 Particularly, in recent years, it has been required to reduce the length of a leading white marginal region on a recording sheet in order to provide a higher image reproducibility as a part of higher image qualities. However, as the leading while
10 marginal region is reduced, the fixation sheet is liable to be wound about the fixing member. Accordingly, it has been desired to improve the toner for obviating the winding about the fixing member.

 Accordingly, it has been awaited to develop a
15 toner which exhibits a low melt viscosity and a good fixability even at low temperatures and is free from winding or offset in either of high speed - high pressure fixation and low speed - low pressure fixation.

20 Japanese Laid-Open Patent Application (JP-A) 59-214860, JP-A 1-128071, JP-A 1-147465, JP-A 1-303447, JP-A 4-202307 and JP-A 4-353866 have disclosed electrophotographic toners having specific rheological properties, which have not succeeded in realization of
25 high degree of fixability and anti-offset property in combination, and also have left problems of the winding of the fixation sheet about the fixing roller

and traces of a separation claw in the resultant images.

JP-A 3-63661, JP-A 3-63662, JP-A 3-63663, JP-A 3-118552 and JP-A 3-197669 have disclosed a toner composition containing a resin (A) having a residual carboxyl group formed by reaction of a copolymer of a styrene monomer, a (meth)acrylate monomer and a carboxyl group-containing vinyl monomer with a polyvalent metal compound, and describes that a toner of the composition exhibits good fixability and good anti-offset property over a wide fixation temperature range. However, a toner of the composition exhibits a relatively large difference in dynamic elasticity between low and high temperatures to cause locally different fixation performances between an upper portion and a lower portion of a toner layer subjected to fixation, whereby the resultant recording sheet is liable to be curled and wound about the fixing member. Thus, a room for improvement has been left.

JP-A 6-11890 and JP-A 6-222612 have disclosed a toner containing a binder resin composition formed by reacting a COOH group-containing vinyl resin (A) and a glycidyl compound (B) and describes that the toner is applicable to a high-speed machine and exhibits a good balance among fixability, anti-offset properties and anti-blocking property. However, the toner also exhibits a large difference in dynamic

elasticity and requires a further improvement in obviating the winding of a recording sheet about the fixing member.

JP-A 4-199061 has disclosed a toner
5 comprising at least a resin, a colorant and a metal-containing compound, and having specific visco-elastic properties at temperatures of 100 - 200 °C. JP-A 7-82249 and Japanese Patent No. 2783671 disclose a toner comprising a resin and a metal salt or metal
10 complex and having specific visco-elastic properties at temperatures of 120 - 200 °C. However, these prior art references fail in disclosing visco-elastic properties at 160 °C and 190 °C, and the toners disclosed therein fail to exhibit performances
15 peculiarly satisfied by such visco-elastic properties at 160 °C and 190 °C as will be discussed hereinafter.

SUMMARY OF THE INVENTION

A generic object of the present invention is
20 to provide a toner having solved the above-mentioned problems and capable of exhibiting better performances.

A more specific object of the present invention is to provide a toner excellent in
25 fixability and anti-offset property at low temperatures.

Another object of the present invention is to

provide a toner excellent in anti-offset property at high temperatures.

Another object of the present invention is to provide a toner free from winding about a fixing
5 roller.

Another object of the present invention is to provide a toner free from resulting in traces of a separation claw in fixed toner images.

Another object of the present invention is to
10 provide a toner free from fog in fixed images.

Another object of the present invention is to provide a toner free from causing image white-dropout due to soiling of a fixing roller.

Another object of the present invention is to
15 provide a toner excellent in anti-blocking property.

Another object of the present invention is to provide a toner free from toner melt-sticking onto a photosensitive member.

A further object of the present invention is
20 to provide an image forming method using a toner as described above.

According to the present invention, there is provided a toner comprising: at least a binder resin, a wax and a colorant,

25 wherein the toner exhibits visco-elastic properties including:

(a) a storage modulus G' (160°C) of 8.0×10^2

- 1.2×10^4 Pa at 160°C ,

(b) a loss modulus G'' (160°C) of 4.0×10^2 - 6.0×10^3 Pa at 160°C ,

(c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.5 at 160°C ,

(d) a storage modulus G' (190°C) of 6.0×10^2 - 1.0×10^4 Pa at 190°C ,

(e) a loss modulus G'' (190°C) of 2.0×10^2 - 4.0×10^3 Pa at 190°C ,

(f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.05 - 1.2 at 190°C ,

(g) G' (160°C)/ G' (190°C) = 0.5 - 2.0, and

(h) $\tan\delta$ (160°C) > $\tan\delta$ (190°C).

According to another aspect of the present invention, there is provided an image forming method, comprising:

(1) a developing step of developing an electrostatic latent image on an image bearing member with the above-mentioned toner to form a toner image thereon,

(2) a transfer step of transferring the toner image formed on the image bearing member onto a recording material via or without via an intermediate transfer member, and

(3) a fixing step of heat-fixing the toner image transferred to the recording material onto the recording material.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graph showing visco-elastic properties of a toner according to the invention.

Figure 2 is a graph showing visco-elastic properties of a comparative toner.

Figure 3 is a GPC chromatogram for a THF-soluble content of a toner according to the invention.

Figure 4 illustrates an image forming apparatus capable of practicing an embodiment of the image forming method according to the invention.

Figure 5 shows an enlarged view of a developing section of the image forming apparatus shown in Figure 4.

Figure 6 illustrates an image forming apparatus capable of practicing another embodiment of the image forming method according to the invention.

Figure 7 is a block diagram of a facsimile apparatus including a printer to which an image forming method according to the invention is applicable.

Figure 8 is a schematic sectional illustration of a kneading machine suitable for use in production of a toner according to the invention.

Figure 9 is a detailed illustration of
5 paddles in the kneading machine.

Figure 10 illustrates a feed screw (S) in the screw section of the kneading machine.

Figure 11 illustrates a forward feed paddle (R) in the kneading section.

10 Figure 12 illustrates a residential or non-feed paddle (W) in the kneading section.

Figure 13 illustrates a reverse feed paddle (L) in the kneading section.

15 Figure 14 illustrates a paddle arrangement of a kneading machine applicable to toner production in the present invention.

Figure 15 illustrates a paddle organization of a kneading machine used in Example 1.

20 Figure 16 illustrates a paddle organization of a kneading machine used in Example 15.

DETAILED DESCRIPTION OF THE INVENTION

The toner according to the present invention is characterized by, among others, excellent low-
25 temperature fixability and anti-low-temperature offset property because of its characteristic visco-elastic properties of:

(a) a storage modulus G' (160°C) of 8.0×10^2 - 1.2×10^4 Pa, preferably 1.0×10^3 - 1.0×10^4 Pa, further preferably 2.0×10^3 - 8.0×10^3 Pa at 160°C ,

(b) a loss modulus G'' (160°C) of 4.0×10^2 - 6.0×10^3 Pa, preferably 5.0×10^2 - 5.0×10^3 Pa, further preferably 7.0×10^2 - 3.0×10^3 Pa at 160°C , and

(c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.5, preferably 0.1 - 1.0, further preferably 0.2 - 0.8 at 160°C .

10 The visco-elastic properties at 160°C of a toner affect particularly the fixability at a high speed or a low temperature. More specifically, the toner is required to melt quickly because of a short contact time between the toner and the heat-fixing member and have an elasticity so as not to cause low-
15 temperature offset. Because of the above-mentioned visco-elastic properties at 160°C , the toner according to the present invention can exhibit a good fixability even in a high-speed fixing system or at a
20 low temperature.

 If G' (160°C) is below 8.0×10^2 Pa, the heated and softened toner can only show a low rubber elasticity, so that the toner cannot be sufficiently separated from the fixing member, thus causing low-
25 temperature offset onto the fixing member. If G' (160°C) exceeds 1.2×10^4 Pa, the low-temperature fixability becomes inferior.

**THIS SHEET HAS BEEN
REPLACED**

If G'' (160°C) is below 4.0×10^2 Pa, the toner becomes softened from a lower temperature, thus being liable to result in traces of separation claw. If G'' (160°C) exceeds 6.0×10^3 Pa, a good low-temperature
5 fixability cannot be attained.

If $\tan \delta$ (160°C) is below 0.1, the storage modulus becomes too large relative to the loss modulus, and the toner excessively shows a property of an elastic material, so that the anti-low temperature-
10 offset property is improved but a sufficient low-temperature fixability cannot be attained. If $\tan \delta$ (160°C) exceeds 1.5, the toner is caused to have a high viscosity and a relatively low rubber elasticity, so that the toner is liable to cause melt-sticking
15 onto the photosensitive member, due to heat of friction with the cleaning blade.

Further, the toner according to the present invention exhibits excellent fixability and anti-high-temperature offset property because of its visco-
20 elastic properties of:

(d) a storage modulus G' (190°C) of 6.0×10^2 - 1.6×10^4 Pa, preferably 8.0×10^2 - 8.0×10^3 Pa, further preferably 1.0×10^3 - 6.0×10^3 Pa, at 190°C ,

(e) a loss modulus G'' (190°C) of 2.0×10^2 - 4.0×10^3 Pa, preferably 3.0×10^2 - 3.0×10^3 Pa, further
25 preferably 4.0×10^2 - 2.0×10^3 Pa, at 190°C , and

(f) a loss tangent $\tan \delta$ (190°C) = G'' (190

$^{\circ}\text{C})/G'$ (190°C) of 0.05 - 1.2, preferably 0.06 - 1.0, further preferably 0.08 - 0.8, at 190°C .

The visco-elastic properties at 190°C of a toner affect particularly the fixability at a low speed or a high temperature. More specifically, in a low-speed fixing system, the toner contacts the fixing member for a longer time, so that an upper portion of the toner layer on the fixation sheet is liable to attach to the heating roller, thus causing high-temperature offset. Accordingly, a toner is required to exhibit a sufficient elasticity separable from the fixing member even at high temperatures and a viscosity allowing the fixation onto the fixation sheet. Because of the above-mentioned visco-elastic properties at 190°C , the toner according to the present invention can exhibit good fixing performances even in a low-speed fixation system or at a high temperature.

If G' (190°C) is below 6.0×10^2 Pa, the heated and softened toner can only show a low rubber elasticity, so that the toner cannot be sufficiently separated from the fixing member, thus causing high-temperature offset onto the fixing member. If G' (190°C) exceeds 1.0×10^4 Pa, the toner exhibits too high a rubber elasticity, so that the toner shows an inferior fixability onto the fixation sheet.

If G'' (190°C) is below 2.0×10^2 Pa, the toner



causes an excessive lowering in viscosity when passing along the fixing member, thus being liable to attach onto the fixing member and cause the winding of the fixation sheet about the fixing member. If G'' (190 °C) exceeds 4.0×10^3 Pa, a good fixability cannot be attained.

If $\tan \delta$ (190 °C) is below 0.05, the storage modulus becomes too large relative to the loss modulus, and the toner excessively shows a property of an elastic material, so that the anti-high temperature offset property is improved, but a sufficient fixability cannot be attained. If $\tan \delta$ (190 °C) exceeds 1.2, the toner is caused to have a high viscosity and a relatively low elasticity, so that the toner fixability onto the fixation sheet and the toner releasability from the fixing member are liable to be insufficient, thus causing high-temperature offset of the toner onto the fixing member.

Further, the toner according to the present invention can effectively prevent the winding of the fixation sheet about the fixing member because of $G' (160 \text{ °C})/G'' (190 \text{ °C})$ of 0.5 - 2.0, preferably 0.6 - 1.8, further preferably 0.7 - 1.5.

As for a toner layer on the fixation sheet, an upper portion closer to the fixing member is easily heated compared with a lower portion closer to the fixation sheet. Accordingly, if a toner exhibits

visco-elastic properties which are remarkably different depending on temperature, the upper portion and the lower portion of a toner layer are not uniformly transferred at the time when the toner layer is heated and pressed, thus causing a curling of the fixation sheet carrying the fixed toner image leading to the winding of the fixation sheet about the fixing member in some cases. However, such winding about the fixing member can be obviated by the toner according to the present invention which exhibits only a small difference between $G' (160^{\circ}\text{C})$ and $G' (190^{\circ}\text{C})$.

If $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C})$ is below 0.5, the winding about the fixing member can be prevented, but a severe downward curling of the fixation sheet can be caused. If $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C})$ exceeds 2.0, the winding of the fixation sheet about the fixing member (particularly a heating roller) is liable to be caused. The downward curling and the winding of the fixation sheet are especially noticeably caused when an image having a high image (density) ratio, such as a solid black image, is fixed.

Further, the toner according to the present invention can effectively prevent the toner attachment onto the fixing member because $(h) \tan \delta (160^{\circ}\text{C}) > \tan \delta (190^{\circ}\text{C})$.

When a toner is passed along the fixing member, some portion of the toner is inevitably offset

to the fixing member even by a toner of a good
fixability. The offset toner is heated to a
temperature which is higher than the ordinary toner
fixation temperature because it is held on the fixing
5 member. At this time, as the toner according to the
present invention retains a storage modulus G'
comparable to that at an ordinary fixation
temperature, the elastic property of the toner is
retained to facilitate the separation of the toner
10 from the fixing member. At the same time, as the
toner has a loss modulus which is lower than that at
an ordinary fixation temperature, the toner is caused
to have a lower viscosity which facilitate the
separation of the toner from the fixing member.

15 In case of $\tan \delta (160^\circ\text{C}) \leq \tan \delta (190^\circ\text{C})$,
the toner is accumulated on the fixing member surface
after the use of the fixing member for a long time, so
that the fixed images are accompanied with white
dropout at the corresponding part.

20 It is further preferred that the toner
according to the present invention does not assume a
minimum of $\tan \delta$ in a temperature range of $80^\circ\text{C} - 200^\circ\text{C}$, so as to effectively prevent the toner attachment
onto the fixing member.

25 Visco-elastic properties described herein are
based on values measured under the following
conditions.

Apparatus: Rheometer RDA-II type (available from Rheometrics Co.)

Sample holder: Parallel plates having a diameter of 7.9 mm.

5 Sample: A toner or a binder resin is heat-molded into a disk of ca. 8 mm in diameter and 2 - 5 mm in height.

Measurement frequency: 6.28 rad/sec.

Setting of measurement strain: Initially set to
10 0.1 %, followed by measurement in an automatic measurement mode.

Correction of sample elongation: Adjusted in an automatic measurement mode.

Measurement temperatures: From 35 °C to 200 °C at
15 a temperature-increasing rate of 2 °C/min.

An example of the measured results for a toner of the present invention is shown in Figure 1.

Based on a GPC (gel permeation chromatography) chromatogram of its THF
20 (tetrahydrofuran)-soluble content, the toner according to the present invention may preferably exhibit such a molecular weight distribution based on a GPC chromatogram to provide a main peak in a molecular weight region of 3×10^3 - 4×10^4 and contain 1.0 - 5.0 %
25 (by area on the chromatogram) of components in a molecular weight range of 1×10^5 - 2×10^5 , 1.0 - 5.0 % of components in a molecular weight range of 2×10^5 -

5×10^5 , 0.5 - 5.0 % of components in a molecular weight range of 5×10^4 - 1×10^6 , and 0.2 - 6.0 % of components in a molecular weight range of 1×10^6 or larger.

If the toner contains a THF-soluble content
5 satisfying the above-mentioned molecular weight distribution characterized by definitions of specific proportions in respective molecular weight regions, it becomes possible to effectively improve the low-temperature fixability and anti-high-temperature
10 offset property of the toner. By having a main peak in a molecular weight region of 3×10^3 - 4×10^4 , the toner is provided with an improved low-temperature fixability. Further, by containing a substantial amount of components in a molecular weight region of
15 1×10^6 or more, the toner is provided with an improved anti-high-temperature offset property.

Further, by the presence of the components of intermediate molecular weight regions between the molecular weight region of 3×10^3 - 4×10^4 and the
20 molecular weight region of 1×10^6 or higher, in addition to the components in the molecular weight region of 3×10^3 - 4×10^4 , the components in the molecular weight region of 1×10^6 or higher and the crosslinked high-molecular weight components, it is
25 possible to prevent the deterioration of anti-high-temperature offset property liable to be caused by a lowering of the melt-viscosity given by the high-

molecular weight components due to intrusion of low-molecular weight components having shorter molecular chains into gaps between the high-molecular weight components. Particularly, the components in the
5 molecular weight region of 1×10^5 - 2×10^5 exhibits a good comparability with the low-molecular weight components and suppresses the migration of the low-molecular weight components into molecular chains of the high-molecular weight components. The components
10 in the molecular weight region of 1×10^5 - 1×10^6 exhibit good compatibility with the high-molecular weight components, thus effectively preventing the intrusion of the low-molecular weight components into the molecular chains of the high-molecular weight
15 components. The components in the molecular weight region of 2×10^5 - 5×10^5 assist the functions of the components in the lower and higher molecular weight regions.

As a further effect attained by the presence
20 of the components in the molecular weight region of 5×10^5 - 1×10^6 , the components can improve the dispersion of the low-molecular weight component and the high-molecular weight component in the toner. The low-molecular weight component and high-molecular
25 weight component have inherently different melt-viscosities, so that they are not readily blended with each other during toner production by melt-kneading

under heating, thus being liable to cause localization of the toner ingredients and providing toner particles having mutually different molecular weight distributions. As a result, there can be copresent
5 toner particles rich in relatively hard high-molecular weight component and toner particles rich in relatively soft low-molecular weight component, thus causing an irregularity in toner chargeability leading to noticeable fog. By the presence of the component
10 in the intermediate molecular weight region of 5×10^5 - 1×10^6 promoting the blending between the low-molecular weight component and the high-molecular weight component, it becomes possible to prevent noticeable localization of these components in the toner. As a
15 result, it becomes possible to reduce the abnormally chargeable component in the toner, thus reducing the fog in the resultant images.

If a main peak is present in a molecular weight region of below 3×10^3 , the anti-blocking
20 property of the toner is liable to be inferior. If a main peak is present in a molecular weight region in excess of 4×10^4 , it becomes difficult to obtain a sufficient low-temperature fixability. If the component in the molecular weight region of 1×10^6 or
25 higher is present at below 0.2 %, the anti-high-temperature offset property is liable to be inferior. If the component of 1×10^6 or higher is present in

excess of 6.0 %, the low-temperature fixability is liable to be inferior. If the content of the components in the molecular weight regions of 1×10^5 - 2×10^5 or 2×10^5 - 5×10^5 is less than 1.0 % or the content in the molecular weight region of 5×10^5 - 1×10^6 is below 0.5 %, it becomes difficult to attain improvements in the anti-high-temperature offset property and developing performance. If the content of the components in the molecular weight region of 1×10^5 - 2×10^5 , 2×10^5 - 5×10^5 or 5×10^5 - 1×10^6 exceeds 5.0 wt. %, the contents of the low-molecular weight component and the high-molecular weight components are relatively reduced, the low-temperature fixability or the anti-high-temperature offset property of the resultant toner is liable to be inferior, and the dispersion of starting materials of toner is liable to be insufficient due to failure in molecular weight balance, thus resulting in toner particles having fluctuation of chargeability and showing inferior developing performance.

It is further preferred that the binder resin and the wax in the toner according to the present invention contain a THF-insoluble content of 1 - 50 wt. %, preferably 1 - 40 wt. %, more preferably 5 - 40 wt. %, further preferably 5 - 35 wt. %, in order to provide excellent anti-high-temperature offset property. Herein, the THF-insoluble content refers to

a highly crosslinked high-molecular weight component, which is effective in providing the toner with a high elasticity, thus providing an improved releasability of the toner from the fixing member and an improved
5 anti-high-temperature offset property of the toner.

If the THF-insoluble content is below 1 wt. %, the fixed toner image is liable to be wound about the fixing member. If the THF-insoluble content exceeds 50 wt. %, the toner is liable to be
10 excessively hard to damage the photosensitive member and cause the toner melt-sticking onto the photosensitive member.

It is further preferred that the THF-soluble content of the toner according to the present
15 invention provides a GPC chromatogram showing a main peak in a molecular weight region of 4×10^3 - 3×10^4 and a sub-peak in a molecular weight region of 7×10^2 - 3×10^3 so as to provide a further better low-temperature fixability. If a sub-peak is present in a
20 molecular weight region of below 7×10^2 , the anti-blocking property of the resultant toner is liable to be inferior and, even if a sub-peak not overlapping with the main peak is present in a molecular weight region in excess of 3×10^3 , it is difficult to attain
25 an improvement in low-temperature fixability.

If the toner according to the present invention satisfies the above-mentioned molecular

weight distribution characteristic in addition to the visco-elastic properties, it is possible to achieve the low-temperature fixability, anti-low-temperature offset property and anti-high-temperature offset
5 property more effectively.

Further, by preventing the occurrence of troubles around the fixing device and the latent image-forming section, the occurrence of paper jamming is suppressed, thereby improving the reliability of
10 the image forming apparatus inclusive of continuous image forming performances.

The molecular weight distribution of THF-soluble contents of toners described herein are based on GPC measurement performed according to the
15 following manner.

In the GPC apparatus, a column is stabilized in a heat chamber at 40 °C, tetrahydrofuran (THF) solvent is caused to flow through the column at that temperature at a rate of 1 ml/min., and about 100 µl of
20 a GPC sample solution is injected. The identification of sample molecular weight and its molecular weight distribution is performed based on a calibration curve obtained by using several monodisperse polystyrene samples and having a logarithmic scale of molecular
25 weight versus count number. The standard polystyrene samples for preparation of a calibration curve may be those having molecular weights in the range of about

10^2 to 10^7 available from, e.g., Toso K.K. or Showa Denko K.K. It is appropriate to use at least 10 standard polystyrene samples. The detector may be an RI (refractive index) detector. For accurate
5 measurement, it is appropriate to constitute the column as a combination of several commercially available polystyrene gel columns. A preferred example thereof may be a combination of Shodex KF-801, 802, 803, 804, 805, 806, 807 and 800P; or a combination of TSK gel
10 G1000H (H_{XL}), G2000H (H_{XL}), G3000H (H_{XL}), G4000H (H_{XL}), G5000H (H_{XL}), G6000H (H_{XL}), G7000H (H_{XL}) and TSK guardcolumn available from Toso K.K.

The GPC sample may be prepared as follows.

A resinous sample is placed in THF and
15 left standing for several hours (e.g., 5 - 6 hours). Then, the mixture is sufficiently shaken until a lump of the resinous sample disappears and then further left standing for more than 12 hours (e.g., 24 hours) at room temperature. In this instance, a total time of
20 from the mixing of the sample with THF to the completion of the standing in THF is taken for at least 24 hours (e.g., 24 - 30 hours). Thereafter, the mixture is caused to pass through a sample treating filter having a pore size of 0.2 - 0.5 μm (e.g.,
25 "Maishoridisk H-25-5", available from Toso K.K.) to recover the filtrate as a GPC sample. The sample concentration is adjusted to provide a resin

concentration within the range of 0.5 - 5 mg/ml.

The THF-insoluble content of a toner is measured in the following manner.

Ca. 0.5 - 1.0 g of a sample is weighed (at W_1 g), placed in a cylindrical filter (e.g., "No. 86R", available from Toyo Roshi K.K.) and then subjected to extraction with 200 ml of solvent THF in a Soxhlet's extractor for 12 hours. The solvent is evaporated from the extract solution to leave a THF-soluble resin content, which is dried under vacuum at 100 °C for several hours and then weighed (at W_2 g). The weight of components, such as a magnetic material or a pigment, other than the resinous component is determined (at W_3 g). THF-insoluble content ($THF_{ins.}$) is calculated as follows:

$$THF_{ins.} \text{ (wt. \%)} = [W_1 - (W_2 + W_3)] / (W_1 - W_3) \times 100.$$

The toner according to the present invention may be provided with the above-mentioned specific visco-elastic properties, e.g., by appropriately crosslinking the polymer chains of the binder resin. This may be accomplished by combining plural crosslinking reactions providing different crosslinking structures.

Examples of the crosslinking reactions adoptable in the present invention may include: copolymerization using a polyfunctional vinyl monomer having two or more vinyl groups; polycondensation

using monomers, at least one of which is polyfunctional (i.e., three or more functional (e.g., hydroxyl or carboxyl) groups; crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the functional group; reaction between a first polymer having a functional group and a second polymer having a functional group reactive with the functional group of the first polymer; crosslinking by polycondensation of addition polymer(s); and crosslinking by addition polymerization of condensation polymer(s).

Different crosslinking reactions provide different crosslinking structures having differences in various properties, such as degree of crosslinking, thermal decomposition characteristic, distance between crosslinking points, length of crosslinkage, and/or flexibility of crosslinkage (mobility of crosslinking chain). Accordingly, it is preferred to combine a plurality of the above-mentioned crosslinking reactions to provide the toner according to the present invention with the above-mentioned specific visco-elastic properties, i.e., specific elasticity and loss tangent, and maintenance of storage modulus and decrease in loss tangent on temperature increase to a high temperature.

Such plural crosslinking reactions including

first crosslinking and second crosslinking may be performed at the time of either binder resin preparation or toner preparation, or alternatively at the time of binder resin preparation and also
5 subsequent toner preparation. It is also possible that such first and second crosslinkings separately. Preferred method may include: a method comprising the first crosslinking in the binder resin preparation and the second crosslinking in the toner preparation; a
10 method comprising the first crosslinking in the binder resin preparation and the first and the second crosslinkings in the toner preparation; and a method comprising the first and second crosslinkings in the toner preparation. It is particularly preferred to
15 adopt either the method comprising the first crosslinking in the binder resin preparation and the second crosslinking in the toner preparation, or the method comprising the first crosslinking in the binder resin preparation and the first and second
20 crosslinkings in the toner preparation.

In the present invention, it is preferred to produce a toner containing a binder resin having at least two different types of crosslinkages formed by using a resin having a crosslinkage through a first
25 linking and subjecting to the resin to a second crosslinking, in order to provide improved fixability, improved anti-offset property, improved anti-blocking

property, improved releasability from the photosensitive member and prevention of fixing roller soiling.

In order to improve the releasability, separability and anti-curling stability, prevent the traces of separation claw and reduce the fog of fixed images or recording sheets carrying the fixed images, it is particularly preferred to effect a first crosslinking to form a crosslinked resin having a functional group, and then effect a second crosslinking during the toner preparation by melt-kneading the crosslinked resin together with other toner ingredients inclusive of a reactive compound or a reactive polymer reactive with the functional group of the crosslinked resin, a wax and a colorant to form a crosslinkage between the functional groups of the crosslinked resin via the reactive compound or the reactive polymer.

This is because the thus-provided toner containing the resin provided with two types of crosslinkages exhibits the above-mentioned viscosity, elasticity and temperature-dependent changes thereof which are ideally harmonized with thermal behaviors of the toner and the toner image required at the time of fixation in the heat-fixing system.

As a method for preparing the toner having the above-mentioned specific visco-elastic properties

according to the present invention, it is particularly preferred to effect a first crosslinking by reacting a resin having an acid group with a reactive compound or polymer, and then further effect a second crosslinking to provide a crosslinkage via a second reactive compound or polymer.

The first crosslinking may preferably be performed by: copolymerization using a polyfunctional vinyl monomer, polycondensation using monomers, at least one of which is polyfunctional; crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the reactive group; reaction between a first polymer having a functional group and a second polymer having a functional group reactive with the functional group of the first polymer; graft reaction using a polymerization initiator; crosslinking by polycondensation of addition polymer(s); or crosslinking by addition polymerization of condensation polymer(s).

Particularly preferred modes of the first crosslinking may include: crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the reactive group; and reaction between a first polymer having a functional group and a second polymer having a functional group reactive with the

functional group of the first polymer.

Preferred examples of the second crosslinking may include: crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the reactive group; reaction between a first polymer having a functional group and a second polymer having a functional group reactive with the functional group of the first polymer.

It is particularly preferred to effect the second crosslinking by crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the reactive group.

The second crosslinking may preferably be effected during the melt-kneading for toner preparation.

Examples of the functional group contributing to the crosslinking may include: carboxyl, acid anhydride, ester susceptible of trans-esterification, hydroxyl, amino, imino, glycidyl, epoxide, active methylene, double bond, cyano, isocyanate, and vinyl. The crosslinking may be effected by a bonding reaction between these functional groups to form an ester bond, amide bond, imide bond or carbon-to-carbon bond, thereby forming a crosslinkage between polymer chains at the time of binder resin preparation or melt-

kneading for toner preparation to provide the visco-elastic properties characterizing the toner of the present invention. It is also possible to form a cross-linkage between functional groups of polymer chains having such a functional group via a reactive compound, such as acid, alcohol, amine, imine, epoxide, acid anhydride, ketone, aldehyde, amide, ester, lactone, or lactam. This may also be performed during the binder resin preparation or melt-kneading for toner preparation. It is also possible to effect a crosslinking during the melt-kneading for toner preparation by a coordinate bond or ion bond via a metal or metal-containing compound, such as a metal salt, a metal complex or an organo-metallic compound; or an ester bond or amide bond via a nitrogen-containing compound, an epoxy compound, an alcohol compound or a carboxylic acid compound. A particularly preferred form a crosslinking may be performed by using a binder resin, such as a polyester resin or vinyl resin, having an acid group (such as carboxyl or acid anhydride), a hydroxyl group, an amino group, an imino group or a glycidyl group, and forming a crosslinkage via a glycidyl compound, an amine compound, an epoxy compound, a carboxylic acid compound or an alcohol compound, or via a metal or a metal salt, a metal complex or an organometallic compound. It is particularly preferred to include

plural forms of such crosslinkages.

It is particularly preferred to prepare a toner having the above-described visco-elastic properties and molecular weight distribution by
5 subjecting a resin having an acid group to a crosslinking via a reactive compound, such as a glycidyl compound, and further to a crosslinking via a metal of a metal-containing compound or a second reactive compound.

10 A crosslinkage via a glycidyl compound may be introduced into a binder resin, e.g., by mixing in solution a copolymer of a glycidyl group-containing vinyl monomer and a styrene monomer with a copolymer of a vinyl monomer containing an acid group such as
15 carboxyl or acid anhydride and a styrene monomer. The above-mentioned desirable visco-elastic properties of the toner may be provided by using such a binder resin, if desired, with further crosslinking with
20 other toner ingredients in the melt-kneading step for toner preparation. Such a glycidyl group-containing copolymer may preferably have a weight-average molecular weight (M_w) of $4 \times 10^3 - 1 \times 10^5$, more preferably $5 \times 10^3 - 5 \times 10^4$, based on molecular weight distribution according to GPC.

25 Examples of glycidyl group-containing vinyl monomer may include: glycidyl acrylate, glycidyl methacrylate, β -methylglycidyl acrylate, β -

methylglycidyl methacrylate, allyl glycidyl ether, and allyl β -methylglycidyl ether.

Such a glycidyl compound may preferably be used in an amount of 0.05 - 10 equivalents, preferably
5 0.1 - 5 equivalents, per mol of a functional group, such as acid group.

The metal-containing compound for providing a crosslinkage may be a metal salt or a metal complex. Examples of metal ions contained therein may include:
10 mono-valent metal ions, such as Na^+ , Li^+ , K^+ , Cs^+ , Ag^+ , Hg^+ , and Cu^+ ; divalent metal ions, such as Be^{2+} , Ba^{2+} , Mg^{2+} , Ca^{2+} , Hg^{2+} , Sn^{2+} , Pb^{2+} , Mn^{2+} , Fe^{2+} , Ce^{2+} , Ni^{2+} , and Zn^{2+} ; tri-valent ions, such as Al^{3+} , Sc^{3+} , Fe^{3+} , V^{3+} , Co^{3+} , Ni^{3+} , Cr^{3+} and Y^{3+} ; and tetra-valent
15 ions, such as Ti^{4+} and Zr^{4+} .

Among such metal-containing compounds, organometallic compounds are preferred because of good mutual solubility or dispersibility within a polymer so that the crosslinking therewith is allowed to
20 uniformly proceed in the polymer, thereby providing better results.

Among such organometallic compounds, those containing an organic compound rich in volatility or sublimability as a ligand or a counter ion may be
25 advantageously used. Examples of such organic compounds may include: salicylic acid and derivatives thereof, such as salicylic acid, salicylamide,


salicylamine, salicylaldehyde, salicylosalicylic acid,
and di-tert-butylsalicylic acid; diketones, such as
acetylacetone and propionacetone; low-molecular weight
carboxylic acid salts, such as acetic acid salt and
5 propionic acid salt; hydroxycarboxylic acids; and
dicarboxylic acids.

Other preferable ligands may include: azo
compound derivatives, heterocyclic compounds such as
imidazole derivatives and aromatic compounds in view
10 of mutual solubility with the binder resin and
influence on the developing performance.

The metal-containing compound may preferably
be contained in 0.01 - 20 wt. parts, more preferably
0.1 - 10 wt. parts, per 100 wt. parts of the binder
15 resin. Below 0.01 wt. part, the contribution thereof
to the crosslinking may not be significant, and in
excess of 20 wt. parts, the chargeability of the
resultant toner is liable to be unstable, thus being
liable to fail in stable developing performance in
20 continuous image formation.

The reactive compound other than the metal
containing compound and usable for providing a
crosslinkage may preferably be a compound having at
least two functional groups which may be identical or
25 different and selected from hydroxyl groups, epoxide
groups and amide groups (in a sense of including imino
group), preferably be such an aromatic compound or a

nitrogen-containing heterocyclic compound in a sense of including a compound including plural aromatic rings or heterocyclic rings having such a functional group bonded with an arbitrary bonding group. Taking
5 amino group for example, examples of such compounds may include: aliphatic, alicyclic and aromatic amines; aliphatic aromatic amines; polynuclei amines, inclusive of ether-type amines, hydrocarbon-type amines and fluoreneamine; imide-type amines; alkyl
10 ester-type amines; and amines represented by the following formula (1):



wherein, X represents a direct bond or an arbitrary
15 bonding group; and Y denotes an arbitrary optional substituent, preferably alkyl, fluoroalkyl or thioalkyl.

Incidentally, other reactive compounds may include those indicated by replacing both (or either
20 one) of the amino groups (NH_2) in the formula (1) with hydroxyl, epoxide or carboxyl group.

The crosslinking via such a reactive compound may be effected, e.g., by melt-kneading a polymer having a functional group in the presence of a
25 reactive compound under a high shearing force, or by melt-kneading a polymer including a crosslinked polymer component in the presence of a reactive

compound. As a result, the resultant toner is provided with various structures of crosslinkages providing the prescribed visco-elastic properties and molecular weight distribution.

5 In addition to the above, it is also possible to use a crosslinking monomer for effecting a crosslinking during polymerization for providing a binder resin. Such a crosslinking monomer may principally be a vinyl monomer having at least two
10 polymerizable double bonds and it may be preferable to use two or more species of such a crosslinking monomer in combination in some cases.

 Specific examples of such a crosslinking monomer may include: aromatic divinyl compounds, such
15 as divinylbenzene and divinyl naphthalene; diacrylate compounds connected with an alkyl chain, such as ethylene glycol diacrylate, 1,3-butylene glycol diacrylate, 1,4-butanediol diacrylate, 1,5-pentanediol diacrylate, 1,6-hexanediol diacrylate, and neopentyl
20 glycol diacrylate, and compounds obtained by substituting methacrylate groups for the acrylate groups in the above compounds; diacrylate compounds connected with an alkyl chain including an ether bond, such as diethylene glycol diacrylate, triethylene
25 glycol diacrylate, tetraethylene glycol diacrylate, polyethylene glycol #400 diacrylate, polyethylene glycol #600 diacrylate, dipropylene glycol diacrylate

and compounds obtained by substituting methacrylate groups for the acrylate groups in the above compounds; diacrylate compounds connected with a chain including an aromatic group and an ether bond, such as

5 polyoxyethylene(2)-2,2-bis(4-hydroxyphenyl)propanedi-acrylate, polyoxyethylene(4)-2,2-bis(4-hydroxyphenyl)-propanediacylate, and compounds obtained by substituting methacrylate groups for the acrylate groups in the above compounds; and polyester-type

10 diacrylate compounds, such as one known by a trade name of MANDA (available from Nihon Kayaku K.K.). Polyfunctional crosslinking agents, such as pentaerythritol triacrylate, trimethylolethane triacrylate, trimethylolpropane triacrylate,

15 tetramethylpropane triacrylate, tetramethylolmethane tetracrylate, oligoester acrylate, and compounds obtained by substituting methacrylate groups for the acrylate groups in the above compounds; triallyl cyanurate and triallyl trimellitate.


20 As a component for effecting the crosslinking during the polycondensation, it is possible to include a polyhydric alcohol or/and a polybasic acid each having three or more functional groups also functioning as a crosslinking component in combination

25 with the above mentioned alcohol and acid.

Examples of such polyhydric alcohols may include: sorbitol, 1,2,3,6-hexanetetrol, 1,4-

sorbitane, pentaerythritol, dipentaerythritol,
tripentaerythritol, 1,2,4-butanetriol, 1,2,5-
pentanetriol, glycerol, 2-methylpropanetriol, 2-
methyl-1,2,4-butanetriol, trimethylolethane,
5 trimethylolpropane, and 1,3,5-trihydroxybenzene.

Examples of polybasic carboxylic acids may
include: trimellitic acid, pyromellitic acid, 1,2,4-
benzentricarboxylic acid, 1,2,5-benzentricarboxylic
acid, 2,5,7-naphthalenetetracarboxylic acid, 1,2,4-
10 naphthalenetetracarboxylic acid, 1,2,4-butanetri-
carboxylic acid, 1,2,5-hexanetricarboxylic acid,
1,2,5-hexanetricarboxylic acid, 1,3-dicarboxyl-2-
methyl-2-methylenecarboxypropane, tetra(methylene-
carboxyl)methane, 1,2,7,8-octanetetracarboxylic acid,
15 empole trimer acid, and their anhydrides and lower
alkyl esters; and also tetracarboxylic acids
represented by the following formula (C):



20 (wherein X is an alkylene or alkenylene group having 1
- 30 carbon atoms and capable of having one or more
side chains of one or more carbon atoms) and anhydride
and lower alkyl esters thereof.

Examples of the initiator used for graft
25 crosslinking may include: t-butylperoxy-2-
ethylhexanoate, cumyl perpivalate, t-butyl
peroxylaurate, benzoyl peroxide, lauroyl peroxide,

octanoyl peroxide, di-t-butyl peroxide, t-butylcumul
peroxide, dicumul peroxide, 2,2'-azobisisobutylo-
nitrile, 2,2'-azobis(2-methylbutyro-nitrile, 2,2'-
azobis(2,4-dimethylvaleronitrile), 2,2'-azobis(4-
5 methoxy-2,4-dimethylvaleronitrile), 1,1-bis(t-
butylperoxy)-3,3,5-trimethylcyclohexane, 1,1-bis(t-
butylperoxy)cyclohexane, 1,4-bis(t-butylperoxy-
carbonyl)cyclohexane, 2,2-bis(t-butylperoxy)octane, n-
butyl-4,4-bis(t-butylperoxy)valerate, 2,2-bis(t-
10 butylperoxy)butane, 1,3-bis(t-butylperoxyisopropyl)-
benzene, 2,5-dimethyl-2,5-di(t-butylperoxy)hexane,
2,5-dimethyl-2,5-di(benzoylperoxy)hexane, di-t-
butyldiperoxyisophthalate, 2,2-bis(4,4-di-t-butyl-
peroxycyclohexyl)propane, di-t-butylperoxy- α -
15 methylsuccinate, di-t-butylperoxydimethylglutarate,
di-t-butylperoxyhexahydroterephthalate, di-t-
butylperoxyazelate, 2,5-dimethyl-2,5-di-(t-
butylperoxy)hexane, diethylene glycol-bis(t-
butylperoxycarbonate), di-t-butylperoxytrimethyl-
20 azipate, tris(t-butylperoxy)triazine, and vinyl-
tris(t-butylperoxy)silane. These initiators may be
used singly or in combination in an amount of at least
0.05 wt. part, preferably 0.1 - 15 wt. parts, per 100
wt. parts of the monomer.

25 The polyester resin used in the present
invention may be constituted as follows.

Examples of the resin having a functional

group may include: vinyl polymers, polyester resin,
epoxy resin, polyamide resin, polyurethane resin,
silicone resin, phenolic resin, polyvinyl butyral
resin, rosin, modified rosin, terpene resin, aliphatic
5 or alicyclic hydrocarbon resin, aromatic petroleum
resin, natural resin-modified maleic acid resin, and
furan resin. These resins may be used singly or in
mixture. A part or all of such resins constituting
the binder resin may be provided with a functional
10 group. Vinyl polymers and polyester resins are
particularly preferred.

For example, a vinyl polymer-type binder
resin may be provided with an acid group by using a
carboxylic acid monomer or a carboxylic acid
15 derivative monomer, examples of which may include:
maleic acid, citraconic acid, dimethylmaleic acid,
itaconic acid, alkenylsuccinic acid and anhydrides of
these; unsaturated dibasic acids, such as fumaric
acid, mesaconic acid and dimethylfumaric acid, and
20 monoesters of such unsaturated dibasic acids; acrylic
acid, methacrylic acid, crotonic acid, cinnamic acid
and anhydrides of these; α,β -unsaturated acids
described above, and anhydrides with lower aliphatic
acids, and anhydrides of such α,β -unsaturated acids
25 alkenylmalonic acid, alkenylglutaric acid,
alkenyladipic acid, and anhydride and monoesters of
these.

Among the above, it is particularly preferred to use a monoester of α,β -unsaturated dibasic, such as maleic acid, fumaric acid or succinic acid, acrylic acid or methacrylic acid as a monomer for providing an acid group to the binder resin used in the present invention. Preferred examples of such monoesters may include: monomethyl maleate, monoethyl maleate, monobutyl maleate, monooctyl maleate, monoallyl maleate, monophenyl maleate, monomethyl fumarate, monoethyl fumarate, monobutyl fumarate, monophenyl fumarate, monobutyl n-butenylsuccinate, monomethyl n-octenylsuccinate, monoethyl n-butenylmalonate, monomethyl n-dodecenylglutarate, and monobutyl n-butenyladipate.

Examples of vinyl monomers as comonomers for providing vinyl polymers having an acid group together with a carboxylic acid (derivative) monomer as described above may include: styrene; styrene derivatives, such as o-methylstyrene, m-methylstyrene, p-methylstyrene, p-methoxystyrene, p-phenylstyrene, p-chlorostyrene, 3,4-dichlorostyrene, p-ethylstyrene, 2,4-dimethylstyrene, p-n-butylstyrene, p-tert-butylstyrene, p-n-hexylstyrene, p-n-octylstyrene, p-n-nonylstyrene, p-n-decylstyrene, and p-n-dodecylstyrene; ethylenically unsaturated monoolefins, such as ethylene, propylene, butylene, and isobutylene; unsaturated polyenes, such as butadiene;

halogenated vinyls, such as vinyl chloride, vinylidene chloride, vinyl bromide, and vinyl fluoride; vinyl esters, such as vinyl acetate, vinyl propionate, and vinyl benzoate; methacrylate, such as methyl
5 methacrylate, ethyl methacrylate, propyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, n-octyl methacrylate, dodecyl methacrylate, 2-ethylhexyl methacrylate, stearyl methacrylate, phenyl methacrylate, dimethylaminoethyl methacrylate, and
10 diethylaminoethyl methacrylate; acrylates, such as methyl acrylate, ethyl acrylate, n-butyl acrylate, isobutyl acrylate, propyl acrylate, n-octyl acrylate, dodecyl acrylate, 2-ethylhexyl acrylate, stearyl acrylate, 2-chloroethyl acrylate, and phenyl acrylate,
15 vinyl ethers, such as vinyl methyl ether, vinyl ethyl ether, and vinyl isobutyl ether; vinyl ketones, such as vinyl methyl ketone, vinyl hexyl ketone, and methyl isopropenyl ketone; N-vinyl compounds, such as N-vinylpyrrole, N-vinylcarbazole, N-vinylindole, and N-
20 vinyl pyrrolidone; vinyl naphthalenes; acrylic acid derivatives or methacrylic acid derivatives, such as acrylonitrile, methacrylonitrile, and acrylamide.
These vinyl monomers may be used singly or in combination of two or more species.

25 Among these, a combination of monomers providing styrene-based copolymers and styrene-acrylate-based copolymers may be particularly

preferred.

It is also possible to use a crosslinking vinyl monomer having two or more polymerizable double bonds as a portion of comonomers for providing vinyl
5 polymers having an acid group together with a carboxylic acid (derivative) monomer as described above. Such a crosslinking vinyl monomer may be selected from the above-mentioned list of crosslinking monomers.

10 Such a crosslinking vinyl monomer may preferably be used in a proportion of ca. 0.01 - 5.0 wt. parts, more preferably 0.03 - 3.0 wt. parts, per 100 wt. parts of the other monomers. Below 0.01 wt. part, a substantial contribution thereof to the
15 crosslinking thereby cannot be expected. Above 5.0 wt. parts, excessive crosslinkage may be incorporated, thus being liable to invite deterioration of fixability and dispersibility of other toner ingredients in the binder resin.

20 As described above, the above-mentioned specific visco-elastic properties may be provided to the toner according to the present invention by appropriately combining the selection and/or control of the binder resin composition, the types of the
25 first and second crosslinking reactions, the points of time for effecting the first and second crosslinking reactions, and the conditions of the first and second

crosslinking reactions. However, for the purpose of commercial production of toners, it is desired to produce a high-performance toner at a high productivity.

5 In view of this, the toner according to the present invention may particularly preferably be formed through a two-stage crosslinking process wherein the first crosslinking reaction is effected at least in the step producing a binder resin and the
10 second crosslinking reaction is effected in the step of melt-kneading the binder resin with other toner ingredients for toner production. It is further preferred that the first crosslinking reaction is effected in the binder resin production step and also
15 successively in the melt-kneading step.

 The two-stage crosslinking process allows the production of the toner according to the present invention having the specific visco-elastic properties by combining a plurality of crosslinking reactions
20 having mutually different reaction speeds while controlling the crosslinking states formed by the respective crosslinking reactions. Particularly, as the second crosslinking reaction is effected in the melt-kneading step for toner production, the
25 temperature and shearing force applied to the toner composition can be strictly controlled by kneading conditions of the kneading machine to adjustively

provide desired visco-elastic properties within the specified range of the present invention.

The kneading conditions of the kneading machine can be appropriately selected so as to provide
5 desired properties depending on the composition to be kneaded, i.e., the binder resin, wax, crosslinking agent and other ingredients.

Depending on the types of crosslinking reactions and binder resin, it is also possible to
10 adopt a one-stage crosslinking process wherein the first and second crosslinking reactions are both effected in the melt-kneading step for toner production, instead of the two-stage crosslinking process.

15 As for the most preferred combination of the crosslinking reactions, the first crosslinking reaction comprises a relatively slow reaction between a polymer having a carboxyl group and a compound (or polymer) having a glycidyl group or hydroxyl group,
20 i.e., a reaction between the carboxyl group and the glycidyl or hydroxyl group, and the second crosslinking reaction comprises a relatively fast reaction between a polymer having a carboxyl group and a glycidyl or hydroxyl group formed after the
25 crosslinking reaction, and a metal-containing or a nitrogen-containing compound having an amino or imino group, including a reaction between the carboxyl group

and the metal atom, metal ion, or amino or imino group.

It is difficult to sufficiently cause the relatively slow first crosslinking reaction in the melt-kneading step in a controlled manner. On the other hand, the relatively fast second crosslinking reaction is liable to proceed excessively when performed in the binder production step. As a result, in both cases, it is difficult to form a toner having the visco-elastic properties prescribed in the present invention.

Accordingly, in the above-mentioned combination of the first crosslinking reaction between a carboxyl group-containing polymer and a glycidyl group or hydroxyl group-containing compound (or polymer), and the second crosslinking reaction between a polymer having a carboxyl group and a glycidyl or hydroxyl group formed by the first crosslinking reaction and a metal-containing compound or a nitrogen (i.e., amino or imino group)-containing compound, the two-stage crosslinking process capable of easily controlling the respective crosslinking reactions is preferred than the one-stage crosslinking process.

By optionally controlling different crosslinking reactions for providing specific forms of crosslinkages of resins through such a two-stage crosslinking process, the resultant toner can be

provided with the specific visco-elastic properties in a controlled manner while achieving the good dispersion state of toner ingredients, whereby a toner exhibiting excellent performances can be produced stably and at a high productivity.


The vinyl polymer-type binder resin used in the present invention may be prepared by solution polymerization, bulk polymerization, suspension polymerization or emulsion polymerization in the presence of a polymerization initiator.

Such a polymerization initiator may be appropriately selected from the above-mentioned list of initiators used for graft crosslinking. In the polymerization for providing the binder resin, such a polymerization initiator may preferably be used in a proportion of at least 0.05 wt. part, more preferably 0.1 - 15 wt. parts, per 100 wt. parts of the monomer(s) constituting the binder resin.


It is also preferred to use a polyester resin as the binder resin. A preferred composition of such a polyester resin is described below.

Examples of a dihydric alcohol component may include: diols, such as ethylene glycol, propylene glycol, 1,3-butanediol, 1,4-butanediol, 2,3-butanediol, diethylene glycol, triethylene glycol, 1,5-pentanediol, 1,6-hexanediol, neopentyl glycol, 2-ethyl-1,3-hexanediol, hydrogenated bisphenol A,

bisphenols and derivatives represented by the following formula (A):

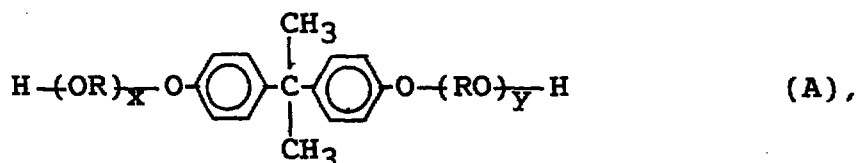

wherein R denotes an ethylene or propylene group, x and y are independently 0 or a positive integer with the proviso that the average of x+y is in the range of 0 - 10; diols represented by the following formula (B):



wherein R' denotes $-\text{CH}_2\text{CH}_2-$, $-\text{CH}_2-\overset{\text{CH}_3}{\underset{|}{\text{CH}}}-$ or $-\text{CH}_2-\overset{\text{CH}_3}{\underset{\text{CH}_3}{\text{C}}}-$,

x' and y' are independently 0 or a positive integer with the proviso that the average of x'+y' is in the range of 0 - 10.


A dibasic acid component may be a dibasic acid or derivative thereof, examples of which may include benzenedicarboxylic acids, such as phthalic acid, terephthalic acid and isophthalic acid, and their anhydrides and lower alkyl esters; alkyldicarboxylic acids, such as succinic acid, adipic acid, sebacic acid and azelaic acid, and their anhydrides and lower alkyl esters; alkyl or alkenyl-substituted succinic acids, and their anhydrides and lower alkyl esters; and unsaturated dicarboxylic

acids, such as fumaric acid, maleic acid, citraconic acid and itaconic acid, and their anhydrides, and derivatives of these.

It is preferred to use a polyhydric alcohol
5 or/and a polybasic acid each having three or more functional groups also functioning as a crosslinking component in combination with the above mentioned alcohol and acid.

Examples of such polyhydric alcohols may
10 include: sorbitol, 1,2,3,6-hexanetetrol, 1,4-sorbitane, pentaerythritol, dipentaerythritol, tripentaerythritol, 1,2,4-butanetriol, 1,2,5-pentanetriol, glycerol, 2-methylpropanetriol, 2-methyl-1,2,4-butanetriol, trimethylolethane,
15 trimethylolpropane, and 1,3,5-trihydroxybenzene.

Examples of polybasic carboxylic acids may include: trimellitic acid, pyromellitic acid, 1,2,4-benzentricarboxylic acid, 1,2,5-benzentricarboxylic acid, 2,5,7-naphthalenetricarboxylic acid, 1,2,4-naphthalenetricarboxylic acid, 1,2,4-butanetricarboxylic acid, 1,2,5-hexanetricarboxylic acid, 1,2,5-hexanetricarboxylic acid, 1,3-dicarboxyl-2-methyl-2-methylenecarboxypropane, tetra(methylene-carboxyl)methane, 1,2,7,8-octanetetracarboxylic acid,
20 empole trimer acid, and their anhydrides and lower alkyl esters; and also tetracarboxylic acids represented by the following formula (C):



(wherein X is an alkylene or alkenylene group having 1
- 30 carbon atoms and capable of having one or more
5 side chains of one or more carbon atoms) and anhydride
and lower alkyl esters thereof.

The polyester may desirably comprise 40 - 60
mol.%, preferably 45 - 55 mol. % of alcohol component
and 60 - 40 mol. %, preferably 55 - 45 mol. % of acid
10 component. The polyfunctional component may be used
in a proportion of 5 - 60 mol. % of the total
components.

Examples of the wax used in the present
invention may include: paraffin wax and its
15 derivatives, montan wax and its derivatives,
microcrystalline wax and its derivatives, Fischer-
Tropsche wax and its derivatives, polyolefin wax and
its derivatives, and carnauba wax and its derivatives.
The derivatives include oxides, block copolymers with
20 vinyl monomers and graft-modified products.

In addition to the above, it is also possible
to use alcohol, aliphatic acid, ester, ketone,
hardened castor oil and its derivative, vegetable wax,
animal wax, mineral wax or petrolactam.

25 Preferred examples of waxes used in the
present invention may include: paraffin waxes; low-
molecular weight polyolefin formed by polymerization

of olefin by radical polymerization or in the presence of a Ziegler catalyst, and by-products in such polymerization; low-molecular weight polyolefin formed by thermal decomposition of high-molecular weight polyolefin; distillation residue from hydrocarbons synthesized from a gaseous mixture of carbon monoxide and hydrogen in the presence of a catalyst, or waxes obtained from hydrocarbons formed by hydrogenating such distillation residues; esters; montan derivatives; and aliphatic acids purified by removal of impurities. It is possible to add an anti-oxidant to those waxes.

A particularly preferred class of waxes may include: paraffin waxes, products obtained by polymerizing olefins, such as ethylene, in the presence of a Ziegler catalyst and by-products from the polymerization; waxes based on hydrocarbons having up to several thousands carbon atoms, preferably up to 1000 carbon atoms, such as Fischer-Trapshe wax.

It is also preferred to use a wax product having a narrower molecular weight distribution by fractionating the above-mentioned waxes according to press sweating, solvent method, vacuum distillation, super critical gas extraction or fractional crystallization (such as melt-crystallization or crystal filtration). It is also possible to subject such a wax product after fractionation to oxidation,

block copolymerization or graft-modification. For example, the fractionation may be applied for removal of a low-molecular weight component or extraction of a low-molecular weight component, optionally followed by
5 removal of a low-molecular weight component, so as to provide an arbitrary molecular weight distribution.

The wax used in the present invention may preferably have such a molecular weight distribution as to provide a number-average molecular weight (M_n)
10 of 200 - 1200, more preferably 250 - 1000, a weight-average molecular weight (M_w) of 300 - 3600, more preferably 350 - 3000, and an M_w/M_n ratio of at most 3, more preferably at most 2.5, particularly preferably at most 2.0.

15 If the wax has an M_n of below 200 or an M_w of below 300, it becomes difficult to obtain a sufficient improvement in anti-offset property. In case of M_n exceeding 1200 or M_w exceeding 3600, it becomes difficult to obtain a sufficient improvement in
20 fixability. In case of M_w/M_n exceeding 3, it becomes difficult to achieve the improvement in fixability and anti-offset property in combination as well as the maintenance of storage stability.

The molecular weight (distribution) of a
25 wax may be measured by GPC under the following conditions:

Apparatus: "GPC-150C" (available from Waters Co.)

Column: "GMH-HT" 30 cm-binary (available from
Toso K.K.)

Temperature: 135 °C

Solvent: o-dichlorobenzene containing 0.1 % of
5 ionol.

Flow rate: 1.0 ml/min.

Sample: 0.4 ml of a 0.15 %-sample.

Based on the above GPC measurement, the
molecular weight distribution of a sample is obtained
10 once based on a calibration curve prepared by
monodisperse polystyrene standard samples, and re-
calculated into a distribution corresponding to that
of polyethylene using a conversion formula based on
the Mark-Houwink viscosity formula.

15 A GPC sample may be prepared in the following
manner.

A wax sample is placed in o-dichlorobenzene
in a beaker heated on a heater set at 150 °C to
dissolve the sample. After the sample is dissolved,
20 the sample solution is placed in a filter unit and set
in the GPC apparatus so that a GPC sample at a
concentration of 0.15 wt. % having passed through the
filter unit is supplied for the GPC measurement.

The wax used in the present invention may
25 preferably have a melting point of 70 - 155 °C and a
melt-viscosity at 160 °C of at most 500 mPa.s, more
preferably a melting point of 75 - 140 °C and a melt-

viscosity at 140 °C of at most 500 mPa.s, particularly preferably a melting point of 75 - 125 °C and a melt-viscosity at 120 °C of at most 500 mPa.s.

If the melting point of the wax is below 70
5 °C, the anti-blocking property of the resultant toner is liable to be inferior. In excess of 155 °C, it becomes difficult to achieve the improvements in fixability and anti-low-temperature offset property. If the wax has a melt-viscosity at 160 °C in excess of
10 500 mPa.s, it becomes difficult to achieve the improvement in toner releasability.

The melting point of a wax referred to herein is based on values measured by using a differential scanning calorimeter ("DSC-7", available from Perkin-
15 Elmer Corp.) according to ASTM D3418-82 in the following manner.

A sample in a weight of 2 - 10 mg, preferably ca. 5 mg, is accurately weighed, placed in an aluminum pan and then subjected to a DSC measurement at a
20 temperature-raising rate of 10 °C/min. in a temperature range of 30 - 200 °C while using a blank aluminum pan as a reference.

During the temperature increase, a heat-absorption main peak is observed on a DSC curve in the
25 temperature range of 30 - 200 °C. The peaktop temperature of the heat-absorption main peak is taken as a melting point referred to herein.

The melt-viscosity of a wax referred to herein is based on values measured by using a rotary viscometer ("VT-500", available from Haake Co.) with respect to a sample held in container placed on a
5 temperature-regulated oil both adjusted at a prescribed temperature (e.g., 160 °C) for measurement under a shear rate of 6000 s⁻¹ while using a sensor of PK1, 0.5 deg.

In the present invention, the wax may
10 preferably be used in 0.1 - 15 wt. parts, more preferably 0.5 - 12 wt. parts, per 100 wt. parts of the binder resin. It is possible to use a plurality of waxes in combination so as to provide a total amount, as mentioned above.

15 The toner according to the present invention can contain a colorant comprising any suitable pigment or dye. For example, suitable examples of the pigment may include: carbon black, aniline black, Naphthol Yellow, Hansa Yellow, Rhodamine Lake, Alizarin Lake,
20 red iron oxide, Phthalocyanine Blue, and Indanthrene Blue. Such a pigment may be used in an amount necessary to provide a required optical density of fixed image, e.g., 0.1 - 20 wt. parts, preferably 0.2 - 10 wt. parts, per 100 wt. parts of the binder resin.
25 For similar purpose, a dye may be used. There are, for example, azo dyes, anthraquinone dyes, xanthene dyes and methin dyes, which may be added in 0.1 - 20

wt. parts, preferably 0.3 - 10 wt. parts, per 100 wt. parts of the binder resin.

The toner according to the present invention can also be formed as a magnetic toner by containing a powdery magnetic material which can also function as a colorant. Examples of such a powdery magnetic material may include: iron oxide, such as magnetite, hematite and ferrite; metals, such as iron, cobalt and nickel, and alloys of these metals with another element, such as aluminum, copper, lead, magnesium, tin, zinc, antimony, beryllium, bismuth, cadmium, calcium, manganese, selenium, titanium, tungsten and vanadium, and mixtures of these.

The magnetic material may preferably have a number-average particle size of at most 2 μm , more preferably 0.1 - 0.5 μm . In excess of 2 μm , it becomes difficult to exhibit a sufficient coloring power. The number-average particle size of a magnetic material may for example be determined by measuring longer-axis diameters of 100 particles selected at random on photographs taken at a magnification of 2×10^4 - 5×10^4 through a transmission microscope and taking an average of the measured long-axis diameters by using a digitizer, etc.

Such a magnetic material may preferably be contained in 20 - 200 wt. parts, more preferably 40 - 150 wt. parts, per 100 wt. parts of the binder resin

in the toner.

If the content of the magnetic material is below 20 wt. parts, it is difficult to attain a sufficient coloring power, and in excess of 200 wt. parts, the fixability is liable to be impaired.

The magnetic material may preferably have magnetic particles as measured by application of 7.96×10^2 kA/m including a coercive force (H_c) of 1.6 - 23.9 kA/m, a saturation magnetization (σ_s) of 50 - 200 Am²/kg, and a residual magnetization (σ_r) of 2 - 20 Am²/kg.

By satisfying the above-mentioned magnetic properties, the magnetic material may provide a magnetic toner capable of providing fog-free images having a high image density and excellent in resolution and gradation characteristic.

The toner according to the present invention may preferably further contain a positive or negative charge control agent.

Examples of the positive charge control agents may include: nigrosine and modified products thereof with aliphatic acid metal salts, etc., onium salts inclusive of quaternary ammonium salts, such as tributylbenzylammonium 1-hydroxy-4-naphtholsulfonate and tetrabutylammonium tetrafluoroborate, and their homologous inclusive of phosphonium salts, and lake pigments thereof; triphenylmethane dyes and lake

pigments thereof (the laking agents including, e.g., phosphotungstic acid, phosphomolybdic acid, phosphotungsticmolybdic acid, tannic acid, lauric acid, gallic acid, ferricyanates, and ferrocyanates);
5 higher aliphatic acid metal salts; diorganotin oxides, such as dibutyltin oxide, dioctyltin oxide and dicyclohexyltin oxide; and diorganotin borates, such as dibutyltin borate, dioctyltin borate and dicyclohexyltin borate. These may be used singly or
10 in mixture of two or more species. Among these, it is preferred to use a triphenylmethane lake pigment.

Examples of the negative charge control agent may include: organic metal complexes, chelate compounds, monoazo metal complexes, acetylacetone
15 metal complexes, organometal complexes of aromatic hydroxycarboxylic acids and aromatic dicarboxylic acids, metal salts of aromatic hydroxycarboxylic acids, metal salts of aromatic poly-carboxylic acids, and anhydrides and esters of such acids, and phenol
20 derivatives, such as bisphenols.

The toner according to the present invention may preferably have a weight-average particle size (D4) of 4 - 10 μm , more preferably 5 - 9 μm .

If the weight-average particle size of the
25 toner exceeds 10 μm , the toner coverage on the resultant toner image is liable to be excessive, thus resulting in inferior thin-line reproducibility, and

result in traces of separation claw. Below 4 μm , the toner coverage is liable to be insufficient, thus resulting in a decrease in image density especially in a large area image, and result in the winding of the recording sheet about the fixing member.

The weight-average particle size and particle size distribution of a toner may be measured according to the Coulter counter method, e.g., by using Coulter Counter Model TA-II or Coulter Multisizer II (available from Coulter Electronics Inc.) together with an electrolytic solution comprising a ca. 1 % NaCl aqueous solution which may be prepared by dissolving a reagent-grade sodium chloride or commercially available as "ISOTON-II" (from Counter Scientific Japan). For measurement, into 100 to 150 ml of the electrolytic solution, 0.1 to 5 ml of a surfactant (preferably an alkyl benzenesulfonic acid salt) is added as a dispersant, and 2 - 20 mg of a sample is added. The resultant dispersion of the sample in the electrolytic solution is subjected to a dispersion treatment by an ultrasonic disperser for ca. 1 - 3 min., and then subjected to measurement of particle size distribution by using the above-mentioned apparatus equipped with a 100 μm -aperture. The volume and number of toner particles having particle sizes of 2.00 μm or larger are measured for respective channels to calculate a volume-basis

distribution and a number-basis distribution of the toner. From the volume-basis distribution, a weight-average particle size (D_4) of the toner is calculated by using a central value as a representative for each channel.

The channels used include 13 channels of 2.00 - 2.52 μm ; 2.52 - 3.17 μm ; 3.17 - 4.00 μm ; 4.00 - 5.04 μm ; 5.04 - 6.35 μm ; 6.35 - 8.00 μm ; 8.00 - 10.08 μm , 10.08 - 12.70 μm ; 12.70 - 16.00 μm ; 16.00 - 20.20 μm ; 20.20 - 25.40 μm ; 25.40 - 32.00 μm ; and 32.00 - 40.30 μm .

It is preferred to use the toner according to the present invention together with silica fine powder externally blended therewith in order to improve the charge stability, developing characteristic fluidity, and durability.

The silica fine powder may preferably have a specific surface area of 30 m^2/g or larger, preferably 50 - 400 m^2/g , as measured by nitrogen adsorption according to the BET method. The silica fine powder may be added in a proportion of 0.01 - 8 wt. parts, preferably 0.1 - 5 wt. parts, per 100 wt. parts of the toner.

For the purpose of being provided with hydrophobicity and/or controlled chargeability, the silica fine powder may well have been treated with a treating agent, such as silicone varnish, modified

silicone varnish, silicone oil, modified silicone oil,
silane coupling agent, silane coupling agent having
functional group or other organic silicon compounds.
It is also possible to use two or more treating agents
5 in combination.

The toner according to the present invention
can further contain other additives, inclusive of:
powdery lubricants, such as polytetrafluoroethylene
powder, zinc stearate powder and polyvinylidene
10 fluoride powder, with polyvinylidene fluoride powder
as a particularly preferred one; powdery abrasives,
such as cerium oxide powder, silicon carbide powder
and strontium titanate powder, with strontium titanate
powder as a particularly preferred one; flowability-
15 improving agents, such as titanium oxide powder and
aluminum oxide powder, which are preferably
hydrophobized; anti-caking agent; electroconductivity-
imparting agents, such as carbon black powder, zinc
oxide powder, antimony oxide powder and tin oxide
20 powder; and developing performance-improver agents,
such as white fine particles and black fine particles
of opposite polarity, respectively in relatively small
amounts.

The toner according to the present invention
25 may be used for providing a mono-component type
developer or a two-component type developer. In the
case of providing a two-component type developer, the

toner may be blended with carrier powder in a ratio suitable for providing a toner concentration of 0.1 - 50 wt. %, preferably 0.5 - 10 wt. %, further preferably 3 - 10 wt. %.

5 The carrier used for this purpose may be known ones, inclusive of powdery magnetic materials, such as iron powder, ferrite powder and nickel powder; glass beads; and resin coated materials formed by coating such carrier materials with a resin, such as
10 fluorine-containing resin, vinyl resin or silicone resin.

 The toner according to the present invention may be prepared through a process including:
sufficiently blending the binder resin, the wax, a
15 colorant, such as pigment, dye and/or a magnetic material, a metal-containing compound, and an optional charge control agent and other additives, as desired, by means of a blender such as a Henschel mixer or a ball mill, melting and kneading the blend by means of
20 hot kneading means, such as hot rollers, a kneader or an extruder to cause melt-kneading of the resinous materials and disperse or dissolve the wax, pigment or dye therein, and cooling and solidifying the kneaded product, followed by pulverization and classification.

25 The thus obtained toner may be further blended with other external additives, as desired, sufficiently by means of a mixer such as a Henschel

mixer to provide a toner for developing electrostatic images.

In the present invention, it is particularly significant as mentioned above to use a binder resin
5 having a functional group and a reactive compound and subject these materials to crosslinking during the melt-kneading step for toner production. For effectively causing the crosslinking, it is important to appropriately set the heating temperature and the
10 paddle or screw organization of the kneading machine so as to provide a high resin temperature during the kneading and a long residence time of the resin in the kneading machine.

More specifically, it is preferred to form a
15 kneading section by combining a reverse feed paddle, a forward feed paddle and a residential or non-feed paddle and provide the resin under kneading with an elevated temperature due to its self-heat generation by setting the kneading machine temperature at a low
20 level and kneading the resin under application of a high shearing force.

In order to simply raise the temperature of resin under kneading, it may be sufficient to increase the kneading machine set temperature, but in this
25 case, it is difficult to apply a sufficient shearing force to the resin required for good material dispersion, so that it is difficult to achieve a

uniform crosslinking in the kneading machine, thus being liable to result in fluctuation of crosslinking degree. Accordingly, an appropriate design of paddle organization is significant.

5 Figures 8 - 13 illustrate an organization of a twin-screw extruder as a preferred example of kneading machine suitably applicable in the melt-kneading step for producing the toner according to the present invention.

10 Figure 8 is a schematic side sectional illustration of such a twin-screw extruder, and Figure 9 is a detailed illustration of screws as viewed from the above of the extruder. Referring to these figures, the extruder includes two screw or paddle shafts 52 driven by a motor and enclosed within a heating cylinder 51 which is provided with a vent (hole) 53 and a supply port 54 disposed below a feed hopper 56, and an extrusion port 56. As shown in Figure 8, each screw or paddle shaft is divided into pluralities of screw sections and kneading sections disposed alternately. Each screw section is constituted by a feed screw (S) as shown in Figure 10, and each kneading section may be constituted by one or an appropriate combination of a forward feed paddle (R) (Figure 11), a residential or no feed paddle (W) (Figure 12) and a reverse feed paddle (L) (Figure 13). Another screw or paddle shaft arrangement is

15 .

20

25

illustrated in Figure 14 in a simplified form.

In preferred embodiments of such a twin-screw extruder, at least one kneading section is provided with a no-feed paddle (W) and/or a reverse feed paddle (L) in order to enhance the kneading action in a controlled manner. Examples of such a preferred embodiment are shown in Figures 15 and 16 in parallel with Figure 14.

Now, an embodiment of the image forming method according to the present invention will be described with reference to Figures 4 and 5. The surface of an electrostatic image-bearing member (photosensitive member) 1 is charged to a negative potential or a positive potential by a primary charger 2 and exposed to image light 5 as by analog exposure or laser beam scanning to form an electrostatic image (e.g., a digital latent image as by laser beam scanning) on the photosensitive member. Then, the electrostatic image is developed with a magnetic toner 13 carried on a developing sleeve 4 according to a reversal development mode or a normal development mode. The toner 13 is initially supplied to a vessel of a developing device 9 and applied as a layer by a magnetic blade 11 on the developing sleeve 4 containing therein a magnet 23 having magnetic poles N_1 , N_2 , S_1 and S_2 . At the development zone, a bias electric field is formed between the electroconductive

substrate 16 of the photosensitive member 1 and the
developing sleeve 4 by applying an alternating bias, a
pulse bias and/or a DC bias voltage from a bias
voltage application means 12 to the developing sleeve
5 4.

The magnetic toner image thus formed on the
photosensitive member 1 is transferred via or without
via an intermediate transfer member onto a recording
material (recording paper) P. When recording paper P
10 is conveyed to a transfer position, the back side
(i.e., a side opposite to the photosensitive member)
of the paper P is positively or negatively charged by
a transfer charger 3 to electrostatically transfer the
negatively or positively charged magnetic toner image
15 on the photosensitive member 1 onto the recording
paper P. Then, the recording paper P carrying the
toner image is charge-removed by discharge means 22,
separated from the photosensitive member 1 and
subjected to heat-pressure fixation of the toner image
20 by a hot pressure roller fixing device 7 containing
therein heaters 21.

Residual magnetic toner remaining on the
photosensitive member 1 after the transfer step is
removed by a cleaning means comprising a cleaning
25 blade 8. The photosensitive member 1 after the
cleaning is charge-removed by erase exposure means 6
and then again subjected to an image forming cycle

starting from the charging step by the primary charger
2.

The electrostatic image bearing member or
photosensitive member in the form of a drum 1 may
5 comprise a photosensitive layer 15 formed on an
electroconductive support 16 (Figure 5). The non-
magnetic cylindrical developing sleeve 4 is rotated so
as to move in an identical direction as the
photosensitive member 1 surface at the developing
10 position. Inside the non-magnetic cylindrical
developing sleeve 4, a multi-polar permanent magnet
(magnet roll) 23 is disposed so as to be not rotated.
The magnetic toner 13 in the developing device 9 is
applied onto the developing sleeve 4 and provided with
15 a triboelectric charge due to friction between the
developing sleeve 4 surface and the magnetic toner
particles. Further, by disposing an iron-made
magnetic blade 11 in proximity to (e.g., with a gap of
50 - 500 μm from) the developing sleeve 4 surface so
20 as to be opposite to one magnetic pole of the multi-
polar permanent magnet, the magnetic toner is
controlled to be in a uniformly small thickness (e.g.,
30 - 300 μm) that is identical to or smaller than the
clearance between the photosensitive member 1 and the
25 developing sleeve 4 at the developing position. The
rotation speed of the developing sleeve 4 is
controlled so as to provide a circumferential velocity

identical or close to that of the photosensitive member 1 surface. The iron blade 11 as a magnetic doctor blade can be replaced by a permanent magnet so as to provide a counter magnetic pole. At the
5 developing position, an AC bias or a pulse bias voltage may be applied to the developing sleeve 4 from a bias voltage application means 12. The AC bias voltage may preferably have a frequency f of 200 - 4,000 Hz and a peak-to-peak voltage V_{pp} of 500 - 3,000
10 volts.

Under the action of an electrostatic force on the photosensitive member surface and the AC bias or pulse bias electric field at the developing position, the magnetic toner particles are transferred onto an
15 electrostatic image on the photosensitive member 1.

It is also possible to replace the magnetic blade with an elastic blade comprising an elastic material, such as silicone rubber, so as to apply a pressing force for applying a magnetic toner layer on
20 the developing sleeve while regulating the magnetic toner layer thickness.

Because of the above-mentioned specific visco-elastic properties, the toner according to the present invention may exhibit particularly
25 advantageous effects when used in a high speed machine having a process speed of preferably 200 mm/sec or larger.

In the image forming method according to the present invention, the photosensitive member may comprise amorphous silicon (a-Si), an organic photoconductor (OPC), selenium, or other inorganic photoconductors. In view of the stability of latent image potential during continuous image formation, it is preferred to use a-Si or OPC and is especially preferred to a-Si when used in a high-speed machine as described above requiring a severe durability of the photosensitive member.

Another image forming method to which the toner according to the present invention is applicable will now be described with reference to Figure 6.

Referring to Figure 6, the surface of a photosensitive drum 101 as an electrostatic image-bearing member is charged to a negative polarity by a contact (roller) charging means 119 as a primary charging means and exposed to image scanning light 115 from a laser to form a digital electrostatic latent image on the photosensitive drum 101. The digital latent image is developed by a reversal development mode with a magnetic toner 104 held in a hopper 103 of a developing device equipped with a developing sleeve 108 (as a toner-carrying member) enclosing a multi-polar permanent magnet 105 and an elastic regulating blade 111 as a toner layer thickness-regulating member. As shown in Figure 6, at a developing region

D, an electroconductive substrate of the photosensitive drum 101 is grounded, and the developing sleeve 108 is supplied with an alternating bias, a pulse bias and/or a direct current bias from a bias voltage application means 109. When a recording material P is conveyed and arrives at a transfer position, a backside (opposite to the photosensitive drum) of the recording material P is charged by a contact (roller) transfer means 113 as a transfer means connected to a voltage application means 114, whereby the toner image formed on the photosensitive drum 101 is transferred onto the recording material P. The recording material P is then separated from the photosensitive drum 101 and conveyed to a hot pressure roller fixing device 117 as a fixing means, whereby the toner image is fixed onto the recording material P.

A portion of the magnetic toner 104 remaining on the photosensitive drum 101 after the transfer step is removed by a cleaning means 118 having a cleaning blade 118a. If the amount of the residual toner is little, the cleaning step can be omitted. The photosensitive drum 101 after the cleaning is charge-removed by erasure exposure means 116, as desired, and further subjected a series of the above-mentioned steps starting with the charging step by the contact (roller) charging means 119 as a primary charging

means.

In the above-mentioned series of steps, the photosensitive drum 101 (i.e., an electrostatic image-bearing member) comprises a photosensitive layer and an electroconductive substrate, and rotates in a direction of an indicated arrow. The developing sleeve 108 as a toner-carrying member in the form of a non-magnetic cylinder rotates so as to move in a direction to the surface-moving direction of the photosensitive drum 101 at the developing region D. Inside the developing sleeve 108, a multi-polar permanent magnet (magnet roll) 105 is disposed so as not to rotate. The magnetic toner 104 in the developer vessel 103 is applied onto the developing sleeve 108 and provided with a triboelectric charge of, e.g., negative polarity, due to friction with the developing sleeve 108 surface and/or other magnetic toner particles. Further, the elastic regulation blade 111 is elastically pressed against the developing sleeve 108 so as to regulate the toner layer in a uniformly small thickness (30 - 300 μm) that is smaller than a gap between the photosensitive drum 101 and the developing sleeve 108 in the developing region D. The rotation speed of the developing sleeve 108 is adjusted so as to provide a surface speed thereof that is substantially equal or close to the surface speed of the photosensitive drum

101. In the developing region D, the developing sleeve 108 may be supplied with a bias voltage comprising an AC bias, a pulse bias on an AC-DC superposed bias from the bias voltage application means 109. The AC bias may have $f = 200 - 4000$ Hz and $V_{pp} = 500 - 3000$ volts. At the developing region, the magnetic toner is transferred onto the electrostatic image side under the action of an electrostatic force on the photosensitive drum 101 surface and the developing bias voltage.

In case where an image forming apparatus as described above is used as a printer for facsimile, the above-mentioned image exposure means corresponds to that for printing received data. Figure 7 shows such an embodiment by using a block diagram.

Referring to Figure 7, a controller 131 controls an image reader (or image reading unit) 130 and a printer 139. The entirety of the controller 131 is regulated by a CPU (central processing unit) 137. Read data from the image reader 130 is transmitted through a transmitter circuit 133 to another terminal such as facsimile. On the other hand, data received from another terminal such as facsimile is transmitted through a receiver circuit 132 to the printer 139. An image memory 136 stores prescribed image data. A printer controller 138 controls the printer 139. In Figure 7, reference numeral 134 denotes a telephone

set.

More specifically, an image received from a line (or circuit) 135 (i.e., image information received from a remote terminal connected by the line) is demodulated by means of the receiver circuit 132, decoded by the CPU 137, and sequentially stored in the image memory 136. When image data corresponding to at least one page is stored in the image memory 136, image recording is effected with respect to the corresponding page. The CPU 137 reads image data corresponding to one page from the image memory 136, and transmits the decoded data corresponding to one page to the printer controller 138. When the printer controller 138 receives the image data corresponding to one page from the CPU 137, the printer controller 138 controls the printer 139 so that image data recording corresponding to the page is effected. During the recording by the printer 139, the CPU 137 receives another image data corresponding to the next page.

Thus, receiving and recording of an image may be effected by means of the apparatus shown in Figure 7 in the above-mentioned manner.

As described above, because of the specific visco-elastic properties, the toner according to the present invention is excellent in low-temperature fixability and anti-offset property and can be

suitably used in a high-speed fixation system. If the THF-soluble content of the toner is set to have a specific molecular weight distribution, particularly with respect to contents of components in intermediate molecular weight regions, the fixability and anti-offset property as well as the fog-prevention performance of the toner can be further improved.

[Examples]

Hereinbelow, the present invention will be described more specifically based on Examples, which should not however be construed to limit the scope of the invention in any way.

(Copolymer Synthesis Example 1)

	Glycidyl acrylate	20 wt. part(s)
15	Styrene	70 "
	n-Butylacrylate	10 "
	2,2-Bis(4,4-di-t-butylperoxy-cyclohexyl)propane	1.0 "

The above ingredients were placed together with 300 wt. parts of xylene in a four-necked flask and subjected to 6 hours of reaction under xylene refluxing. After the reaction, the solvent was removed to obtain Copolymer (A) which exhibited a weight-average molecular weight (M_w) of 1.2×10^4 according to GPC measurement.

(Copolymer Synthesis Example 2)

	Glycidyl acrylate	40 wt. part(s)
--	-------------------	----------------

Styrene	50	"
n-Butylacrylate	10	"
2,2-Bis(4,4-di-t-butylperoxy- cyclohexyl)propane	1.0	"

5 Copolymer (B) ($M_w = 1.3 \times 10^4$) was prepared in the same manner as in Copolymer Synthesis Example 1 except for using the above ingredients.

(Copolymer Synthesis Example 3)

	Glycidyl acrylate	10 wt. part(s)
10	Styrene	80 "
	n-Butylacrylate	10 "
	2,2-Bis(4,4-di-t-butylperoxy- cyclohexyl)propane	1.0 "

15 Copolymer (C) ($M_w = 1.1 \times 10^4$) was prepared in the same manner as in Copolymer Synthesis Example 1 except for using the above ingredients.

(Copolymer Synthesis Example 4)

	Styrene	63 wt. part(s)
	n-Butylacrylate	25 "
20	Monobutyl maleate	12 "
	Di-tertbutyl peroxide	1.5 "

25 200 wt. parts of xylene was placed in a four-necked flask and, after sufficient aeration with nitrogen, heated to its reflux temperature under stirring. Into the flask containing the xylene under refluxing, the above ingredients were added dropwise in 4 hours, and thereafter the polymerization was

completed under xylene refluxing, followed by solvent removal, to obtain Copolymer (D) ($M_w = 3500$).

(Copolymer Synthesis Example 5)

	Styrene	69 wt. part(s)
5	n-Butylacrylate	25 "
	Methacrylic acid	6 "
	Di-tertbutyl peroxide	1.5 "

200 wt. parts of xylene was placed in a four-necked flask and, after sufficient aeration with
10 nitrogen, heated to its reflux temperature under stirring. Into the flask containing the xylene under refluxing, the above ingredients were added dropwise in 4 hours, and thereafter the polymerization was completed under xylene refluxing, followed by solvent
15 removal, to obtain Copolymer (E) ($M_w = 3800$).

[Binder Synthesis Example 1]

	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	2 "

20 The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete
25 the polymerization. Then, 6 wt. parts of Copolymer (A) and 28 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution,

stirring to effect crosslinking under xylene refluxing
and solvent removal to recover Binder resin 1.

[Binder Synthesis Example 2]

	Styrene	84 wt. part(s)
5	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	1.8 "

The above ingredients were added dropwise in
4 hours to 300 wt. parts of xylene under stirring
which had been placed in a four-necked flask,
10 sufficiently aerated with nitrogen and heated to
refluxing, followed by 2 hours of reaction to complete
the polymerization. Then, 6 wt. parts of Copolymer
(A) and 28 wt. parts of Copolymer (D) were added to
the reaction mixture, followed by dissolution,
15 stirring to effect crosslinking under xylene refluxing
and solvent removal to recover Binder resin 2.

[Binder Synthesis Example 3]

	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "
20	Di-tert-butyl peroxide	2.2 "

The above ingredients were added dropwise in
4 hours to 300 wt. parts of xylene under stirring
which had been placed in a four-necked flask,
sufficiently aerated with nitrogen and heated to
25 refluxing, followed by 2 hours of reaction to complete
the polymerization. Then, 8 wt. parts of Copolymer
(A) and 35 wt. parts of Copolymer (D) were added to

the reaction mixture, followed by dissolution,
stirring to effect crosslinking under xylene refluxing
and solvent removal to recover Binder resin 3.

[Binder Synthesis Example 4]

5	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	2.3 "

The above ingredients were added dropwise in
4 hours to 300 wt. parts of xylene under stirring
10 which had been placed in a four-necked flask,
sufficiently aerated with nitrogen and heated to
refluxing, followed by 2 hours of reaction to complete
the polymerization. Then, 5 wt. parts of Copolymer
(C) and 20 wt. parts of Copolymer (E) were added to
15 the reaction mixture, followed by dissolution,
stirring to effect crosslinking under xylene refluxing
and solvent removal to recover Binder resin 4.

[Binder Synthesis Example 5]

	Styrene	84 wt. part(s)
20	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	1.6 "

The above ingredients were added dropwise in
4 hours to 300 wt. parts of xylene under stirring
which had been placed in a four-necked flask,
25 sufficiently aerated with nitrogen and heated to
refluxing, followed by 2 hours of reaction to complete
the polymerization. Then, 8 wt. parts of Copolymer

(A) and 35 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 5.

5 [Binder Synthesis Example 6]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	3 "

10 The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 5 wt. parts of Copolymer
15 (A) and 20 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 6.

[Binder Synthesis Example 7]

20 Styrene	86 wt. part(s)
n-Butyl acrylate	14 "
Di-tert-butyl peroxide	1 "

25 The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete

the polymerization. Then, 6 wt. parts of Copolymer (A) and 28 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 7.

[Binder Synthesis Example 8]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	2.7 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 6 wt. parts of Copolymer (A) and 28 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 8.

[Binder Synthesis Example 9]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	2.8 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to

refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 8 wt. parts of Copolymer (C) and 35 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution,
5 stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 9.

[Binder Synthesis Example 10]

	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "
10	Di-tert-butyl peroxide	1.2 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to
15 refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 5 wt. parts of Copolymer (B) and 20 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution,
stirring to effect crosslinking under xylene refluxing
20 and solvent removal to recover Binder resin 10.

[Binder Synthesis Example 11]

	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	2.7 "

25 The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask,

sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 5 wt. parts of Copolymer (C) and 20 wt. parts of Copolymer (E) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 11.

[Binder Synthesis Example 12]

	Styrene	84 wt. part(s)
10	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	1.5 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 6.5 wt. part of divinylbenzene, 5 wt. parts of Copolymer (A) and 28 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 12.

[Binder Synthesis Example 13]

	Styrene	84 wt. part(s)
25	n-Butyl acrylate	16 "
	Di-tert-butyl peroxide	2 "

The above ingredients were added dropwise in

4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 6 wt. parts of Copolymer (C) and 35 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 13.

10 [Binder Synthesis Example 14]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	2.4 "

15 The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 10 wt. parts of Copolymer (A) and 22 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 14.

[Binder Synthesis Example 15]

25 Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	2.4 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 6 wt. parts of Copolymer (A) and 28 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 15.

[Binder Synthesis Example 16]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	1.3 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 12 wt. parts of Copolymer (C) and 28 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 16.

[Binder Synthesis Example 17]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "

Di-tert-butyl peroxide 4 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, 5 sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 5 wt. parts of Copolymer (C) and 35 wt. parts of Copolymer (E) were added to the reaction mixture, followed by dissolution, 10 stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 17.

[Binder Synthesis Example 18]

	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "
15	Di-tert-butyl peroxide	0.5 "
	Divinylbenzene	0.5 "

The above ingredients were added dropwise into 200 wt. parts of water containing 0.2 wt. part of incompletely saponified polyvinyl alcohol under 20 vigorous stirring to form a suspension liquid. The system was then subjected to 8 hours of suspension polymerization at 80 °C. After the reaction, the polymerizate was washed with water, de-watered and dried to recover Binder resin 18.

25 [Binder Synthesis Example 19]

	Styrene	84 wt. part(s)
	n-Butyl acrylate	16 "

Di-tert-butyl peroxide	4	"
------------------------	---	---

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 2 wt. parts of Copolymer (C) and 20 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 19.

[Binder Synthesis Example 20]

Styrene	84 wt. part(s)
n-Butyl acrylate	16 "
Di-tert-butyl peroxide	0.7 "

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 8 wt. parts of Copolymer (B) and 35 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 20.

[Binder Synthesis Example 21]

Styrene	84 wt. part(s)
---------	----------------

n-Butyl acrylate	16	"
Di-tert-butyl peroxide	2	"

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 10 wt. parts of Copolymer (B) and 44 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 21.

[Binder Synthesis Example 22]

Styrene	84 wt. part(s)	
n-Butyl acrylate	16	"
Di-tert-butyl peroxide	3	"

The above ingredients were added dropwise in 4 hours to 300 wt. parts of xylene under stirring which had been placed in a four-necked flask, sufficiently aerated with nitrogen and heated to refluxing, followed by 2 hours of reaction to complete the polymerization. Then, 3 wt. parts of Copolymer (A) and 15 wt. parts of Copolymer (D) were added to the reaction mixture, followed by dissolution, stirring to effect crosslinking under xylene refluxing and solvent removal to recover Binder resin 22.

[Binder Synthesis Example 23]

	Copolymer (D)	30 wt. part(s)
	Styrene	45.65 "
	n-Butyl acrylate	20 "
	Monobutyl maleate	4.0 "
5	Divinylbenzene	0.35 "
	Benzoyl peroxide	1.0 "
	Di-t-butylperoxy-2-ethylhexanoate	0.5 "

The above ingredients were added dropwise into 200 wt. parts of water containing 0.2 wt. part of incompletely saponified polyvinyl alcohol under vigorous stirring to form a suspension liquid. The system was then subjected to 8 hours of suspension polymerization at 80 °C. After the reaction, the polymerizate was washed with water, de-watered and dried to recover Binder resin 23.

<Example 1>

	Binder resin 1	100 wt. part(s)
	Triiron tetroxide 1	90 "
	(number-average particle size (Dn) = 0.2 μm, Hc = 8.2 kA/m, $\sigma_s = 86.5 \text{ Am}^2/\text{kg}$, $\sigma_r = 9.1 \text{ Am}^2/\text{kg}$)	
20	Triphenylmethane lake pigment	2 "
	Salicylic acid aluminum complex	0.5 "
	Polyethylene wax 1	6 "
25	(melting point (T _{mp}) = 77 °C, melt-viscosity at 160°C (V _{160°C}) = 8 mPa.sec)	

The above ingredients were preliminarily

blended and then melt-kneaded through a twin screw extruder having a paddle organization as shown in Figure 15 including kneading sections (Ln1 and Ln2) provided with non-feed paddles (W) and a reverse feed paddle (L) in addition to a forward feed paddle (R) and having a set cylinder temperature of 150 °C. The thus-kneaded product was cooled, coarsely crushed by a cutter mill and then finely pulverized by a pulverizer using a jet air stream, followed by classification by a pneumatic classifier to obtain black fine powder (Toner 1) having a weight-average particle size (D4) of 7.0 µm. The visco-elastic properties, GPC molecular weight distribution and some other properties (including THF-insoluble content (THF_{ins} (wt. %)) and weight-average particle size (D4)) of Toner 1 are shown in Table 1 together with those of other toners prepared in the following Examples. Graphs showing visco-elastic properties and a GPC chromatogram of Toner 1 are shown in Figures 1 and 2, respectively.

100 wt. parts of Toner 1 prepared above was externally blended with 0.8 wt. part of positively chargeable hydrophobic colloidal silica fine powder A (BET specific surface area (S_{BET}) = 95 m²/g) to prepare positively chargeable Magnetic toner 1 carrying the colloidal silica fine powder on the surface of toner particles. Magnetic toner 1 was then

subjected to tests for evaluating low-temperature fixability, anti-offset property, fixing roller soiling, anti-blocking property and developing performance.

5 As a result, Magnetic toner 1 exhibited good low-temperature fixability and anti-offset property, and was free from causing the winding of fixation sheet about the fixing roller or traces of separation claws in the resultant fixed images. The resultant
10 images exhibited a good fog-free level at the initial stage and on a 50000-th sheet of continuous image formation. No problem was observed regarding the anti-blocking property or tone melt-sticking onto the photosensitive member. The results of evaluation are
15 summarized in Table 2 appearing hereinafter together with those of other toners prepared and evaluated in the following Examples.

The details of the evaluation tests are as follows.

20 Test machine

A commercially available electrophotographic copying machine having a structure as shown in Figure 4 and equipped with a fixing roller surfaced with a polytetrafluoroethylene (PTFE) resin layer ("NP6750",
25 mfd. by Canon K.K.) was remodeled by using a negatively chargeable a-Si photosensitive drum and bias power supply adapted therefor so as to allow the

use of a positively chargeable toner.

Fixing performances

The fixing device of the above-remodeled test device was taken out to provide a heating roller-type
5 external fixing device allowing variable fixing temperatures, which was used to effect the low-temperature fixability and anti-offset property tests.

The external fixing device was set to provide a nip of 8.5 mm and a process speed of 400 mm/sec.

10 The fixing temperatures were set in the range of 100 - 245 °C at increments of 5 °C each, and fixed images at the respective temperatures were rubbed with a lens cleaning paper at a load of 50 g/cm² to determine the lowest fixing temperature giving an image density
15 lowering of at most 10 % as a fixing initiation temperature (T_{FI}). Further, as the fixing temperature was increased, the lowest temperature free from offset was determined as a low-temperature offset-free (initial) point ($T_{offset.min}$) and the highest
20 temperature free from offset was determined as a high-temperature offset-free (end) point ($T_{offset.max}$).

Developing performance, Toner melt-sticking, Anti-fixing roller winding and Separation claw trace

A continuous image formation on 50,000 sheets
25 was performed by using ca. 300 g of a toner charged in the above-mentioned test machine (remodeled "NP6750") to evaluate image fog at the initial stage and on the

50,000-th sheet, and melt-sticking onto the
photosensitive member, and winding of fixing sheet
about the fixing roller and separation claw traces on
solid black image when reproducing such solid black
5 images after the continuous image formation on 50,000
sheets.

Fog was determined as a difference between
the whitenesses of a blank white recording paper and
the white recording paper on which a solid white image
10 was formed based on whiteness values measured by a
reflectometer (available from Tokyo Denshoku K.K.).

The melt-sticking on the photosensitive
member was evaluated with eyes according to the
following standard.

15 A: No toner melt-sticking was observed at all on
the photosensitive member.

B: Slight toner melt-sticking was observed on
the photosensitive member but was not recognized on
the resultant images.

20 C: White spot-like image dropouts were observed
in solid black images.

D: Image dropouts in the form of spots to
shooting stars were observed on solid black images.

Winding about the fixing roller and the
25 separation claw trace were evaluated by reproducing a
wholly solid black image on A4-size paper sheets
except for a leading white margin width of 4.5 mm-

according to the following standards.

(Winding about the fixing roller)

A: Recording sheets after the fixation were smoothly discharged.

5 B: Recording sheets after the fixation were discharged without problem while relying on the separation claws.

C: Recording sheets after the fixation and discharge were accompanied with twist.

10 D: Recording sheets after the fixation caused paper jamming.

(Separation claw trace)

A: No separation claw trace was observed at all on the fixed (solid black) images.

15 B: The fixed images were accompanied with 1 - 2 slight trace lines of separation claws.

C: The fixed images were accompanied with 3 - 4 slight trace lines of separation claws.

20 D: The fixed images were accompanied with 5 - 6 clear trace lines of separation claws.

Fixing roller soiling

An image formation test similar to the one performed for evaluating the toner-melt-sticking was performed on 50,000 sheets by reproducing a lattice
25 pattern including a combination of longitudinal and transverse lines each in a width of 0.2 mm and drawn in a density of 2 lines/cm. Thereafter, the toner

attachment on the fixing roller and the influence thereof for causing white dropout on solid black images were observed to allow an evaluation according to the following standard.

5 A: No soiling was observed at all on the fixing roller.

 B: Slight lines of attached toner were observed on the fixing roller but no influence thereof was observed on the resultant images.

10 C: White dropout lines were observed in the solid black images at a rate of about 1 line per 5 cm-width.

 D: White dropout lines were observed in the solid black images at a rate corresponding to that on
15 the original lattice image.

Anti-blocking property

 Ca. 10 g of a toner sample was placed in a 100 cc-plastic cup and left standing at 50 °C for 3 days. The state of the toner was thereafter evaluated
20 with eyes.

 A: No agglomerate was observed.

 B: Some agglomerate was observed but readily collapsed.

 C: Some agglomerate was observed but was
25 collapsed by shaking.

 D: Agglomerate could be gripped and was not collapsed readily.

<Example 2>

	Binder resin 2	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Monoazo metal complex	2 "
5	Salicylic acid aluminum complex	0.5 "
	Polyethylene wax 2	6 "

(T_{mp} = 150 °C, V (160 °C) = 15 mPa.s)

Black fine powder (Toner 2) (D₄ = 7.2 μm)
having properties shown in Table 1 was prepared from
10 the above ingredients otherwise in the same manner as
in Example 1.

100 wt. parts of Toner 2 prepared above was
externally blended with 0.8 wt. part of negatively
chargeable hydrophobic colloidal silica fine powder B
15 (S_{BET} = 160 m²/g) to prepare negatively chargeable
Magnetic toner 2, which was evaluated with respect to
items identical to those evaluated in Example 1 by
using the commercially available electrophotographic
copying apparatus having a structure as shown in
20 Figure 4 and adapted for using a negatively chargeable
toner ("NP6750", mfd. by Canon K.K.) without the
remodeling with respect to the photosensitive member
or the bias power supply. The results and are shown
in Table 2 together with those obtained in the
25 following Examples.

<Example 3>

Binder resin 3	100 wt. part(s)
----------------	-----------------

Triiron tetroxide 1	90	"
Triphenylmethane lake pigment	2	"
Salicylic acid aluminum complex	0.5	"
Polyethylene wax 3	6	"

5 (Tmp = 85 °C, V (160 °C) = 9 mPa.s)

Black fine powder (Toner 3) (D4 = 6.8 µm) was prepared from the above ingredients otherwise in the same manner as in Example 1.

10 100 wt. parts of Toner 3 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 3, which was evaluated in the same manner as in Example 1.

<Example 4>

15	Binder resin 4	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Salicylic acid aluminum complex	0.5 "
	Polyethylene wax 1	6 "

20 Black fine powder (Toner 4) (D4 = 6.9 µm) was prepared from the above ingredients otherwise in the same manner as in Example 1.

25 100 wt. parts of Toner 4 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 4, which was evaluated in the same manner as in Example 1.

<Example 5>

	Binder resin 5	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
5	Acetylacetone iron complex	0.5 "
	Polyethylene wax 1	6 "

Black fine powder (Toner 5) ($D_4 = 7.0 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

10 100 wt. parts of Toner 5 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 5, which was evaluated in the same manner as in Example 1.

15 <Example 6>

	Binder resin 6	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Salicylic acid aluminum complex	0.5 "
20	Polypropylene wax 4	6 "

($T_{mp} = 135 ^\circ\text{C}$, $V (160 ^\circ\text{C}) = 215 \text{ mPa.s}$)

Black fine powder (Toner 6) ($D_4 = 6.8 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

25 100 wt. parts of Toner 6 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable

Magnetic toner 6, which was evaluated in the same manner as in Example 1.

<Example 7>

	Binder resin 7	100 wt. part(s)
5	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Acetylacetone iron complex	0.7 "
	Polyethylene wax 1	6 "

Black fine powder (Toner 7) ($D_4 = 7.1 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 7 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 7, which was evaluated in the same manner as in Example 1.

<Example 8>

	Binder resin 8	100 wt. part(s)
	Triiron tetroxide 1	90 "
20	Triphenylmethane lake pigment	2 "
	Acetylacetone iron complex	0.5 "
	Polyethylene wax 1	6 "

Black fine powder (Toner 8) ($D_4 = 7.0 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 8 was externally blended with 0.8 wt. part of positively chargeable

colloidal silica A to form positively chargeable
Magnetic toner 8, which was evaluated in the same
manner as in Example 1.

<Example 9>

5	Binder resin 9	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Acetylacetone iron complex	0.1 "
	Polyethylene wax 3	6 "

10 Black fine powder (Toner 9) ($D_4 = 6.8 \mu\text{m}$) was
prepared from the above ingredients otherwise in the
same manner as in Example 1.

100 wt. parts of Toner 9 was externally
blended with 0.8 wt. part of positively chargeable
15 colloidal silica A to form positively chargeable
Magnetic toner 9, which was evaluated in the same
manner as in Example 1.

<Example 10>

	Binder resin 19	100 wt. part(s)
20	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Salicylic acid aluminum complex	1.0 "
	Polyethylene wax 5	6 "

($T_{mp} = 74 ^\circ\text{C}$, $V (160 ^\circ\text{C}) = 7 \text{ mPa.s}$)

25 Black fine powder (Toner 10) ($D_4 = 7.2 \mu\text{m}$)
was prepared from the above ingredients otherwise in
the same manner as in Example 1.

100 wt. parts of Toner 10 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 10, which was evaluated in the same manner as in Example 1.

<Example 11>

	Binder resin 11	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
10	Salicylic acid aluminum complex	0.3 "
	Polypropylene wax 4	6 "

Black fine powder (Toner 11) ($D_4 = 7.1 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 11 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 11, which was evaluated in the same manner as in Example 1.

<Example 12>

	Binder resin 12	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Salicylic acid aluminum complex	0.7 "
25	Polyethylene wax 1	6 "

Black fine powder (Toner 12) ($D_4 = 7.0 \mu\text{m}$) was prepared from the above ingredients otherwise in

the same manner as in Example 1.

100 wt. parts of Toner 12 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable
5 Magnetic toner 12, which was evaluated in the same manner as in Example 1.

<Example 13>

	Binder resin 13	100 wt. part(s)
	Triiron tetroxide 1	90 "
10	Triphenylmethane lake pigment	2 "
	Acetylacetone iron complex	0.7 "
	Polyethylene wax 1	3 "
	Polyethylene wax 3	3 "

Black fine powder (Toner 13) ($D_4 = 6.9 \mu\text{m}$)
15 was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 13 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable
20 Magnetic toner 13, which was evaluated in the same manner as in Example 1.

<Example 14>

	Binder resin 14	100 wt. part(s)
	Triiron tetroxide 1	90 "
25	Monoazo metal complex	2 "
	Salicylic acid aluminum complex	0.5 "
	Polyethylene wax 3	6 "

Black fine powder (Toner 14) ($D_4 = 7.0 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 14 was externally
5 blended with 0.8 wt. part of negatively chargeable colloidal silica A to form negatively chargeable Magnetic toner 14, which was evaluated in the same manner as in Example 2.

<Example 15>

10 Black fine powder (Toner 15) ($D_4 = 7.1 \mu\text{m}$) was prepared in the same manner as in Example 1 except for using a kneading machine having a paddle organization as shown in Figure 16 having kneading sections provided with increased numbers of
15 reverse feed paddles (L) and non-feed paddles (W) while setting the entire cylinder temperature to 170°C .

100 wt. parts of Toner 16 was externally
blended with 0.8 wt. part of positively chargeable
20 colloidal silica A to form positively chargeable Magnetic toner 16, which was evaluated in the same manner as in Example 1.

<Example 16>

Black fine powder (Toner 16) ($D_4 = 7.0 \mu\text{m}$)
25 was prepared in the same manner as in Example 1 except for using Fischer Tropsche wax 6 ($T_{\text{mp}} = 105^\circ\text{C}$, η (160°C) = 11 mPa.s) instead of Polyethylene wax 1 used in

Example 1.

100 wt. parts of Toner 16 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable
5 Magnetic toner 16, which was evaluated in the same manner as in Example 1.

<Example 17>

Black fine powder (Toner 17) ($D_4 = 7.1 \mu\text{m}$) was prepared in the same manner as in Example 1 except
10 for using Triiron tetroxide 2 ($D_n = 0.18 \mu\text{m}$, $H_c = 11.5 \text{ kA/m}$, $\sigma_s = 8.25 \text{ Am}^2/\text{kg}$, $\sigma_r = 12.1 \text{ Am}^2/\text{kg}$) instead of Triiron tetroxide 1 used in Example 1.

100 wt. parts of Toner 17 was externally blended with 0.8 wt. part of positively chargeable
15 colloidal silica A to form positively chargeable Magnetic toner 17, which was evaluated in the same manner as in Example 1.

<Example 18>

Positively chargeable Magnetic toner 18 was prepared in the same manner as in Example 1 except
20 that 100 wt. parts of Toner 1 was externally blended with 0.8 wt. part of positively chargeable silica fine powder B ($S_{\text{BET}} = 125 \text{ m}^2/\text{g}$) instead of positively chargeable silica fine powder A used in Example 1.
25 Magnetic toner 18 was evaluated in the same manner as in Example 1.

<Comparative Example 1>

Binder resin 15	100 wt. part(s)
Triiron tetroxide 1	90 "
Triphenylmethane lake pigment	2 "
Polyethylene wax 1	6 "

5 Black fine powder (Toner 19) ($D_4 = 6.8 \mu\text{m}$)
was prepared from the above ingredients otherwise in
the same manner as in Example 1.

10 100 wt. parts of Toner 19 was externally
blended with 0.8 wt. part of positively chargeable
colloidal silica A to form positively chargeable
Magnetic toner 19, which was evaluated in the same
manner as in Example 1. Magnetic toner 19 exhibited
inferior anti-low temperature offset property and
anti-high temperature offset property than Magnetic
15 toner 1 of Example 1. Further, Magnetic toner 19
resulted in the winding of fixation sheet about the
fixing roller. The results of evaluation are
inclusively shown in Table 1 together with those of
Examples described above and Comparative Examples
20 described below.

<Comparative Example 2>

Binder resin 16	100 wt. part(s)
Triiron tetroxide 1	90 "
Monoazo iron complex	2 "
25 Salicylic acid aluminum complex	1.0 "
Polyethylene wax 1	6 "

Black fine powder (Toner 20) ($D_4 = 7.1 \mu\text{m}$)

was prepared from the above ingredients otherwise in the same manner as in Example 2.

100 wt. parts of Toner 20 was externally blended with 0.8 wt. part of negatively chargeable colloidal silica B to form negatively chargeable Magnetic toner 20, which was evaluated in the same manner as in Example 2. Magnetic toner 20 exhibited inferior low-temperature fixability than Magnetic toner 2 of Example 2, further caused the winding of the fixation sheet about the fixing roller, resulted in traces of separation claws in the fixed images and also caused white image dropout attributable to the soiling of the fixing roller.

<Comparative Example 3>

15	Binder resin 17	100 wt. part(s)
	Triiron tetroxide 1	90 "
	Triphenylmethane lake pigment	2 "
	Acetylacetone iron complex	0.3 "
	Polyethylene wax 1	6 "

20 Black fine powder (Toner 21) ($D_4 = 6.8 \mu\text{m}$)
was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 21 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 21, which was evaluated in the same manner as in Example 1. Magnetic toner caused

the winding of the fixation sheet about the fixing roller and traces of separation claws on the fixed images, and also exhibited inferior anti-blocking property.

5 <Comparative Example 4>

Binder resin 18	100	wt. part(s)
Triiron tetroxide 1	90	"
Triphenylmethane lake pigment	2	"
Polyethylene wax 1	6	"

10 Black fine powder (Toner 22) ($D_4 = 7.1 \mu\text{m}$)
was prepared from the above ingredients otherwise in the same manner as in Example 1.

100 wt. parts of Toner 22 was externally blended with 0.8 wt. part of positively chargeable
15 colloidal silica A to form positively chargeable
Magnetic toner 22, which was evaluated in the same manner as in Example 1. Magnetic toner 22 exhibited inferior low-temperature fixability than Magnetic toner 1 of Example 1, and further resulted in white
20 image dropout attributable to soiling of the fixing roller and winding of the fixation sheet about the fixing roller.

<Comparative Example 5>

Binder resin 19	100	wt. part(s)
25 Triiron tetroxide 1	90	"
Triphenylmethane lake pigment	2	"
Salicylic acid aluminum complex	0.5	"

Polyethylene wax 1

6 "

Black fine powder (Toner 23) ($D_4 = 6.9 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 1.

5 100 wt. parts of Toner 23 was externally blended with 0.8 wt. part of positively chargeable colloidal silica A to form positively chargeable Magnetic toner 23, which was evaluated in the same manner as in Example 1. Magnetic toner 23 resulted
10 in winding of the fixation sheet about the fixing roller and also exhibit inferior anti-blocking property.

<Comparative Example 6>

	Binder resin 20	100 wt. part(s)
15	Triiron tetroxide 1	90 "
	Monoazo iron complex	2 "
	Acetylacetone iron complex	1 "
	Polypropylene wax 4	6 "

Black fine powder (Toner 24) ($D_4 = 7.2 \mu\text{m}$)
20 was prepared from the above ingredients otherwise in the same manner as in Example 2.

100 wt. parts of Toner 24 was externally blended with 0.8 wt. part of negatively chargeable colloidal silica B to form negatively chargeable
25 Magnetic toner 24, which was evaluated in the same manner as in Example 2. Magnetic toner 24 exhibited an inferior low-temperature fixability than Magnetic

toner 2 of Example 2.

<Comparative Example 7>

	Binder resin 21	100 wt. part(s)
	Triiron tetroxide 1	90 "
5	Triphenylmethane lake pigment	2 "
	Acetylacetone iron complex	1 "
	Polyethylene wax 1	6 "

Black fine powder (Toner 25) ($D_4 = 6.9 \mu\text{m}$)
was prepared from the above ingredients otherwise in
10 the same manner as in Example 1.

100 wt. parts of Toner 25 was externally
blended with 0.8 wt. part of positively chargeable
colloidal silica A to form positively chargeable
Magnetic toner 25, which was evaluated in the same
15 manner as in Example 1. Magnetic toner 25 exhibited
inferior low-temperature fixability, anti-high-
temperature offset property and fog-suppression
performances at the initial stage and on 50,000-th
sheet than Magnetic toner 1 of Example 1. Magnetic
20 toner 25 also resulted in toner melt-sticking onto the
photosensitive member and white image dropout
attributable to soiling of the fixing roller.

<Comparative Example 8>

	Binder resin 22	100 wt. part(s)
25	Triiron tetroxide 1	90 "
	Monoazo iron complex	2 "
	Polyethylene wax 1	6 "

Black fine powder (Toner 26) ($D_4 = 7.0 \mu\text{m}$) was prepared from the above ingredients otherwise in the same manner as in Example 2.

100 wt. parts of Toner 26 was externally
5 blended with 0.8 wt. part of negatively chargeable colloidal silica B to form negatively chargeable Magnetic toner 26, which was evaluated in the same manner as in Example 2. Magnetic toner 26 exhibited inferior anti-high-temperature offset property and
10 fog-suppression performances at the initial stage and on 50,000 sheet than Magnetic toner 2 of Example 2.
<Comparative Example 9>

	Binder resin 23	100 wt. part(s)
	Triiron tetroxide 1	90 "
15	Salicylic acid chromium complex	2 "
	Polypropylene wax 4	6 "

Black fine powder (Toner 27) ($D_4 = 7.2 \mu\text{m}$) was prepared in the same manner as in Example 1 except for kneading the above ingredients in the same twin-
20 screw extruder as used in Example 1 while setting the entire cylinder temperature at 110°C .

100 wt. parts of Toner 27 was externally blended with 0.8 wt. part of negatively chargeable colloidal silica B to form positively chargeable
25 Magnetic toner 27, which was evaluated in the same manner as in Example 2.

As a result, Magnetic toner 27 resulted in

inferior performances regarding suppression of
separation claw traces and winding of fixation about
the fixing roller.

5

10

15

20


25

Table 1: Toner properties

Toner	Visco - elasticities										G P C					THF ins. (wt.%)	D4 (μ m)
	160 °C			190 °C			G' (160/ 190)	Min.of tan δ (80 - 200 °C)	Peak M.W.		Areal percentage (%) in M.W. ranges ($\times 10^4$)						
	G' (Pa)	G'' (Pa)	tan δ	G' (Pa)	G'' (Pa)	tan δ			main peak	sub - peak	10 - 20	20 - 50	50 - 100	> 100			
1	3700	1700	0.48	4000	830	0.21	0.93	no	14000	1100	3.1	4.0	2.0	1.1	25	7.0	
2	4900	2200	0.45	4800	1500	0.31	1.02	no	16000	—	2.7	3.3	2.2	3.2	18.1	7.2	
3	3500	2500	0.71	3300	1300	0.39	1.06	no	12000	2100	4.1	4.3	3.7	4.7	20.3	6.8	
4	2200	680	0.31	1900	570	0.30	1.16	yes	10000	1200	3.6	2.7	0.8	0.5	8	6.9	
5	5200	2300	0.44	4900	390	0.08	1.06	no	18000	1100	1.8	2.0	4.3	5.5	37	7.0	
6	1800	1600	0.89	1000	820	0.41	1.80	no	5000	—	1.2	1.4	1.8	3.1	10.5	6.8	
7	6100	1500	0.25	5900	1200	0.20	1.03	no	32000	1100	2.5	2.1	2.3	3.2	26.8	7.1	
8	3100	1100	0.35	1700	400	0.24	1.82	no	8000	1000	3.0	3.7	4.0	2.6	31.5	7.0	
9	900	680	0.76	720	530	0.74	1.25	no	6000	2300	4.0	4.5	3.8	4.8	26.3	6.9	
10	1100	2700	0.25	8900	1800	0.20	1.24	no	24000	800	1.9	1.6	1.0	1.3	19.2	7.2	
11	1200	450	0.38	970	240	0.25	1.24	yes	7000	—	2.2	1.7	1.8	0.8	15.3	7.1	
12	6500	5600	0.86	6000	3700	0.62	1.08	no	20000	1200	3.3	2.9	3.1	1.9	27	7.0	
13	3800	840	0.22	7200	360	0.05	0.53	no	15000	1600	3.7	3.0	3.2	3.6	31	6.9	
14	1300	1800	1.38	1100	1200	1.09	1.18	no	9000	2200	2.2	2.3	2.6	4.7	23.2	7.0	
15	3900	1800	0.46	4100	840	0.21	0.95	no	14000	1100	2.7	3.5	2.1	1.6	27.5	7.1	
16	3800	1900	0.50	4000	920	0.23	0.95	no	14000	—	3.0	4.1	1.9	1.2	25.2	7.0	
17	3600	1700	0.47	3900	820	0.22	0.92	no	14000	1100	3.1	3.9	2.0	1.0	24.8	7.1	
18	3700	1700	0.48	4000	830	0.21	0.93	no	14000	1100	3.1	4.0	2.0	1.1	25	7.0	
19	720	700	0.97	550	440	0.80	1.31	no	8000	900	3.2	3.6	1.8	2.3	0.2	7.0	
20	13000	240	0.02	5200	1400	0.27	2.50	no	22000	2200	2.2	1.8	3.6	2.2	23.6	7.1	
21	1200	370	0.31	930	180	0.19	1.29	yes	2700	1100	3.1	4.0	2.2	3.6	35.3	6.8	
22	7700	6400	0.83	5000	4300	0.86	1.54	no	31000	1800	4.3	3.9	3.1	8.2	0.1	7.1	
23	4000	2100	0.53	2200	190	0.09	1.82	no	2800	800	1.5	1.5	1.1	2.1	12.3	6.9	
24	7000	6500	0.93	12000	1100	0.09	0.58	no	45000	—	3.7	3.6	4.0	3.7	37.6	7.2	
25	4600	2800	0.61	2600	1800	0.69	1.77	no	15000	2500	4.2	2.7	5.4	7.3	47	6.9	
26	750	730	0.97	1400	1000	0.71	0.54	no	6000	1700	0.7	0.8	1.6	1.2	0	7.0	
27	4500	4900	1.09	2100	1700	0.81	2.14	yes	19000	—	6.4	5.9	4.0	21.5	27.3	7.2	

Table 2: Performance evaluation results

Ex. or Comp.Ex.	Fixing performance			Image fog (%)		Winding about roller	Separa- tion craw trace	Soiling of fixing roller	Melt- sticking	Anti- block
	T _{F.I.} (°C)	T _{offset.min} (°C)	T _{offset.max} (°C)	initial	on 50000-th sheet					
Ex. 1	140	135	>250	0.7	0.8	A	A	A	A	A
" 2	150	140	>250	0.8	0.9	A	A	A	A	A
" 3	145	135	245	1.7	1.8	A	A	A	A	A
" 4	140	135	240	1.4	1.6	B	B	C	A	A
" 5	155	145	245	1.3	1.4	A	A	A	C	A
" 6	150	140	245	1.4	1.5	A	A	A	A	C
" 7	155	145	>250	1	1.2	A	A	A	A	A
" 8	140	135	>250	0.9	1	A	A	A	B	B
" 9	145	150	240	1.8	2	B	B	A	A	B
" 10	155	145	245	1.5	1.7	A	A	A	A	B
" 11	150	140	240	0.8	1	B	C	C	A	B
" 12	155	145	>250	0.9	1	A	A	A	A	A
" 13	155	145	>250	0.8	1	B	B	A	B	A
" 14	140	135	240	1	1.2	A	A	A	C	B
" 15	140	135	>250	0.9	0.9	A	A	A	A	A
" 16	145	140	>250	0.3	0.4	A	A	A	A	A
" 17	140	135	>250	0.5	0.6	A	A	A	A	A
" 18	140	135	>250	0.9	0.8	A	A	A	A	A
Comp. Ex. 1	150	160	220	0.8	0.9	C	B	A	A	C
" 2	170	155	>250	1	1.2	D	D	D	A	A
" 3	140	135	>250	1.1	1.3	D	D	C	C	D
" 4	180	165	245	1.3	1.5	C	A	D	A	A
" 5	150	140	245	1.4	1.6	C	A	A	A	D
" 6	190	175	245	1.1	1.4	B	A	A	C	A
" 7	170	160	225	2.6	2.9	B	A	D	D	A
" 8	150	160	215	2.8	3.2	C	B	A	A	B
" 9	155	150	245	1.2	1.1	C	D	A	B	A



WHAT IS CLAIMED IS:

1. A toner comprising: at least a binder resin,
a wax and a colorant,

wherein the toner exhibits visco-elastic

5 properties including:

(a) a storage modulus G' (160°C) of 8.0×10^2
- 1.2×10^4 Pa at 160°C ,

(b) a loss modulus G'' (160°C) of 4.0×10^2 -
6.0 $\times 10^3$ Pa at 160°C ,

10 (c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.5 at 160°C ,

(d) a storage modulus G' (190°C) of 6.0×10^2
- 1.6×10^4 Pa at 190°C ,

15 (e) a loss modulus G'' (190°C) of 2.0×10^2 -
4.0 $\times 10^3$ Pa at 190°C ,

(f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.05 - 1.2 at 190°C ,

(g) G' (160°C)/ G' (190°C) = 0.5 - 2.0, and

(h) $\tan\delta$ (160°C) > $\tan\delta$ (190°C).

20

2. The toner according to Claim 1, having (a) a
storage modulus G' (160°C) of 1.0×10^3 - 1.0×10^4 Pa at
 160°C ,

25 (b) a loss modulus G'' (160°C) of 5.0×10^2 -
5.0 $\times 10^3$ Pa at 160°C , and

(c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.0 at 160°C .



3. The toner according to Claim 1, having (d) a storage modulus G' (190°C) of $8.0 \times 10^2 - 8.0 \times 10^3$ Pa at 190°C ,

(e) a loss modulus G'' (190°C) of $3.0 \times 10^2 - 3.0 \times 10^3$ Pa at 190°C , and

(f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.06 - 1.0 at 190°C .

4. The toner according to Claim 1, having (i) no minimum of $\tan\delta$ in the temperature range of 80 - 200 $^{\circ}\text{C}$.

5. The toner according to Claim 1, having (a) a storage modulus G' (160°C) of $1.0 \times 10^3 - 1.0 \times 10^4$ Pa at 160°C ,

(b) a loss modulus G'' (160°C) of $5.0 \times 10^2 - 5.0 \times 10^3$ Pa at 160°C ,

(c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.0 at 160°C ,

(d) a storage modulus G' (190°C) of $8.0 \times 10^2 - 8.0 \times 10^3$ Pa at 190°C ,


(e) a loss modulus G'' (190°C) of $3.0 \times 10^2 - 3.0 \times 10^3$ Pa at 190°C ,

(f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.06 - 1.0 at 190°C , and

(i) no minimum of $\tan\delta$ in the temperature range of 80 - 200 $^{\circ}\text{C}$.



This Sheet Has Been Replaced



-116-

S BEEN

6. The toner according to Claim 1, having (g) a ratio $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C})$ of 0.6 - 1.8.

7. The toner according to Claim 1, having (g) a
5 ratio $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C})$ of 0.7 - 1.5.

8. The toner according to Claim 1, containing a THF-soluble content which has such a molecular weight distribution based on a GPC chromatogram as to provide
10 a main peak in a molecular weight region of 3×10^3 - 4×10^4 and contain 1.0 - 5.0 % (by area on the chromatogram) of components in a molecular weight range of 1×10^5 - 2×10^5 , 1.0 - 5.0 % of components in a molecular weight range of 2×10^5 - 5×10^5 , 0.5 - 5.0 %
15 of components in a molecular weight range of 5×10^5 - 1×10^6 , and 0.2 - 6.0 % of components in a molecular weight range of 1×10^6 or larger.

9. The toner according to Claim 1, wherein the
20 binder and the wax contain a THF-insoluble content of 1 - 40 wt. %.

10. The toner according to Claim 1, having such a molecular weight distribution based on a GPC
25 chromatogram as to provide a main peak in a molecular weight region of 3×10^3 - 4×10^4 and contain 1.0 - 5.0 % (by area on the chromatogram) of components in a



-117-

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

molecular weight range of 1×10^5 - 2×10^5 , 1.0 - 5.0 %
of components in a molecular weight range of 2×10^5 -
 5×10^5 , 0.5 - 5.0 % of components in a molecular weight
range of 5×10^5 - 1×10^6 , and 0.2 - 6.0 % of components
5 in a molecular weight range of 1×10^6 or larger, and
the toner containing 1 - 40 wt. % of the binder and
the wax as a THF-insoluble content.

11. The toner according to Claim 1, wherein the
10 binder resin includes at least one type of
crosslinkage formed through crosslinking reactions
selected from the group consisting of:
copolymerization using a polyfunctional vinyl monomer
having two or more vinyl groups; polycondensation
15 using monomers, at least one of which is
polyfunctional; crosslinking between functional groups
of polymer molecules having a functional group via a
reactive compound capable of reacting with the
functional group; reaction between a first polymer
20 having a functional group and a second polymer having
a functional group reactive with the functional group
of the first polymer; crosslinking by polycondensation
of addition polymer(s); and crosslinking by addition
polymerization of condensation polymer(s).

25

12. The toner according to Claim 1, wherein the
binder resin includes a first type of crosslinkage



formed during production of the binder resin, and a second type of crosslinkage formed during mixing of the binder resin with other toner ingredients for toner production.

5

13. The toner according to Claim 1, wherein the binder resin includes a first type of crosslinkage formed during production of the binder resin, and a during melt-kneading of the binder resin with other
10 toner ingredients for toner production, and a second type of crosslinkage formed during the melt-kneading of the binder resin with other toner ingredients for toner production.

15 14. The toner according to Claim 1, wherein the binder resin has at least two types of crosslinkages formed by subjecting a resin having a first type of crosslinkage through a first crosslinking reaction to a second crosslinking reaction.

20

15. The toner according to Claim 1, wherein the binder resin has been obtained through a first crosslinking by reacting a resin having an acid group with a reactive compound or polymer, and then a second
25 crosslinking to provide a crosslinkage via a second reactive compound or polymer.



16. The toner according to Claim 1, wherein the binder resin includes a first type of crosslinkage formed by a first crosslinking reaction and a second type of crosslinkage formed by a second crosslinking
5 reaction;

wherein the first crosslinking reaction is selected from the group consisting of copolymerization using a polyfunctional vinyl monomer; polycondensation using monomers, at least one of which is
10 polyfunctional; crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the reactive group; reaction between a first polymer having a functional group and a second polymer having
15 a functional group reactive with the functional group of the first polymer; graft reaction using a polymerization initiator; crosslinking by polycondensation of addition polymer(s); and crosslinking by addition polymerization of
20 condensation polymer(s); and

the second crosslinking reaction is selected from the group consisting of crosslinking between functional groups of polymer molecules having such a functional group via a reactive compound capable of
25 reacting with the reactive group; and reaction between a first polymer having a functional group and a second polymer having a functional group reactive with the



functional group of the first polymer.

17. The toner according to Claim 1, wherein the binder resin includes a first type of crosslinkage
5 formed by a first crosslinking reaction, and a second type of crosslinkage formed by a second crosslinking reaction,

wherein the first crosslinking reaction is selected from the group consisting of crosslinking
10 between functional groups of polymer molecules having such a functional group via a reactive compound capable of reacting with the reactive group; and reaction between a first polymer having a functional group and a second polymer having a functional group
15 reactive with the functional group of the first polymer; and

the second crosslinking reaction is crosslinking between functional groups of polymer molecules having such a functional group via a
20 reactive compound capable of reacting with the reactive group.

18. The toner according to Claim 17, wherein the second crosslinking is effected during melt-kneading
25 of a precursor resin of the binder resin and other toner ingredients for toner production.



19. The toner according to Claim 1, wherein the binder resin includes polymer chains having functional groups which are bonded via an ester bond, an amide bond, an imide bond or a carbon-to-carbon bond to form
5 a crosslinkage.

20. The toner according to Claim 1, wherein the binder resin includes polymer chains having functional groups which are bonded via a compound selected from
10 the group consisting of acids, alcohols, amines, imines, epoxides, acid anhydrides, ketones, aldehydes, amides, esters, lactones and lactams to form a crosslinkage.

21. The toner according to Claim 1, wherein the binder includes polymer chains having acid groups which are bonded via a compound selected from the group consisting of glycidyl compounds, amine compounds, imine compounds, epoxy compounds,
15 carboxylic acid compounds, alcohol compounds, metal salts, metal complexes, and organometallic compounds to form a crosslinkage.

22. The toner according to Claim 21, wherein the
25 binder resin include polymer chains having acid groups bonded via a glycidyl compound and has been formed by reaction between (i) a glycidyl group-containing



-122-

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

5 copolymer including glycidyl group-containing vinyl
monomer units and styrene monomer units, and (ii) an
acid group-containing copolymer including acid group-
containing vinyl monomer units and styrene monomer
units.

23. The toner according to Claim 22, wherein the
glycidyl group-containing copolymer has a weight-
average molecular weight of $4 \times 10^3 - 10^5$.

10

24. The toner according to Claim 22, wherein said
glycidyl group-containing monomer is selected from the
group consisting of glycidyl acrylate, glycidyl
methacrylate, β -methylglycidyl acrylate, β -
15 methylglycidyl methacrylate, acryl glycidyl ether, and
allyl glycidyl ether.

25. The toner according to Claim 22, wherein said
glycidyl compound is used in 0.05 - 10 equivalents per
20 mol of the acid groups.

26. The toner according to Claim 21, wherein said
metal salt or metal complex includes a mono-valent
metal ion selected from the group consisting of Na^+ ,
25 Li^+ , K^+ , Cs^+ , Ag^+ , Hg^+ and Cu^+ .

27. The toner according to Claim 21, wherein said



metal salt or metal complex includes a divalent metal ion selected from the group consisting of Be^{2+} , Ba^{2+} , Mg^{2+} , , Hg^{2+} , Sn^{2+} , Pb^{2+} , Mn^{2+} , Fe^{2+} , Ca^{2+} , Ni^{2+} and An^{2+} .

5

28. The toner according to Claim 21, wherein said metal salt or metal complex includes a trivalent metal ion selected from the group consisting of Al^{3+} , Sc^{3+} , Fe^{3+} , V^{3+} , Co^{3+} , Ce^{3+} , Ni^{3+} , Cr^{3+} and Y^{3+} .

10

29. The toner according to Claim 21, wherein said metal salt or metal complex includes a tetravalent metal ion of Ti^{4+} or Zr^{4+} .

15

30. The toner according to Claim 1, wherein the binder resin includes a crosslinkage formed by a crosslinking vinyl monomer having two or more polymerizable double bonds.

20

31. The toner according to Claim 30, wherein said crosslinking vinyl monomer has been used in 0.01 - 5.0 wt. parts per 100 wt. parts of other vinyl monomers.

25

32. The toner according to Claim 1, wherein the wax has such a molecular weight distribution as to provide a number-average molecular weight (M_n) of 200 - 1200, a weight-average molecular weight (M_w) of 300



- 3600, and a ratio Mw/Mn of at most 3.

33. The toner according to Claim 1, wherein the wax has such a molecular weight distribution as to
5 provide a number-average molecular weight (Mn) of 250 - 1000, a weight-average molecular weight (Mw) of 350 - 3000, and a ratio Mw/Mn of at most 2.5.

34. The toner according to Claim 1, wherein the
10 wax has a melting point of 70 - 155 °C.

35. The toner according to Claim 1, wherein the wax has a melting point of 75 - 140 °C.

15 36. The toner according to Claim 1, wherein the wax has a melt-viscosity at 160 °C of at most 500 mPa.s.

37. The toner according to Claim 1, wherein the
20 wax has a melt-viscosity at 140 °C of at most 500 mPa.s.

38. The toner according to Claim 1, wherein the wax is contained in 0.1 - 15 wt. parts per 100 wt.
25 parts of the binder resin.

39. The toner according to Claim 1, wherein the



-125-

wax is contained in 0.5 - 12 wt. parts per 100 wt. parts of the binder resin.

40. The toner according to Claim 1, which is a
5 magnetic toner containing a magnetic material as the colorant.

41. The toner according to Claim 40, wherein the
magnetic material comprise magnetic particles having a
10 number-average particle size of at most 2 μm .

42. The toner according to Claim 40, wherein the
magnetic material has magnetic particles as measured
by application of 7.96×10^2 kA/m including a coercive
15 force (Hc) of 1.6 - 23.9 kA/m, a saturation
magnetization (σ_s) of 50 - 200 Am^2/kg , and a residual
magnetization (σ_r) of 2 - 20 Am^2/kg .

43. The toner according to Claim 40, wherein the
20 magnetic toner contains 20 - 200 wt. parts of the
magnetic material per 100 wt. parts of the binder
resin.

44. The toner according to Claim 1, having a
25 weight-average particle size (D4) of 4 - 10 μm .

45. The toner according to Claim 1, containing



silica fine powder externally blended therewith.

46. An image forming method, comprising:

5 (1) a developing step of developing an electrostatic latent image on an image bearing member with a toner to form a toner image thereon,

(2) a transfer step of transferring the toner image formed on the image bearing member onto a recording material via or without via an intermediate
10 transfer member, and

(3) a fixing step of heat-fixing the toner image transferred to the recording material onto the recording material,

* wherein the toner comprises at least a binder
15 resin, a wax and a colorant,

and the toner exhibits visco-elastic properties including:

(a) a storage modulus G' (160°C) of 8.0×10^2 - 1.2×10^4 Pa at 160°C ,

20 (b) a loss modulus G'' (160°C) of 4.0×10^2 - 6.0×10^3 Pa at 160°C ,

(c) a loss tangent $\tan \delta$ (160°C) = G'' (160°C) / G' (160°C) of 0.1 - 1.5 at 160°C ,

(d) a storage modulus G' (190°C) of 6.0×10^2 - 1.6×10^4 Pa at 190°C ,

25 (e) a loss modulus G'' (190°C) of 2.0×10^2 - 4.0×10^3 Pa at 190°C ,



(f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.05 - 1.2 at 190°C ,

(g) G' (160°C)/ G' (190°C) = 0.5 - 2.0, and

(h) $\tan\delta$ (160°C) > $\tan\delta$ (190°C).

5

47. The method according to Claim 46, wherein in the developing step, the electrostatic latent image held on the image bearing member is developed with a layer of a mono-component developer comprising the toner carried in a thickness regulated by a developer layer thickness regulation means on a developer-carrying member disposed opposite to the image-bearing member.

15

48. The method according to Claim 47, wherein the monocomponent developer layer on the developer-carrying member is formed in a thickness that is smaller than a minimum gap between surfaces of the image-bearing member and the developer-carrying member at a developing region.

20

49. The method according to Claim 48, wherein in the developing step, the electrostatic image is developed under application of a bias voltage to the developer-carrying member.

25

50. The method according to Claim 49, wherein the



THIS SHEET HAS BEEN
REPLACED

-128-

bias voltage comprises an alternating voltage
superposed with a direct current voltage.

51. The method according to Claim 46, wherein the
5 image-bearing member comprises an electrophotographic
photosensitive member.

52. The method according to Claim 51, wherein the
image-bearing member comprises a photoconductor
10 selected from the group consisting of amorphous
silicon, organic photoconductor and selenium.

53. The method according to Claim 46, wherein the
image bearing member comprises a photoconductor member
15 comprises a photoconductor selected from amorphous
silicon and organic photoconductor.

54. The method according to Claim 46, operated at
a process speed of at least 200 mm/sec.

20

55. The method according to Claim 46, wherein the
toner is a toner according to any of Claims 2 - 45.

25

This Sheet Has Been Replaced



ABSTRACT OF THE DISCLOSURE

A toner exhibiting good fixing performances even at a high process speed is formed of a binder resin, a wax and a colorant. The toner is especially characterized by visco-elastic properties including:

5 (a) a storage modulus G' (160°C) of $8.0 \times 10^2 - 1.2 \times 10^4$ Pa at 160°C , (b) a loss modulus G'' (160°C) of $4.0 \times 10^2 - 6.0 \times 10^3$ Pa at 160°C , (c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.5 at 160°C ,

10 (d) a storage modulus G' (190°C) of $6.0 \times 10^2 - 1.6 \times 10^4$ Pa at 190°C , (e) a loss modulus G'' (190°C) of $2.0 \times 10^2 - 4.0 \times 10^3$ Pa at 190°C , (f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.05 - 1.2 at 190°C ,

15 (g) $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C}) = 0.5 - 2.0$, and (h) $\tan\delta (160^{\circ}\text{C}) > \tan\delta (190^{\circ}\text{C})$.

20

25

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED


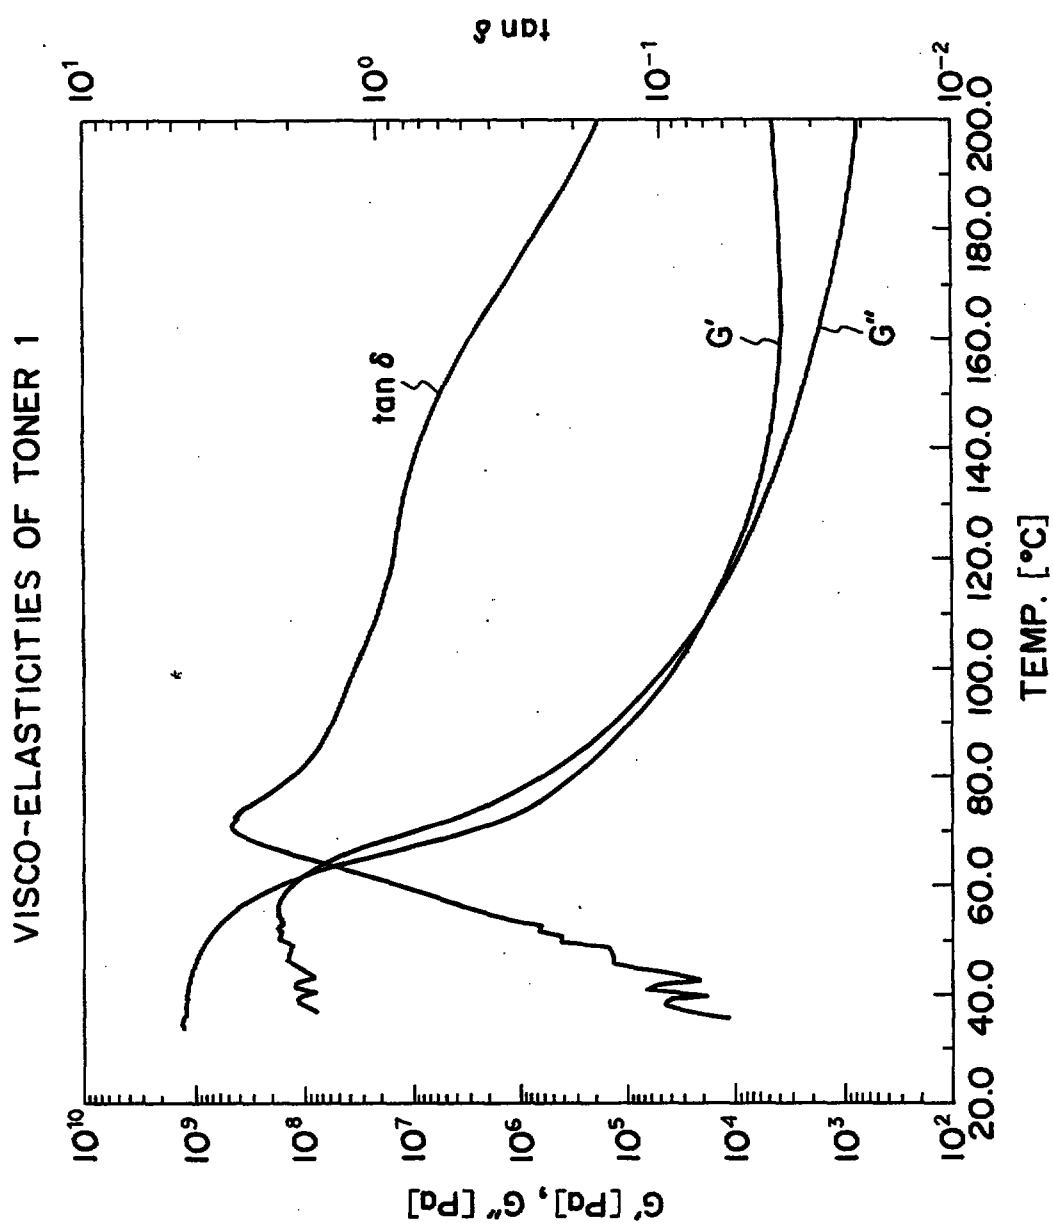


FIG. 1

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

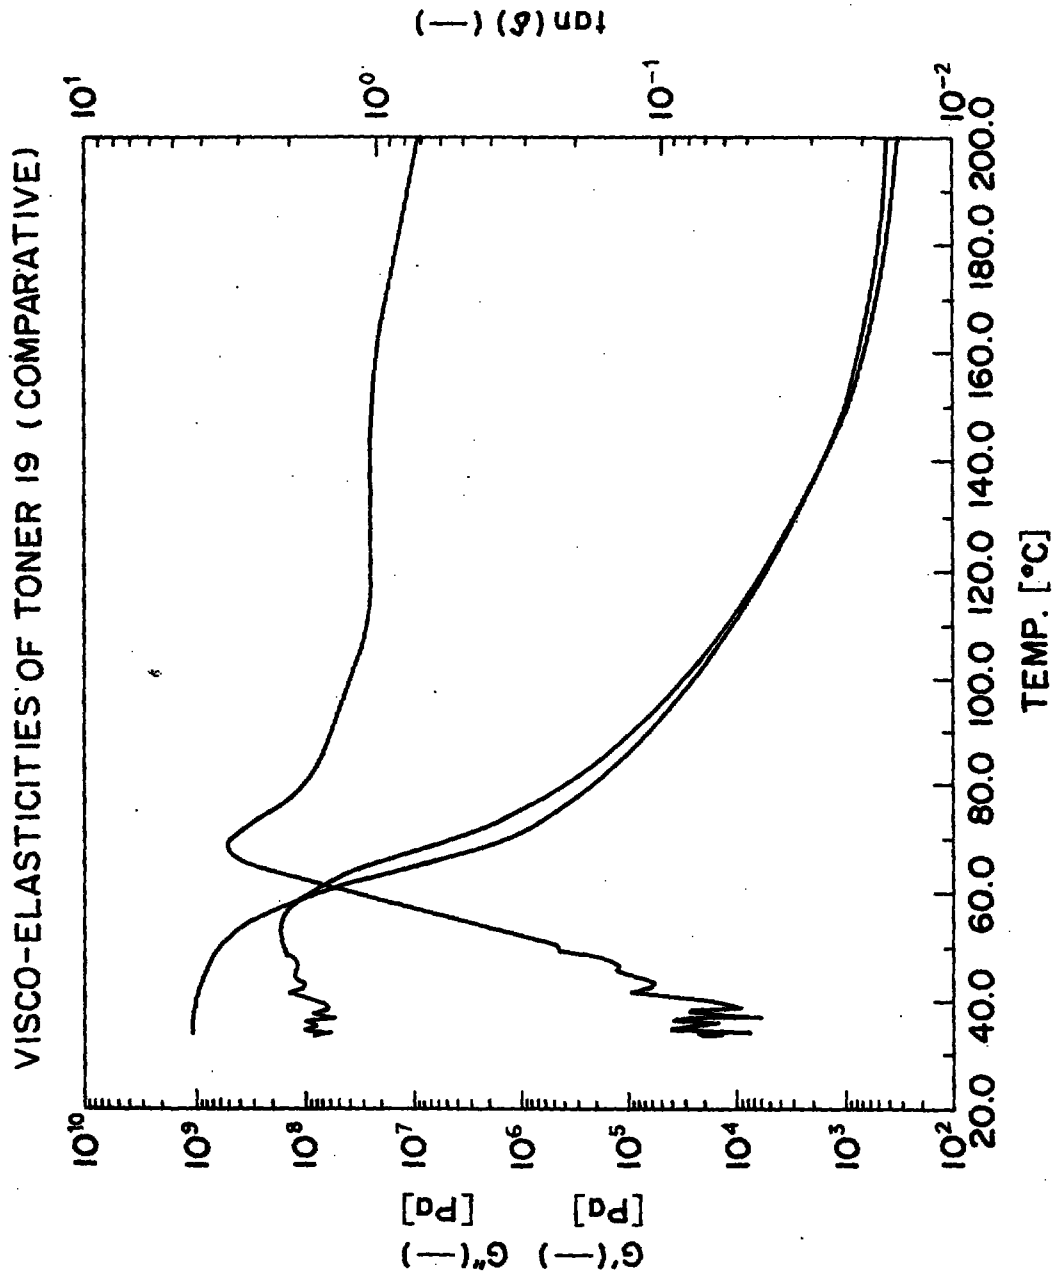


FIG. 2

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

GPC CHART (TONER OF EXAMPLE 1)

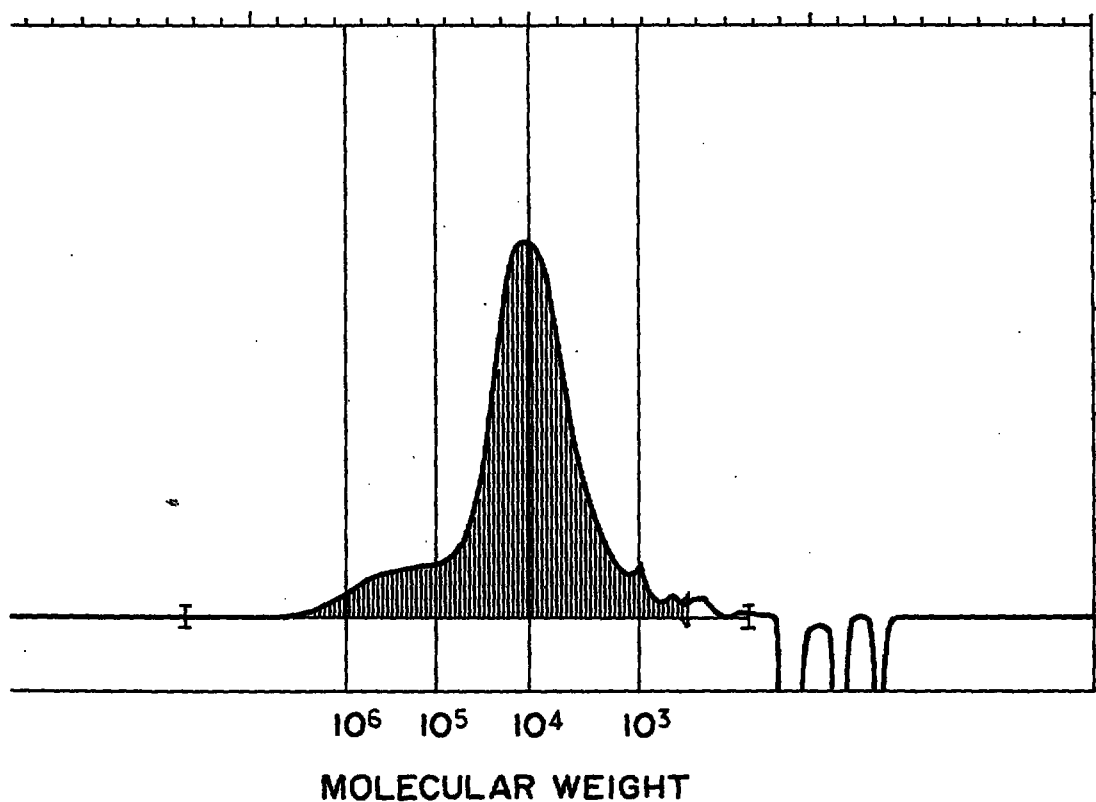


FIG. 3


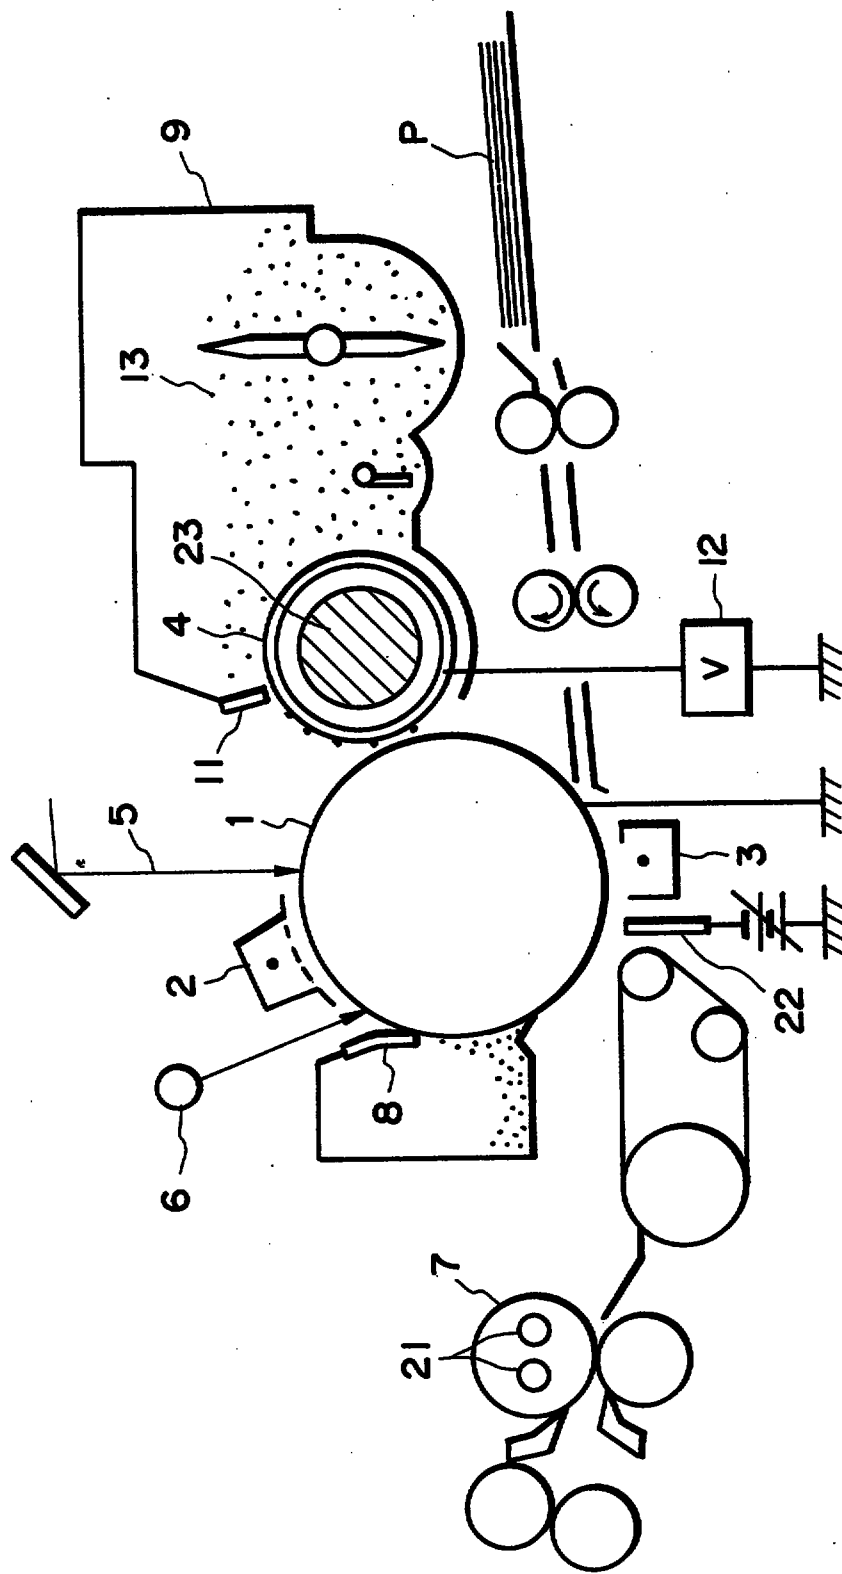


FIG. 4

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

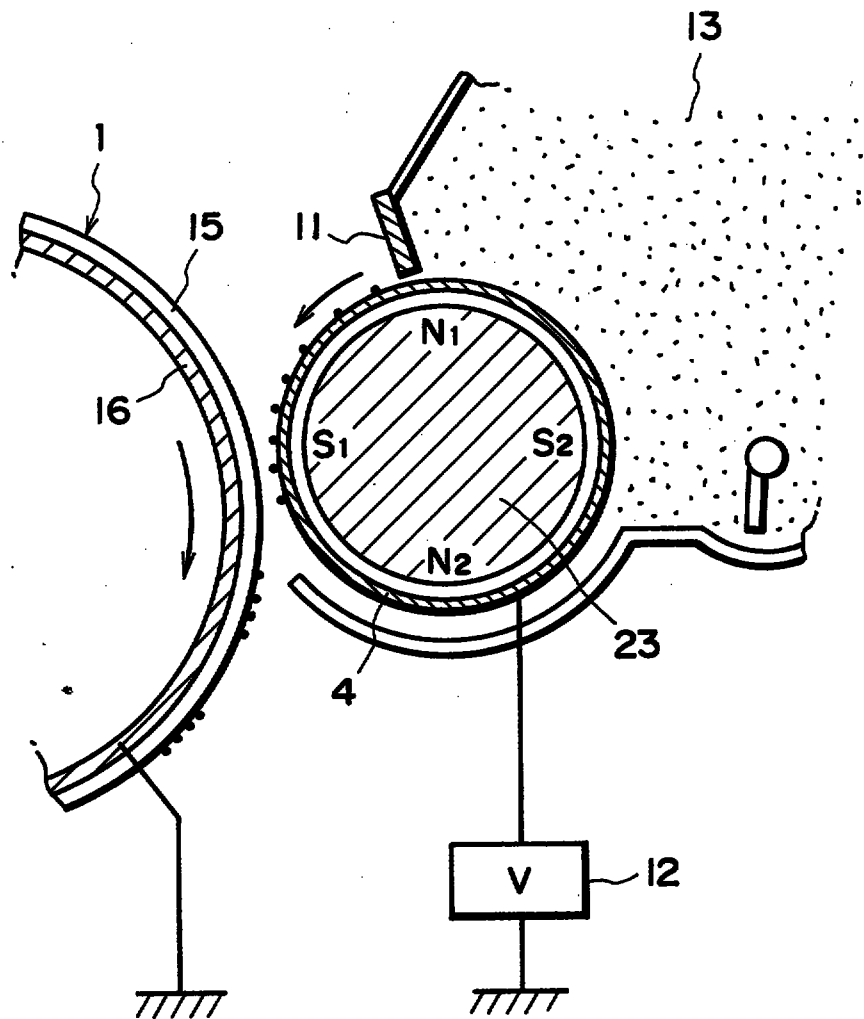


FIG. 5

RESEARCH

THIS SHEET HAS BEEN
REPLACED

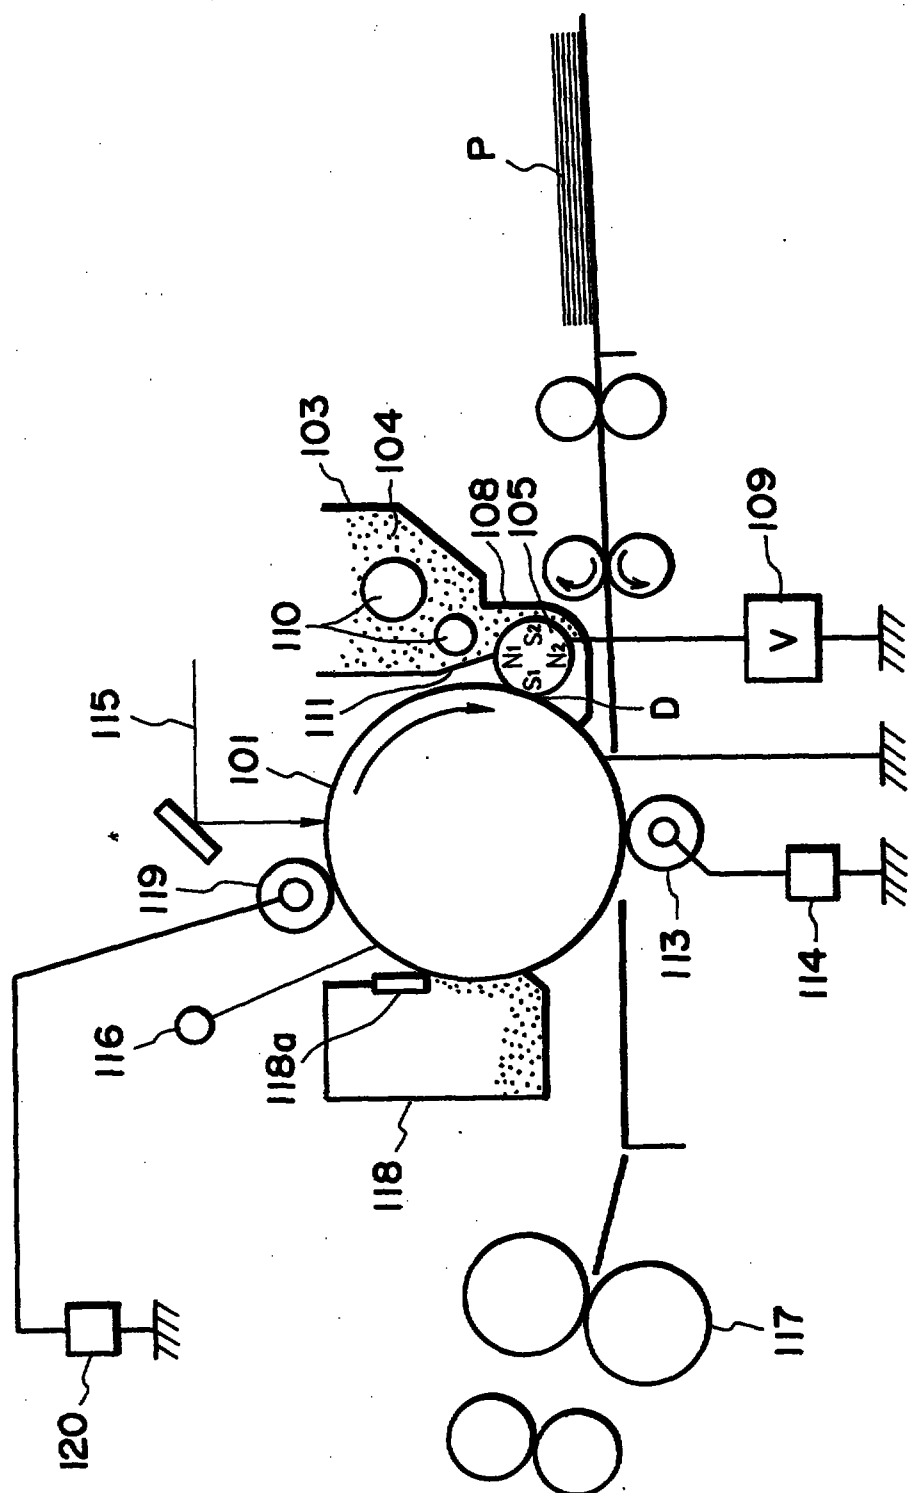


Fig. 6



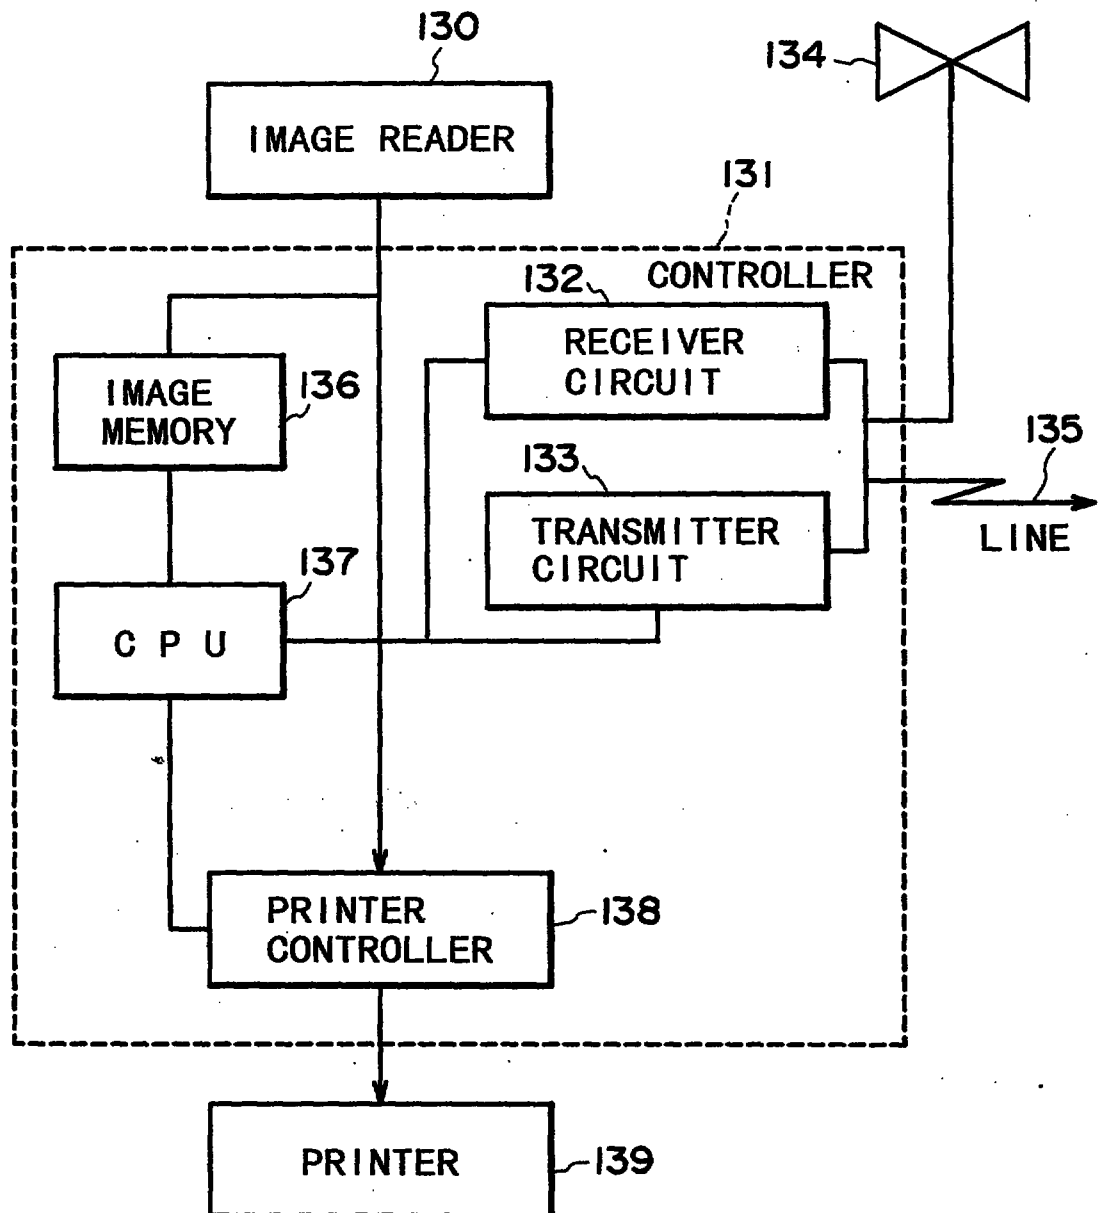


FIG. 7

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

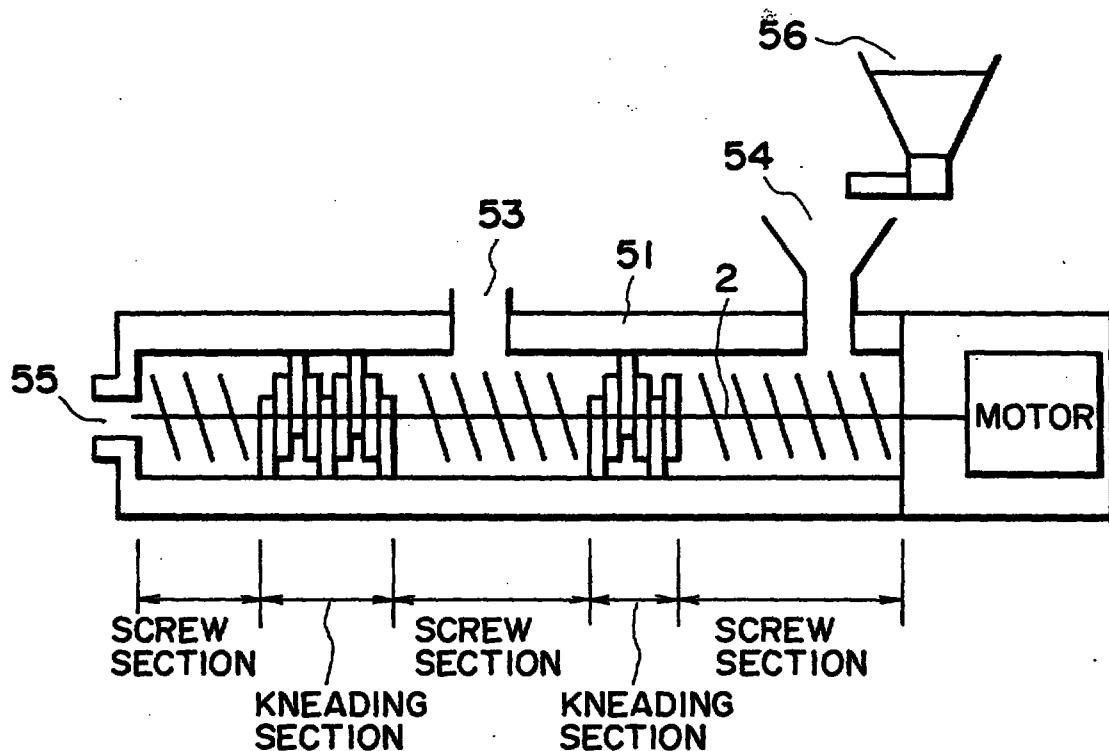

51: HEATING CYLINDER
52: PADDLE
53: VENT

54: SUPPLY PORT
55: EXTRUSION PORT
56: FEED HOPPER

FIG. 8

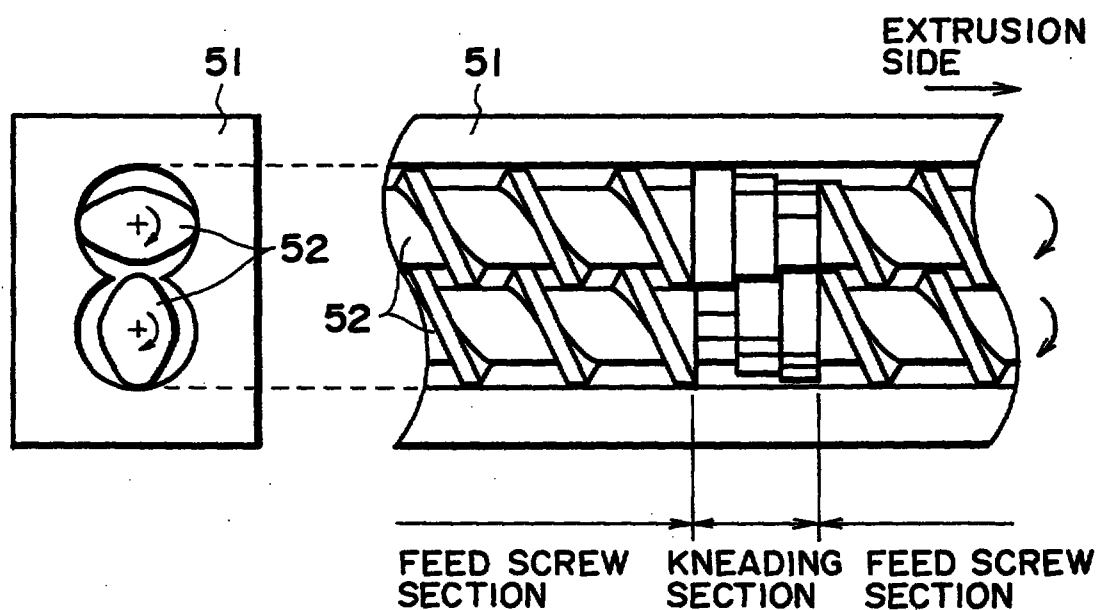


FIG. 9

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



(S)

FIG. 10



(R)

FIG. 11



(W)


FIG. 12



(L)


FIG. 13

This Sheet Has Been Replaced

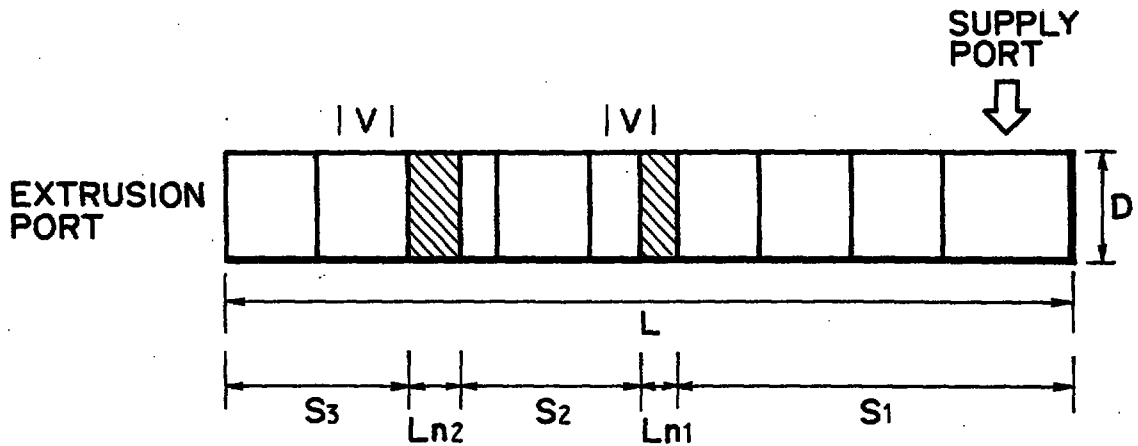

L : PADDLE ENTIRE LENGTH
 D : SCREW DIAMETER
 S_1, S_2, S_3 : SCREW SECTION
 L_{n1}, L_{n2} : KNEADING SECTION
 V : VENT

FIG. 14

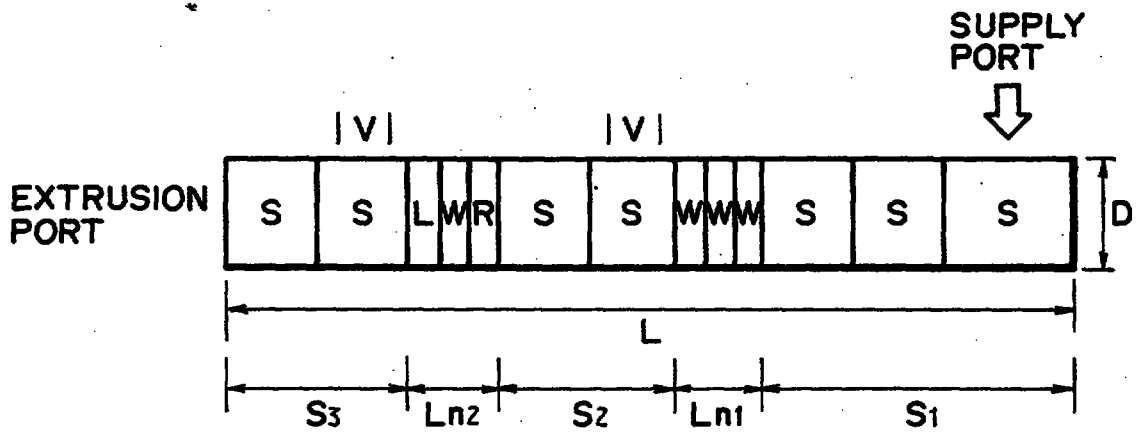


L : PADDLE ENTIRE LENGTH
 D : SCREW DIAMETER
 S_1, S_2, S_3 : SCREW SECTION
 L_{n1}, L_{n2} : KNEADING SECTION
 V : VENT

FIG. 15

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

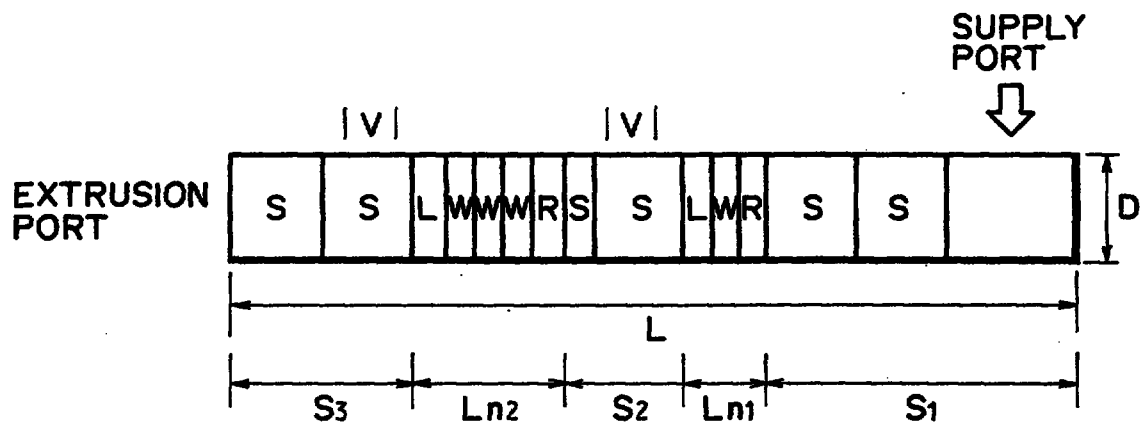

L : PADDLE ENTIRE LENGTH
D : SCREW DIAMETER
S₁, S₂, S₃ : SCREW SECTION
L_{n1}, L_{n2} : KNEADING SECTION
V : VENT

FIG. 16

REPLACEMENT SHEET

12 MAR 1999

-129-

TONER AND IMAGE FORMING METHODABSTRACT OF THE DISCLOSURE

A toner exhibiting good fixing performances even at a high process speed is formed of a binder resin, a wax and a colorant. The toner is especially

5 characterized by visco-elastic properties including:

(a) a storage modulus G' (160°C) of $8.0 \times 10^2 - 1.2 \times 10^4$ Pa at 160°C , (b) a loss modulus G'' (160°C) of $4.0 \times 10^2 - 6.0 \times 10^3$ Pa at 160°C , (c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.5 at 160

10 $^{\circ}\text{C}$, (d) a storage modulus G' (190°C) of $6.0 \times 10^2 - 1.6 \times 10^4$ Pa at 190°C , (e) a loss modulus G'' (190°C) of $2.0 \times 10^2 - 4.0 \times 10^3$ Pa at 190°C , (f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.05 - 1.2 at 190°C , (g) G' (160°C)/ G' (190°C) = 0.5 - 2.0,

15 and (h) $\tan\delta$ (160°C) > $\tan\delta$ (190°C).

No figure suggested

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

1 2 MAR 1999

- 1 -

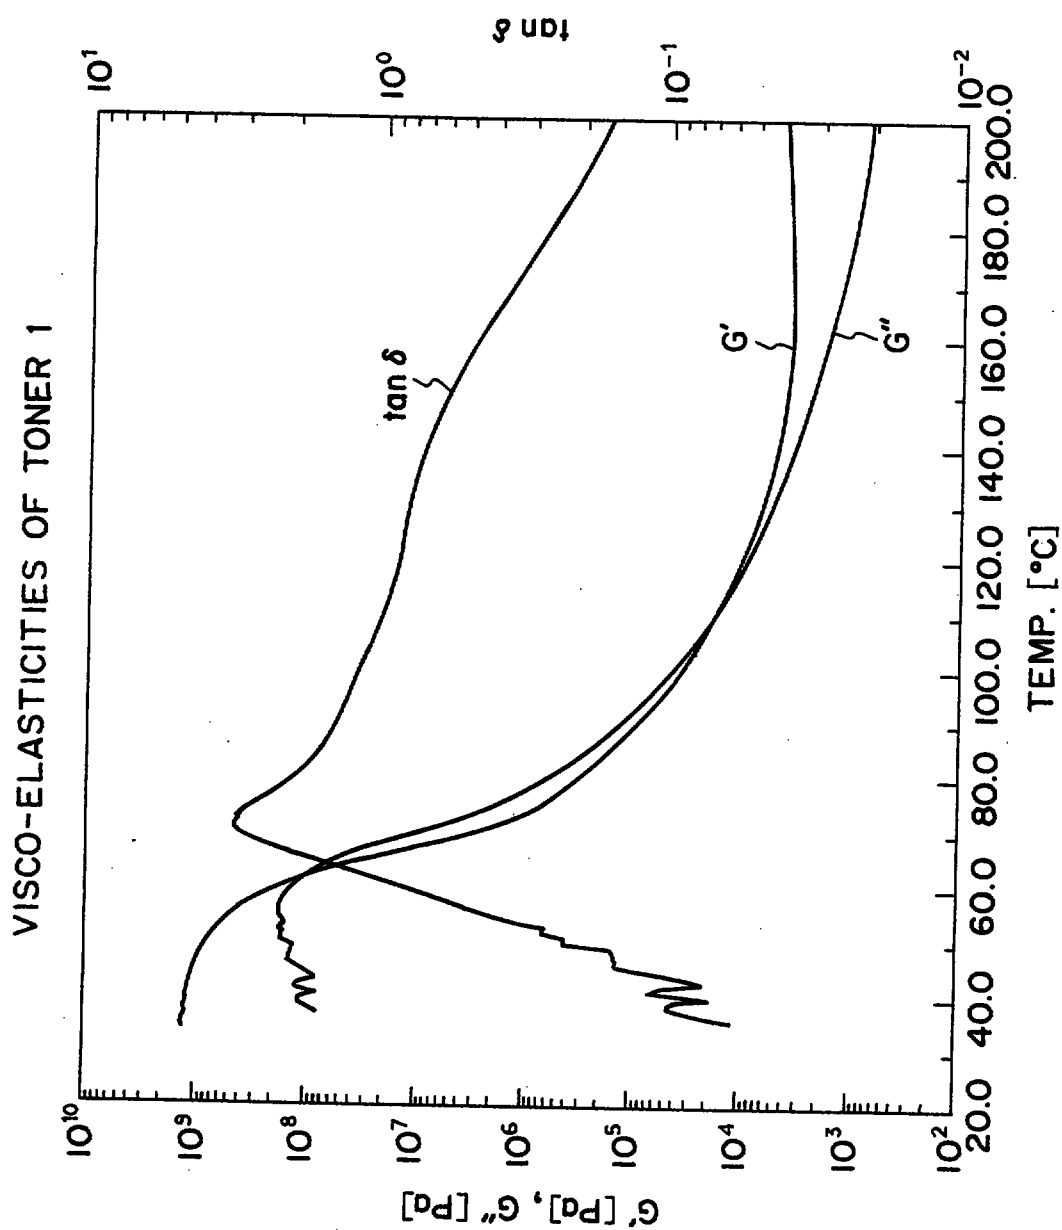


FIG. 1

1 2 MAR 1999

- 2 -

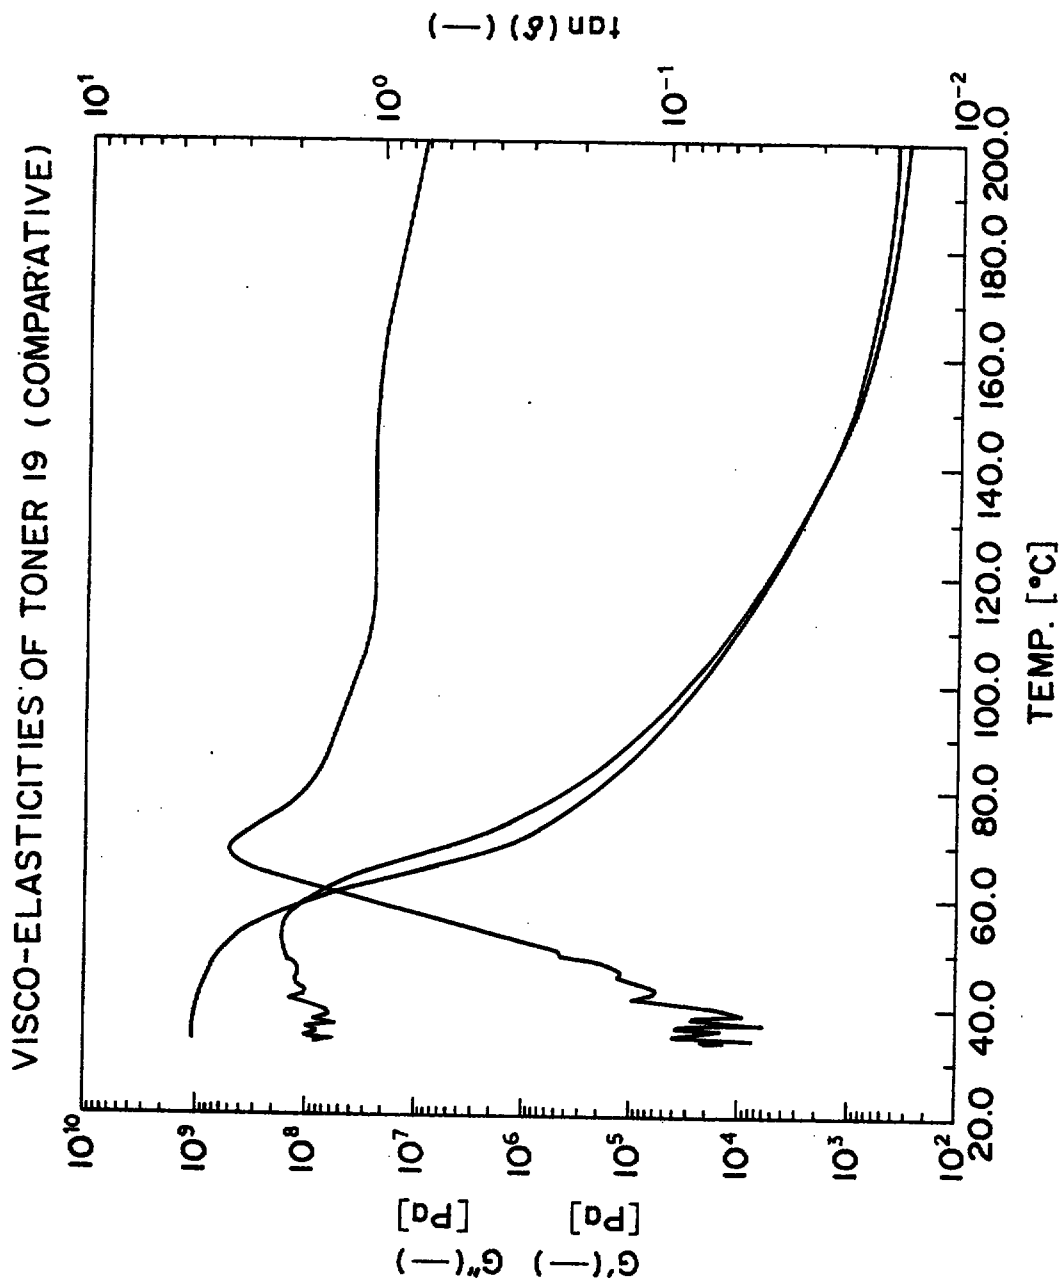


FIG. 2

1 2 MAR 1999

GPC CHART (TONER OF EXAMPLE 1)

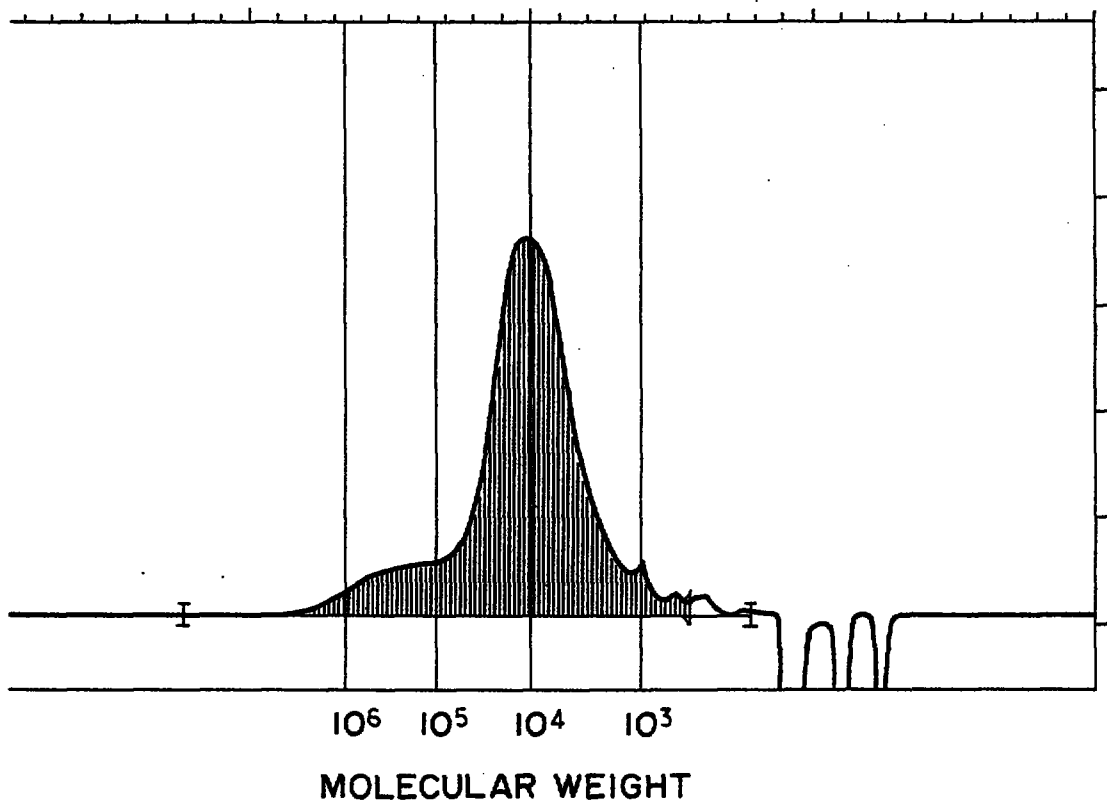


FIG. 3

1 2 MAR 1999

-4-

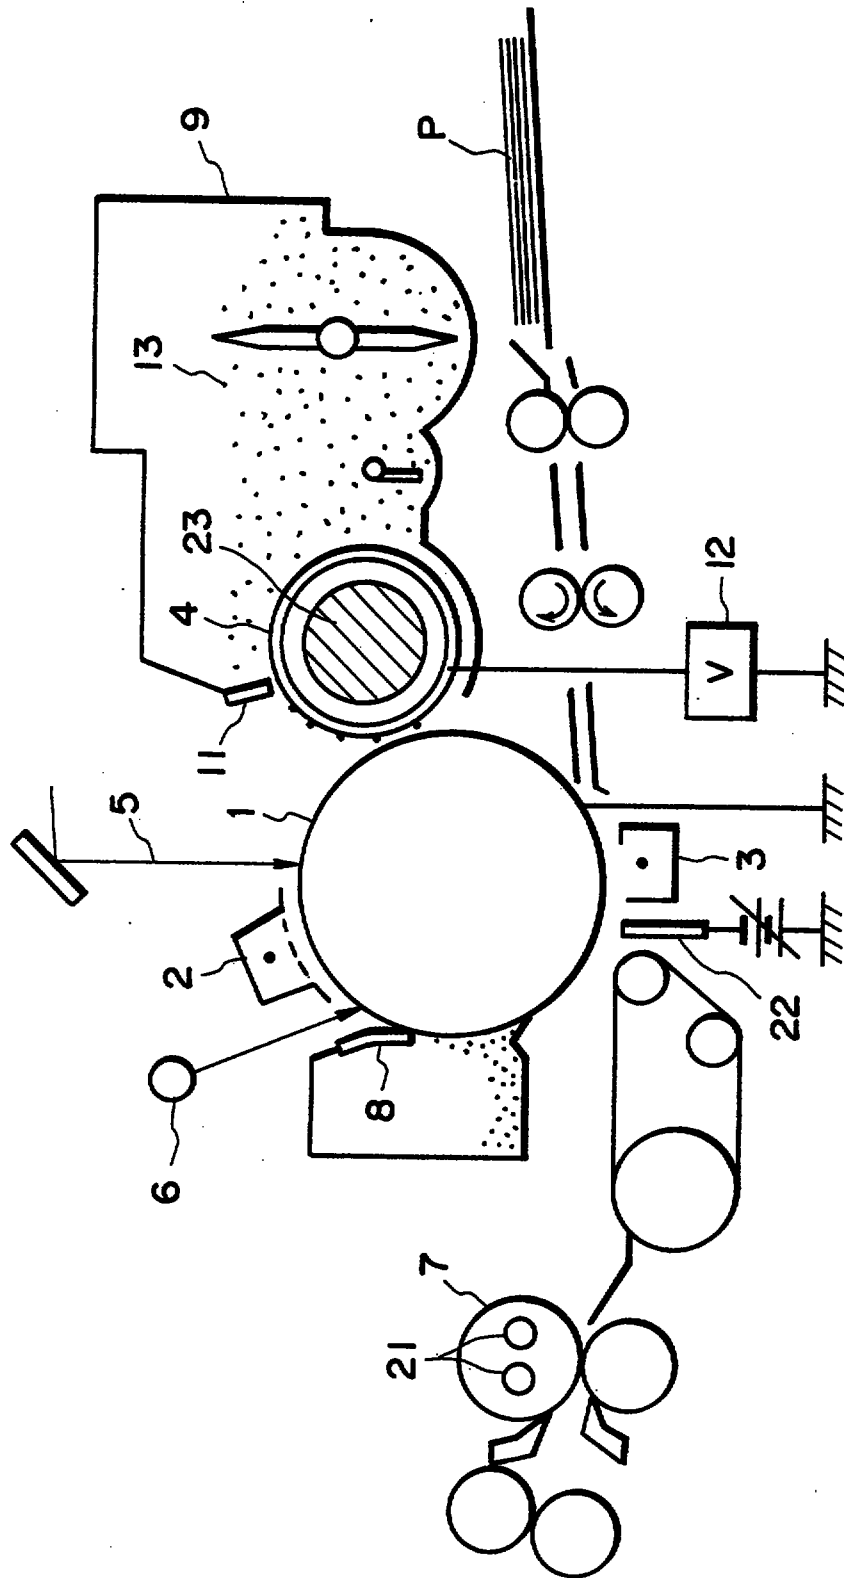


FIG. 4

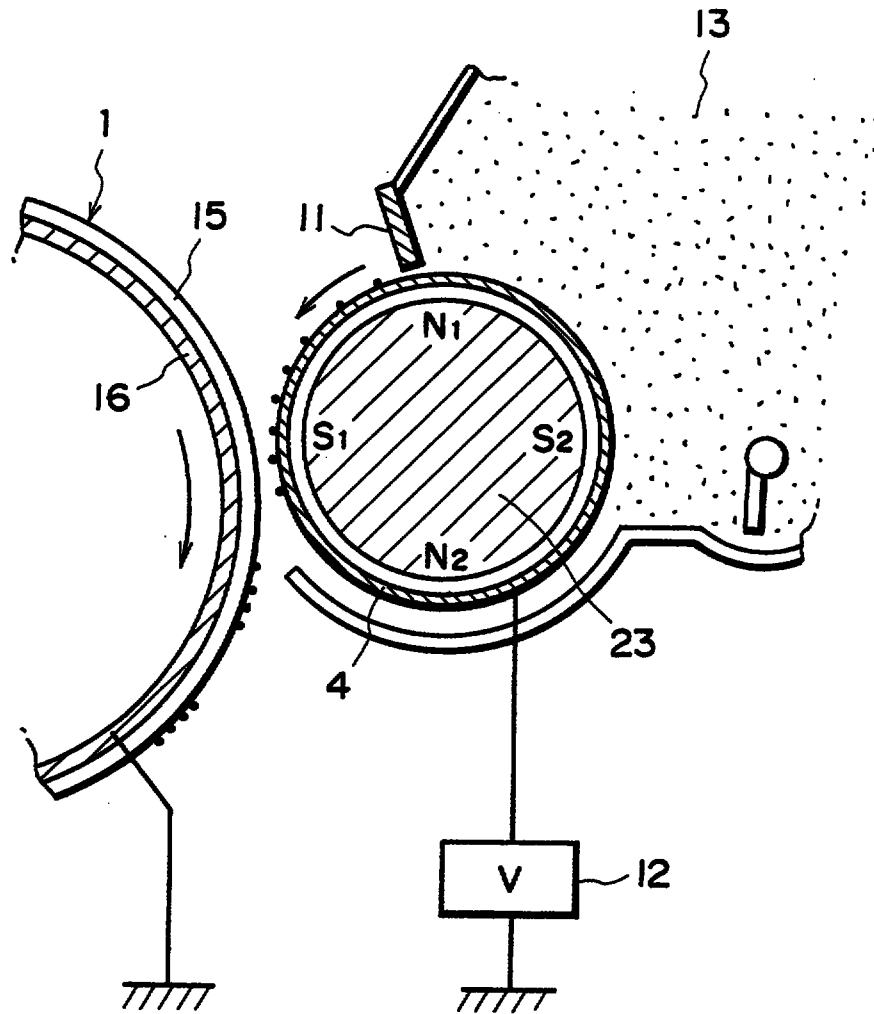


FIG. 5

- 6 -

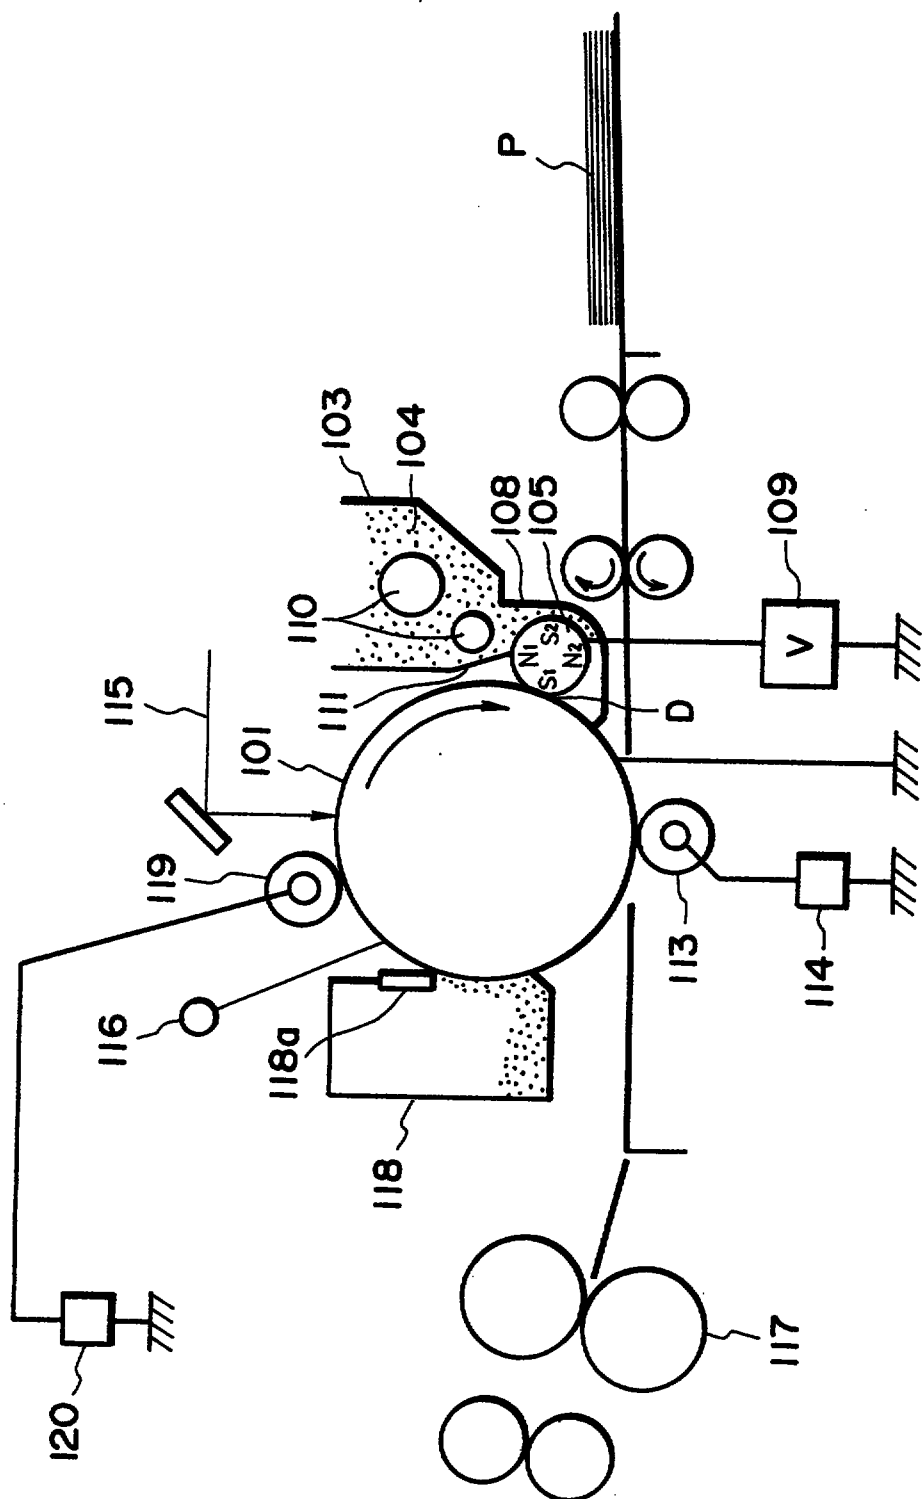


FIG. 6

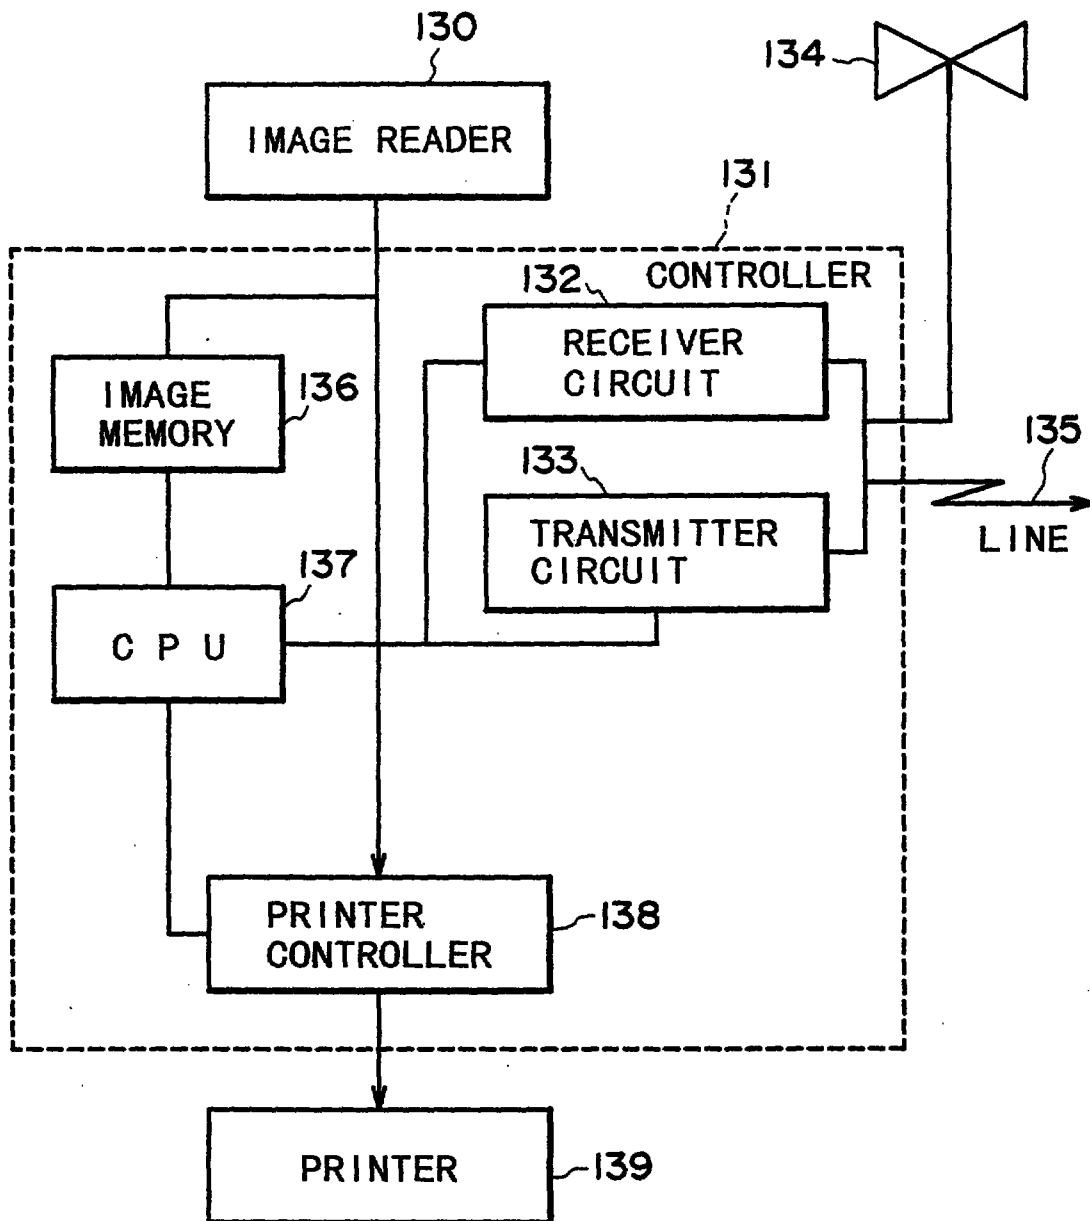


FIG. 7

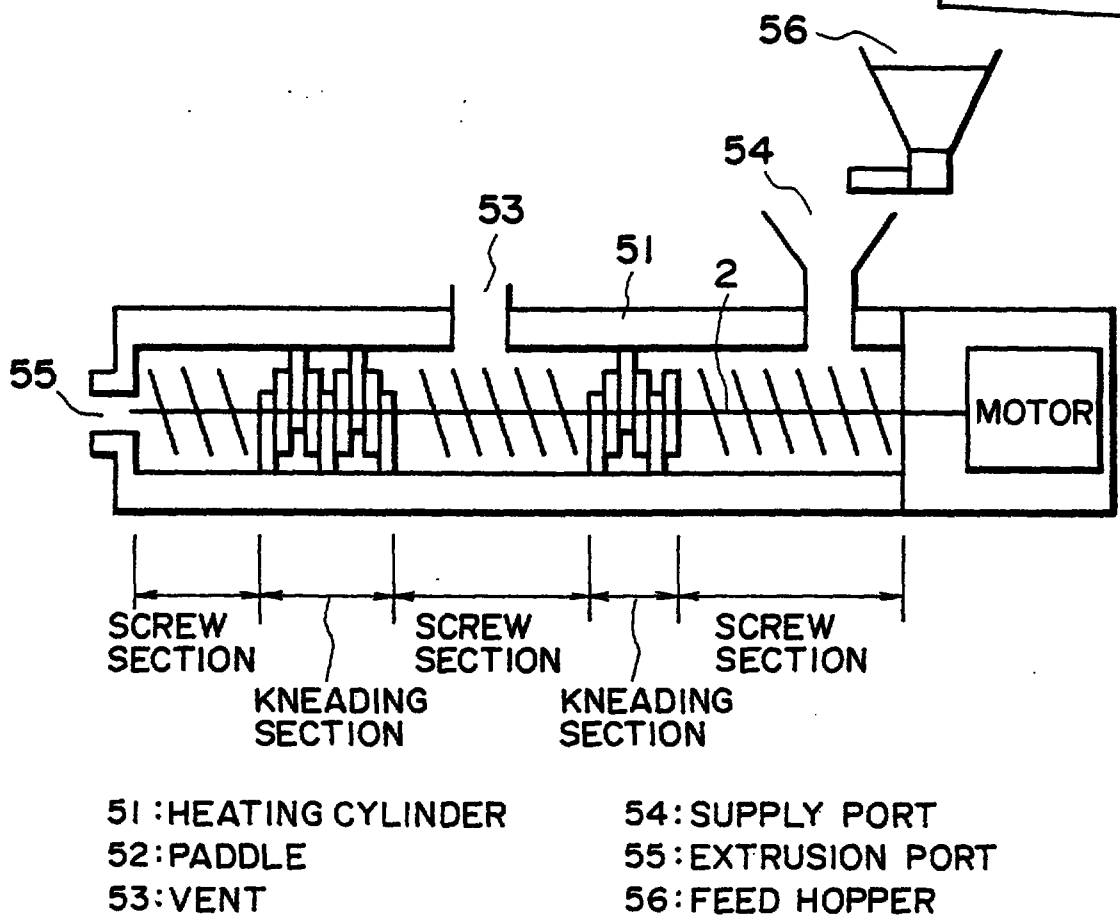


FIG. 8


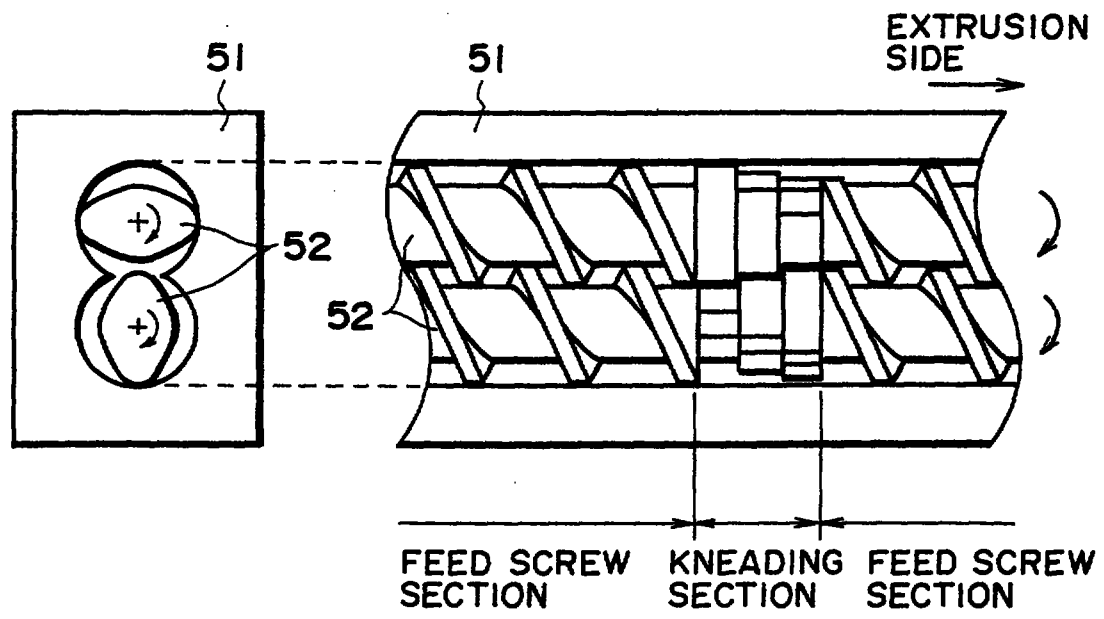


FIG. 9



(S)
FIG. 10



(R)
FIG. 11




(W)
FIG. 12



(L)
FIG. 13


1 2 MAR 1999

- 10 -

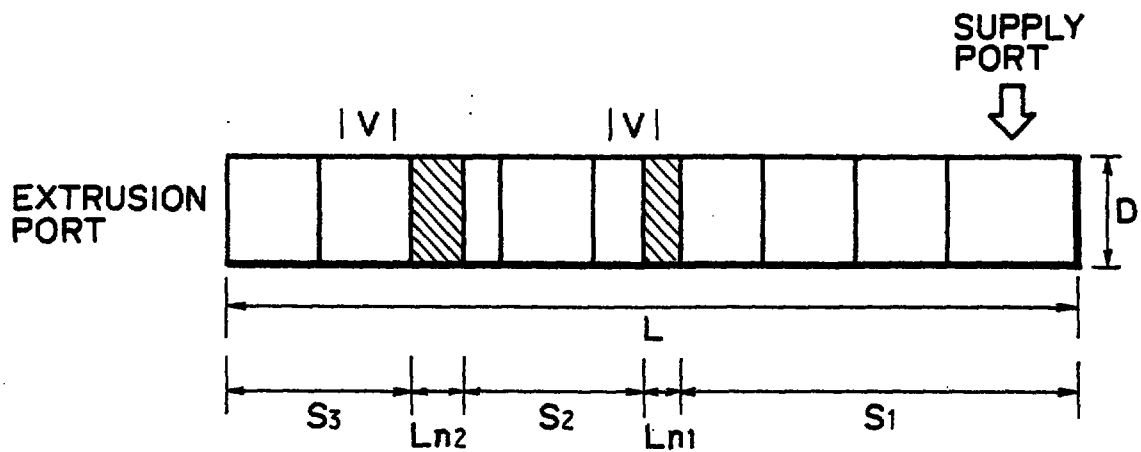



L : PADDLE ENTIRE LENGTH
 D : SCREW DIAMETER
 S₁, S₂, S₃ : SCREW SECTION
 L_{n1}, L_{n2} : KNEADING SECTION
 V : VENT

FIG. 14

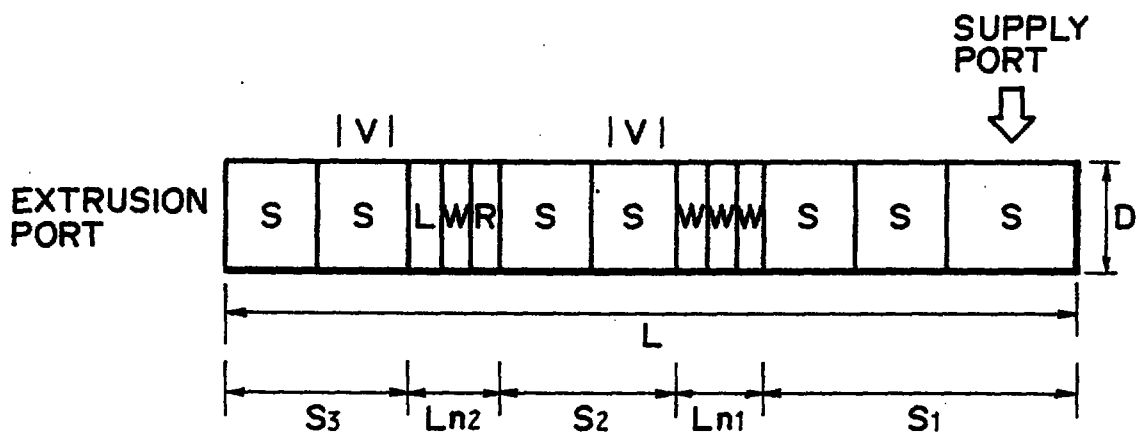

L : PADDLE ENTIRE LENGTH
 D : SCREW DIAMETER
 S₁, S₂, S₃ : SCREW SECTION
 L_{n1}, L_{n2} : KNEADING SECTION
 V : VENT

FIG. 15

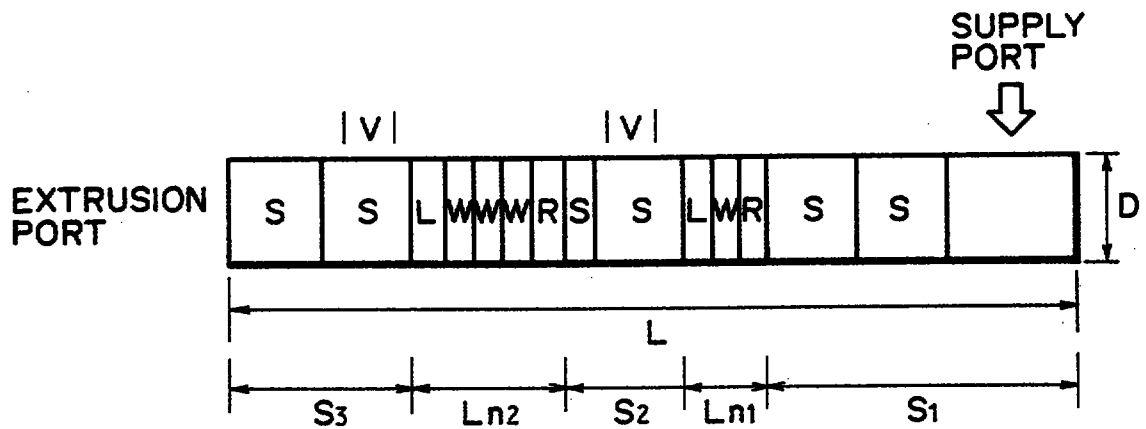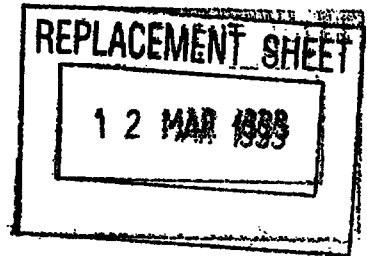

L : PADDLE ENTIRE LENGTH
 D : SCREW DIAMETER
 S_1, S_2, S_3 : SCREW SECTION
 L_{n1}, L_{n2} : KNEADING SECTION
 V : VENT

FIG. 16



17 MAR 1999

WHAT IS CLAIMED IS:

1. A toner comprising: at least a binder resin,
a wax and a colorant,

5 wherein the toner exhibits visco-elastic
properties including:

(a) a storage modulus G' (160°C) of 8.0×10^2
- 1.2×10^4 Pa at 160°C ,

(b) a loss modulus G'' (160°C) of 4.0×10^2 -
 6.0×10^3 Pa at 160°C ,

10 (c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C) / G' (160°C) of 0.1 - 1.5 at 160°C ,

(d) a storage modulus G' (190°C) of 6.0×10^2
- 1.0×10^4 Pa at 190°C ,

15 (e) a loss modulus G'' (190°C) of 2.0×10^2 -
 4.0×10^3 Pa at 190°C ,

(f) a loss tangent $\tan\delta$ (190°C) = G'' (190°C) / G' (190°C) of 0.05 - 1.2 at 190°C ,

(g) G' (160°C) / G' (190°C) = 0.5 - 2.0, and

(h) $\tan\delta$ (160°C) > $\tan\delta$ (190°C).

20

2. The toner according to Claim 1, having (a) a
storage modulus G' (160°C) of 1.0×10^3 - 1.0×10^4 Pa at
 160°C ,

25 (b) a loss modulus G'' (160°C) of 5.0×10^2 -
 5.0×10^3 Pa at 160°C , and

(c) a loss tangent $\tan\delta$ (160°C) = G'' (160°C) / G' (160°C) of 0.1 - 1.0 at 160°C .



17 MAR 1999


6. The toner according to Claim 1, having (g) a ratio $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C})$ of 0.6 - 1.8.

7. The toner according to Claim 1, having (g) a ratio $G' (160^{\circ}\text{C})/G' (190^{\circ}\text{C})$ of 0.7 - 1.5.

8. The toner according to Claim 1, containing a THF-soluble content which has such a molecular weight distribution based on a GPC chromatogram as to provide a main peak in a molecular weight region of 3×10^3 - 4×10^4 and contain 1.0 - 5.0 % (by area on the chromatogram) of components in a molecular weight range of 1×10^5 - 2×10^5 , 1.0 - 5.0 % of components in a molecular weight range of 2×10^5 - 5×10^5 , 0.5 - 5.0 % of components in a molecular weight range of 5×10^5 - 1×10^6 , and 0.2 - 6.0 % of components in a molecular weight range of 1×10^6 or larger.

9. The toner according to Claim 1, wherein the binder and the wax contain a THF-insoluble content of 1 - 50 wt. %.

10. The toner according to Claim 1, having such a molecular weight distribution based on a GPC chromatogram as to provide a main peak in a molecular weight region of 3×10^3 - 4×10^4 and contain 1.0 - 5.0 % (by area on the chromatogram) of components in a

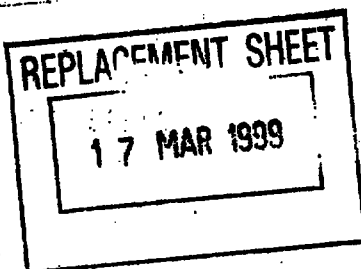

molecular weight range of 1×10^5 - 2×10^5 , 1.0 - 5.0 %
of components in a molecular weight range of 2×10^5 -
 5×10^5 , 0.5 - 5.0 % of components in a molecular weight
range of 5×10^5 - 1×10^6 , and 0.2 - 6.0 % of components
5 in a molecular weight range of 1×10^6 or larger, and
the toner containing 1 - 50 wt. % of the binder and
the wax as a THF-insoluble content.

11. The toner according to Claim 1, wherein the
10 binder resin includes at least one type of
crosslinkage formed through crosslinking reactions
selected from the group consisting of:
copolymerization using a polyfunctional vinyl monomer
having two or more vinyl groups; polycondensation
15 using monomers, at least one of which is
polyfunctional; crosslinking between functional groups
of polymer molecules having a functional group via a
reactive compound capable of reacting with the
functional group; reaction between a first polymer
20 having a functional group and a second polymer having
a functional group reactive with the functional group
of the first polymer; crosslinking by polycondensation
of addition polymer(s); and crosslinking by addition
polymerization of condensation polymer(s).

25

12. The toner according to Claim 1, wherein the
binder resin includes a first type of crosslinkage



17 MAR 1999

formed during production of the binder resin, and a second type of crosslinkage formed during melt-kneading of the binder resin with other toner ingredients for toner production.

5


13. The toner according to Claim 1, wherein the binder resin includes a first type of crosslinkage formed during production of the binder resin, and a during melt-kneading of the binder resin with other toner ingredients for toner production, and a second type of crosslinkage formed during the melt-kneading of the binder resin with other toner ingredients for toner production.

14. The toner according to Claim 1, wherein the binder resin has at least two types of crosslinkages formed by subjecting a resin having a first type of crosslinkage through a first crosslinking reaction to a second crosslinking reaction.

20

15. The toner according to Claim 1, wherein the binder resin has been obtained through a first crosslinking by reacting a resin having an acid group with a reactive compound or polymer, and then a second crosslinking to provide a crosslinkage via a second reactive compound or polymer.

25



5 copolymer including glycidyl group-containing vinyl monomer units and styrene monomer units, and (ii) an acid group-containing copolymer including acid group-containing vinyl monomer units and styrene monomer units.

23. The toner according to Claim 22, wherein the glycidyl group-containing copolymer has a weight-average molecular weight of $4 \times 10^3 - 10^5$.

10

24. The toner according to Claim 22, wherein said glycidyl group-containing monomer is selected from the group consisting of glycidyl acrylate, glycidyl methacrylate, β -methylglycidyl acrylate, β -methylglycidyl methacrylate, allyl glycidyl ether, and allyl β -methylglycidyl ether.

15

25. The toner according to Claim 21, wherein said glycidyl compound is used in 0.05 - 10 equivalents per mol of the acid groups.

20

26. The toner according to Claim 21, wherein said metal salt or metal complex includes a mono-valent metal ion selected from the group consisting of Na^+ , Li^+ , K^+ , Cs^+ , Ag^+ , Hg^+ and Cu^+ .

25

27. The toner according to Claim 21, wherein said



-123-

REPLACEMENT SHEET

17 MAR 1999

metal salt or metal complex includes a divalent metal ion selected from the group consisting of Be^{2+} , Ba^{2+} , Mg^{2+} , Ca^{2+} , Hg^{2+} , Sn^{2+} , Pb^{2+} , Mn^{2+} , Fe^{2+} , Ce^{2+} , Ni^{2+} and Zn^{2+} .

5

28. The toner according to Claim 21, wherein said metal salt or metal complex includes a trivalent metal ion selected from the group consisting of Al^{3+} , Sc^{3+} , Fe^{3+} , V^{3+} , Co^{3+} , Ce^{3+} , Ni^{3+} , Cr^{3+} and Y^{3+} .

10

29. The toner according to Claim 21, wherein said metal salt or metal complex includes a tetravalent metal ion of Ti^{4+} or Zr^{4+} .

15

30. The toner according to Claim 1, wherein the binder resin includes a crosslinkage formed by a crosslinking vinyl monomer having two or more polymerizable double bonds.

20

31. The toner according to Claim 30, wherein said crosslinking vinyl monomer has been used in 0.01 - 5.0 wt. parts per 100 wt. parts of other vinyl monomers.

25

32. The toner according to Claim 1, wherein the wax has such a molecular weight distribution as to provide a number-average molecular weight (M_n) of 200 - 1200, a weight-average molecular weight (M_w) of 300



-128-

REPLACEMENT SHEET

17 MAR 1999

bias voltage comprises an alternating voltage
superposed with a direct current voltage.

51. The method according to Claim 46, wherein the
5 image-bearing member comprises an electrophotographic
photosensitive member.

52. The method according to Claim 51, wherein the
image-bearing member comprises a photoconductor
10 selected from the group consisting of amorphous
silicon, organic photoconductor and selenium.

53. The method according to Claim 46, wherein the
image bearing member comprises a photoconductor selected
15 from amorphous silicon and organic photoconductor.

54. The method according to Claim 46, operated at
a process speed of at least 200 mm/sec.
20

55. The method according to Claim 46, wherein the
toner is a toner according to any of Claims 2 - 45.
25

TONER AND IMAGE FORMING METHOD

ABSTRACT OF THE DISCLOSURE

A toner exhibiting good fixing performances even at a high process speed is formed of a binder resin, a wax and a colorant. The toner is especially characterized by visco-elastic properties including:

5 (a) a storage modulus G' (160°C) of $8.0 \times 10^2 - 1.2 \times 10^4$ Pa at 160°C , (b) a loss modulus G'' (160°C) of $4.0 \times 10^2 - 6.0 \times 10^3$ Pa at 160°C , (c) a loss tangent $\tan \delta$ (160°C) = G'' (160°C)/ G' (160°C) of 0.1 - 1.5 at 160°C ,

10 (d) a storage modulus G' (190°C) of $6.0 \times 10^2 - 1.0 \times 10^4$ Pa at 190°C , (e) a loss modulus G'' (190°C) of $2.0 \times 10^2 - 4.0 \times 10^3$ Pa at 190°C , (f) a loss tangent $\tan \delta$ (190°C) = G'' (190°C)/ G' (190°C) of 0.05 - 1.2 at 190°C , (g) G' (160°C)/ G' (190°C) = 0.5 - 2.0,

15 and (h) $\tan \delta$ (160°C) > $\tan \delta$ (190°C).

No figure suggested

20

25