

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号
WO 2021/233191 A1

(43) 国际公布日
2021 年 11 月 25 日 (25.11.2021)

(51) 国际专利分类号:
H04W 36/00 (2009.01)

(21) 国际申请号: PCT/CN2021/093513

(22) 国际申请日: 2021 年 5 月 13 日 (13.05.2021)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202010437690.2 2020 年 5 月 21 日 (21.05.2020) CN

(71) 申请人: 华为技术有限公司 (HUAWEI TECHNOLOGIES CO., LTD.) [CN/CN]; 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。

(72) 发明人: 严乐 (YAN, Le); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong

518129 (CN)。耿婷婷 (GENG, Tingting); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。

(74) 代理人: 北京同达信恒知识产权代理有限公司 (TDIP & PARTNERS); 中国北京市西城区裕民路 18 号北环中心 A 座 2002, Beijing 100029 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL,

(54) Title: COMMUNICATION METHOD AND APPARATUS

(54) 发明名称: 一种通信方法及装置

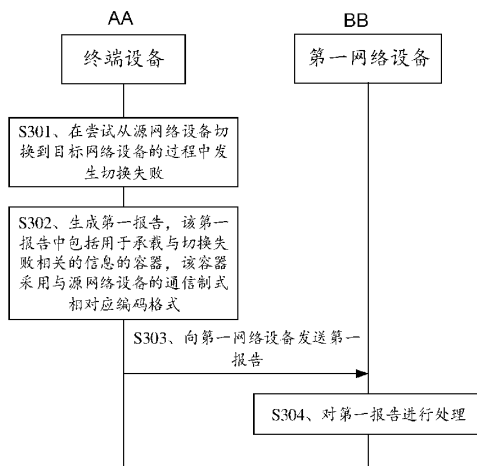


图 3

- S301 A handover failure occurs in an attempt to perform handover from a source network device to a target network device
- S302 Generate a first report, wherein the first report comprises a container for carrying at least one piece of information related to the handover failure, and the container uses an encoding format corresponding to a communication standard of the source network device
- S303 Sending the first report to a first network device
- S304 Process the first report
- AA Terminal device
- BB First network device

(57) Abstract: A communication method and apparatus. The method comprises: in a handover scenario involving different communication standards, after a handover failure occurs in an attempt performed by a terminal device to perform handover from a source network device to a target network device, the terminal device generating a first report, and sending the same to a first network device, wherein the first report comprises a container for carrying at least one piece of information related to the handover failure, and the container uses an encoding format corresponding to a communication standard of the source network device. The information related to the handover failure recorded by the terminal device is sent to the source network device. Therefore, the encoding format used by the container in the first report for carrying the information related to the handover failure is consistent with the communication standard of the source network device, such that after receiving the container, the source network device can easily and quickly acquire, by means

[见续页]

ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, WS, ZA, ZM, ZW。

- (84) 指定国 (除另有指明, 要求每一种可提供的地区
保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,
NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM,
AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU,
IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,
RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

- 包括国际检索报告 (条约第21条(3))。

of parsing, the information related to the handover failure contained therein, thereby effectively reducing implementation complexity of the source network device and improving network operation efficiency.

(57) 摘要: 一种通信方法及装置, 该方法包括: 在跨通信制式的切换场景中, 终端设备在尝试从源网络设备切换到目标网络设备的过程中发生切换失败后, 可生成并向第一网络设备发送第一报告, 该第一报告中包括用于承载与所述切换失败相关的至少一项信息的容器, 该容器采用与源网络设备的通信制式相对应的编码格式。由于终端设备记录的与切换失败相关的信息会发送给源网络设备, 因此, 该第一报告中用于承载与切换失败相关的信息的容器采用的编码格式与源网络设备的通信制式保持一致, 可使源网络设备在接收到该容器后, 能够方便、快速地解析出其中包含的与切换失败相关的信息, 从而有效降低源网络设备的实现复杂度, 提升网络运行效率。