

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号
WO 2023/205974 A1

(43) 国际公布日
2023 年 11 月 2 日 (02.11.2023)

(51) 国际专利分类号:
H04W 24/08 (2009.01) **H04W 76/30** (2018.01)

(21) 国际申请号: PCT/CN2022/088853

(22) 国际申请日: 2022 年 4 月 24 日 (24.04.2022)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: 北京小米移动软件有限公司 (BEIJING XIAOMI MOBILE SOFTWARE CO., LTD) [CN/CN]; 中国北京市海淀区西二旗中路 33 号院 6 号楼 8 层 018 号, Beijing 100085 (CN)。

(72) 发明人: 董贤东 (DONG, Xiandong); 中国北京市海淀区西二旗中路 33 号院 6 号楼 8 层 018 号, Beijing 100085 (CN)。

(74) 代理人: 深圳市立智方成知识产权代理事务所 (普通合伙) (LIFANG & PARTNERS LTD.); 中国广东省深圳市福田区莲花街道紫荆社区商报东路 11 号英龙商务大厦 1820, Guangdong 518000 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(54) Title: WLAN SENSING MEASUREMENT SETUP TERMINATION METHOD AND APPARATUS, AND ELECTRONIC DEVICE AND STORAGE MEDIUM

(54) 发明名称: WLAN感知测量建立终止方法及装置、电子设备及存储介质

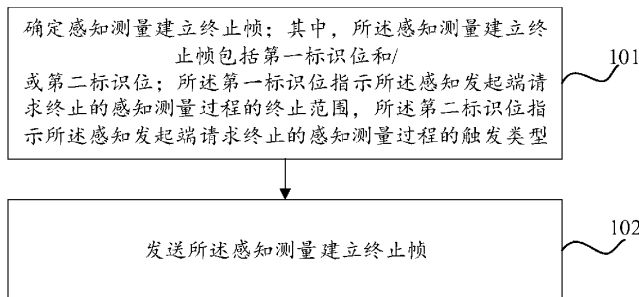


图 1

- 101 Determine a sensing measurement setup termination frame, wherein the sensing measurement setup termination frame comprises a first identification bit and/or a second identification bit, the first identification bit indicates a termination range of a sensing measurement process, the termination of which is requested by a sensing initiator, and the second identification bit indicates a trigger type of the sensing measurement process, the termination of which is requested by the sensing initiator
- 102 Send the sensing measurement setup termination frame

(57) Abstract: The embodiments of the present disclosure relate to the technical field of mobile communications. Provided are a WLAN sensing measurement setup termination method and apparatus, and an electronic device and a storage medium. The WLAN sensing measurement setup termination method comprises: determining a sensing measurement setup termination frame, wherein the sensing measurement setup termination frame comprises a first identification bit and/or a second identification bit, the first identification bit indicates a termination range of a sensing measurement process, the termination of which is requested by a sensing initiator, and the second identification bit indicates a trigger type of the sensing measurement process, the termination of which is requested by the sensing initiator; and sending the sensing measurement setup termination frame. Provided in the embodiments of the present disclosure is a format of a termination message frame during a sensing measurement setup process.

[见续页]

WO 2023/205974 A1

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。

(57) 摘要: 本公开实施例涉及移动通信技术领域, 提供了一种WLAN感知测量建立终止方法及装置、电子设备及存储介质。所述WLAN感知测量建立终止方法包括: 确定感知测量建立终止帧; 其中, 所述感知测量建立终止帧包括第一标识位和/或第二标识位; 所述第一标识位指示所述感知发起端请求终止的感知测量过程的终止范围, 所述第二标识位指示所述感知发起端请求终止的感知测量过程的触发类型; 发送所述感知测量建立终止帧。本公开实施例提供了一种感知测量建立过程中的终止消息帧的格式。