


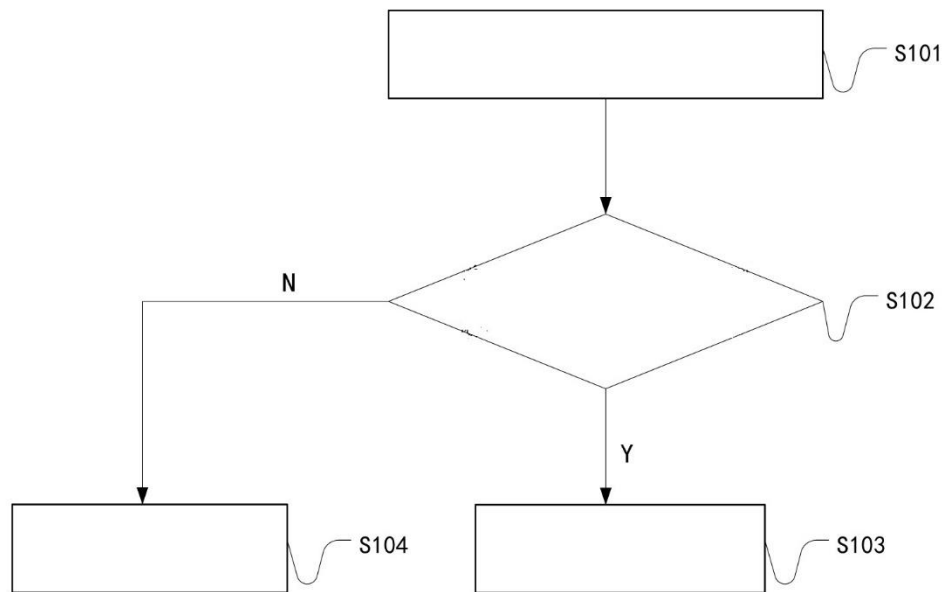

S101 Receive a broadcast message transmitted by a base station

S102 When a synchronization time source is the time synchronization message, execute a time synchronization strategy to determine whether the time precision of the base station satisfies a preset condition

S103 Continuously use the time synchronization message as the synchronization time source

S104 Use locally maintained time information as the synchronization time source

FIG. 1

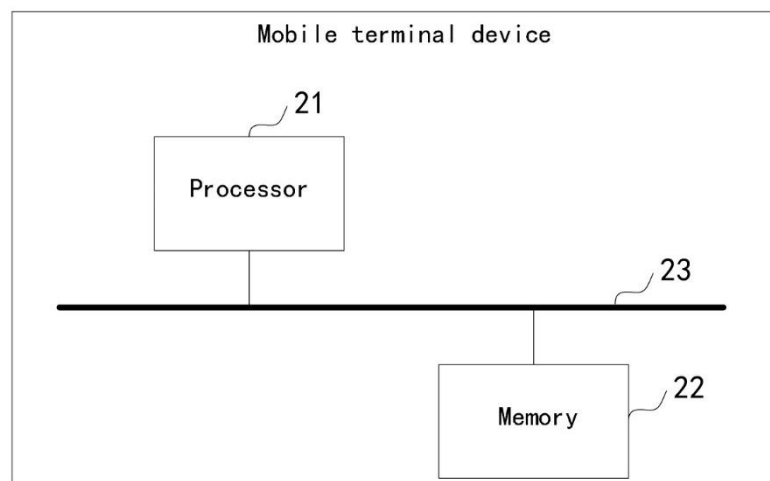


FIG. 2

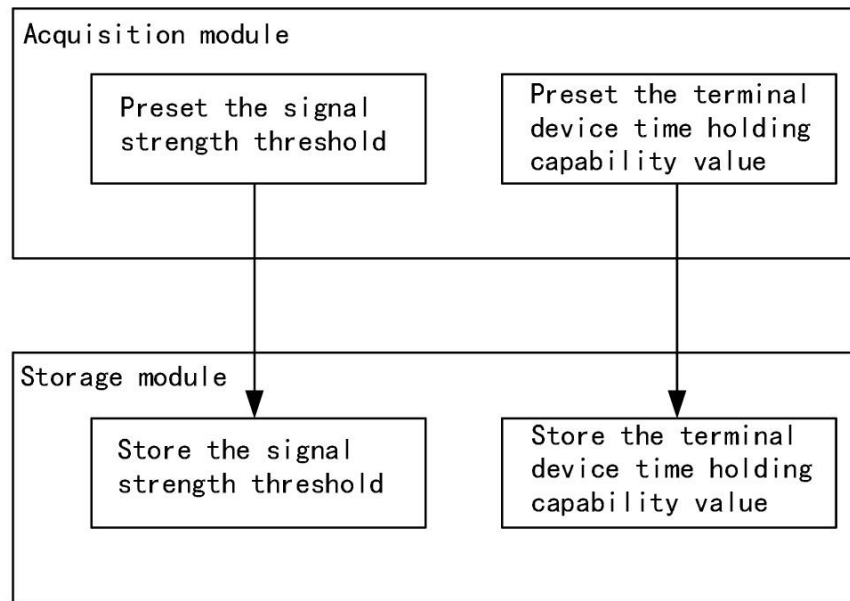


FIG. 3

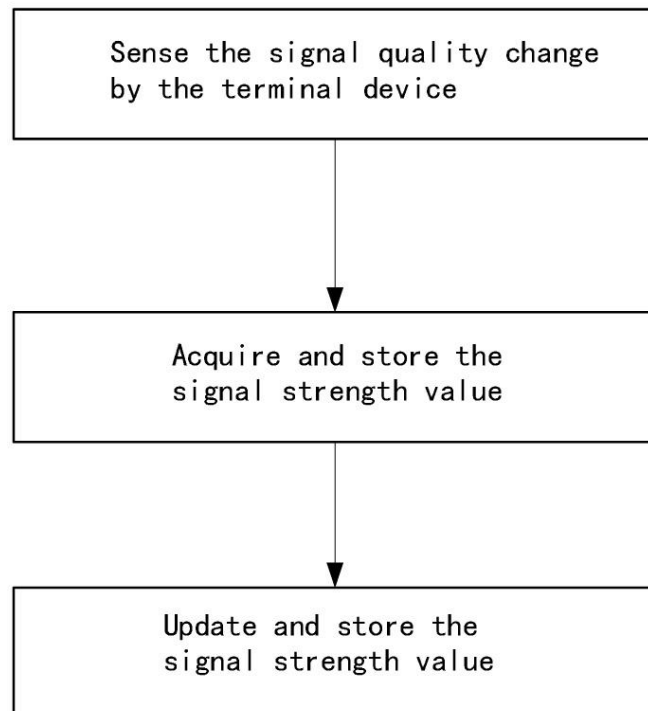


FIG. 4

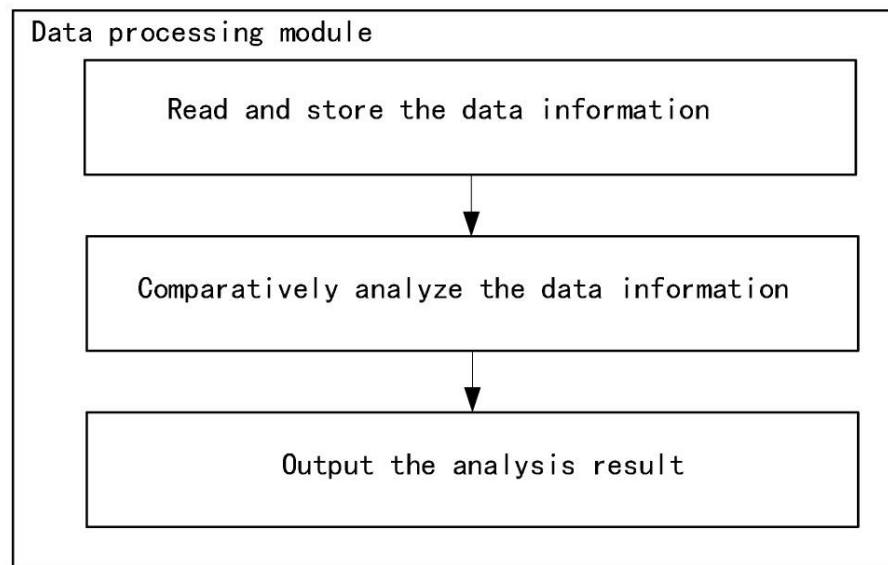


FIG. 5

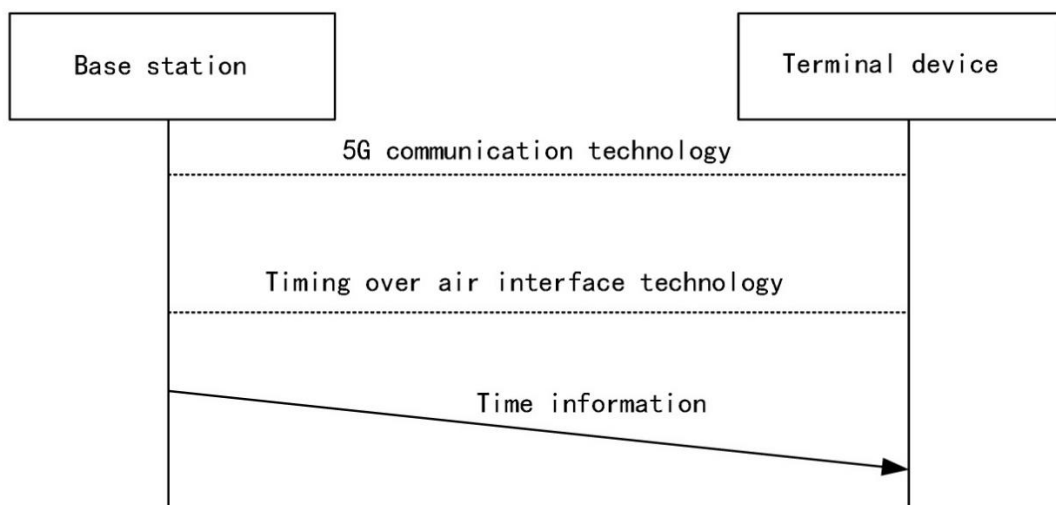


FIG. 6

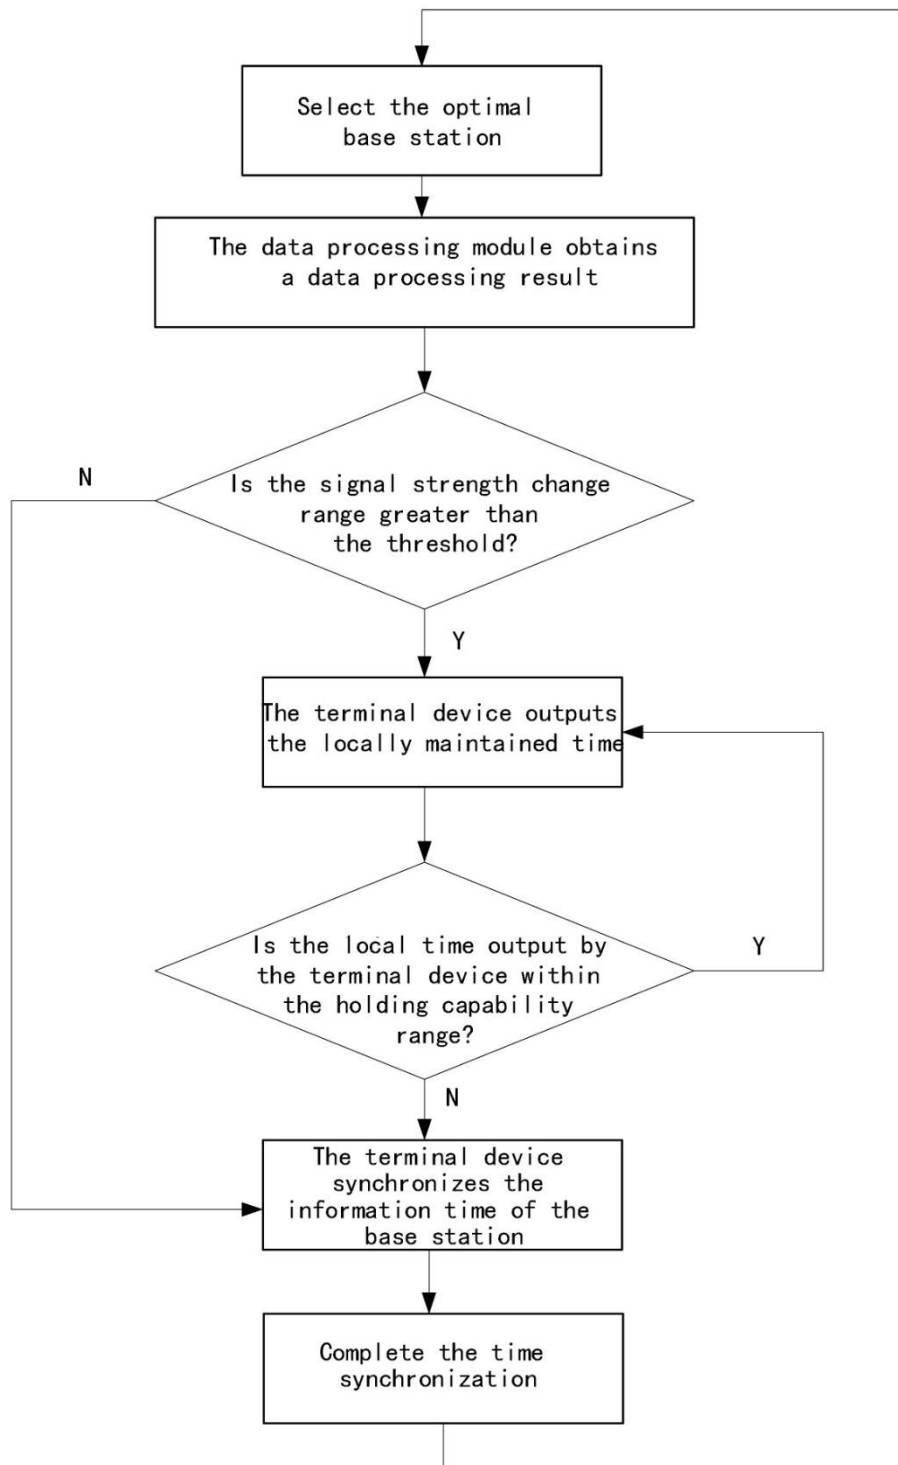


FIG. 7