

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
03 December 2020 (03.12.2020)



(10) International Publication Number
WO 2020/243512 A1

(51) International Patent Classification:
G01L 13/00 (2006.01) G01L 13/04 (2006.01)
G01L 13/02 (2006.01)

(74) Agent: AMUNDSEN, Eric, L. et al.; Wolf, Greenfield & Sacks, P.C., 600 Atlantic Avenue, Boston, MA 02210-2206 (US).

(21) International Application Number:
PCT/US2020/035242

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(22) International Filing Date:
29 May 2020 (29.05.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
16/427,083 30 May 2019 (30.05.2019) US
16/426,974 30 May 2019 (30.05.2019) US
16/427,153 30 May 2019 (30.05.2019) US

(71) Applicant: AIRFLOW DIRECTION, INC. [US/US]; 2 Livingston Lane, Newbury, MA 01951 (US).

(72) Inventor; and

(71) Applicant: WISEMAN, Brian, M. [US/US]; 2 Livingston Lane, Newbury, MA 01951 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: DIRECTIONAL DIFFERENTIAL PRESSURE DETECTOR

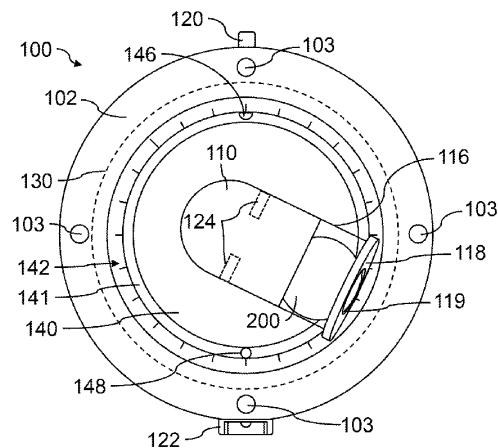


FIG. 11

(57) Abstract: Methods and apparatuses for indicating the presence of a threshold directional differential pressure between separated adjacent spaces. A conduit contains at least one movable element that indicates whether the pressure difference between the two spaces is at least as high as a threshold pressure difference. The apparatus is adjustable to have different threshold set points by adjusting the pivot arm inclination relative to a horizontal plane.

[Continued on next page]

WO 2020/243512 A1

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*