




- (51) **International Patent Classification:**
H04L 12/24 (2006.01)
- (21) **International Application Number:**
PCT/SE2009/050702
- (22) **International Filing Date:**
10 June 2009 (10.06.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/140,414 23 December 2008 (23.12.2008) US
- (71) **Applicant** (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **POWER, John** [IE/IE]; Union Road, Kilmacthomas, Co. Waterford (IE). **TSE, Edwin** [CA/CA]; 4976 Jean Brillant, Montreal, Québec H3W 1T7 (CA).
- (74) **Agent:** **NILSSON, Charlotte**; Ericsson AB, Patent Unit 3G, Torshamnsgatan 23, S-16480 Stockholm (SE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),

[Continued on next page]

(54) **Title:** METHOD AND SYSTEM TO DISTRIBUTE FAULT INFORMATION IN A LARGE SCALE COMMUNICATION NETWORK SYSTEM

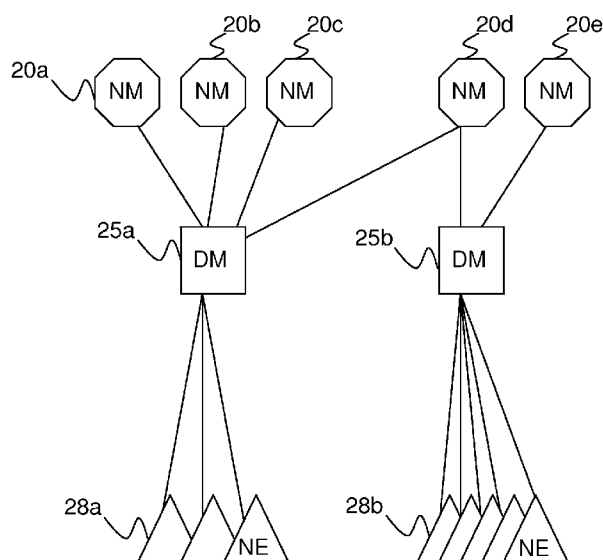

(57) **Abstract:** The present invention relates to a method and an arrangement for distributing fault information from a lower level network management node (25, 28) to a higher level network management node (20) in a network management architecture comprising modules (28) logically representing network nodes and network links under management. The higher level network management node (20) subscribes to at least some detailed fault information. And, a notification comprising a summary of fault information sent by the lower level network management node (25) is received by the higher level network management node (20). Then, the higher level network management node (20) retrieves the subscribed detailed fault information from said received notification.

Fig. 2



OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*