



(51) International Patent Classification:
E05B 49/00 (2006.01) *E05B 65/52* (2006.01)

(21) International Application Number:
PCT/CN2011/072808

(22) International Filing Date:
14 April 2011 (14.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/324,787 16 April 2010 (16.04.2010) US

(71) Applicant (for all designated States except US):
AUSTIN HUGHES ELECTRONICS LTD. [CN/CN];
Unit 3608-12, Cable TV Tower, 9 Hoi Shing Road, Tsuen
Wan, Hong Kong (CN).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HUI, Kin Fai**
[CN/CN]; Unit 3608-12, Cable TV Tower, 9 Hoi Shing
Road, Tsuen Wan, Hong Kong (CN).

(74) Agent: **CHINA TRUER IP**; Suite 2209, Block B, Jia
Zhao Ye Centre, Shangbu Road, Futian District, Shen-
zhen, Guangdong, 518031 (CN).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: DOOR LOCKING SYSTEM

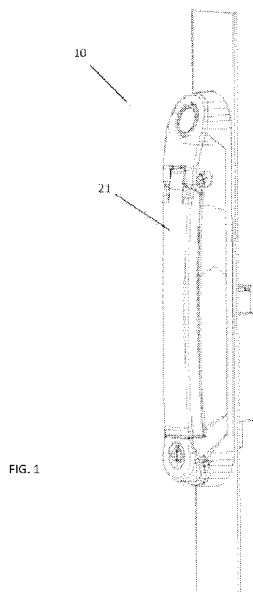

(57) Abstract: A door locking system (10) configured to lock and unlock a door frame of a cabinet is provided. The door locking system (10) includes a handle rod (21); a digital or mechanical door sensor configured to detect whether the door frame of the cabinet is opened or closed; and a latch (103) configured to lock the handle rod (21), wherein the latch (103) is connected to and controlled by a lock mechanism. The lock mechanism includes a mechanical module and an electromechanical module. The mechanical module is configured to actuate the latch (103) to lock and unlock the handle rod (21), and configured to grant the electromechanical module to control over the latch (103) to lock and unlock the handle rod (21).

