

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 April 2008 (10.04.2008)

PCT

(10) International Publication Number
WO 2008/042693 A1

(51) International Patent Classification:
F04F 11/02 (2006.01)

(21) International Application Number:

PCT/US2007/079674

(22) International Filing Date:

27 September 2007 (27.09.2007)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/828,175 4 October 2006 (04.10.2006) US

(71) Applicant (for all designated States except US): **ENERGY RECOVERY, INC.** [US/US]; 1908 Doolittle Drive, San Leandro, CA 94577 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARTIN, Jeremy, G.** [US/US]; 1424 Allston Way, Berkeley, California 94702 (US). **STOVER, Richard, L.** [US/US]; 226 Monte Vista Avenue, Oakland, California 94611 (US).


(74) Agent: **SCHUMANN, James J.**; Fitch, Even, Tabin & Flannery, 120 South LaSalle Street, Suite 1600, Chicago, Illinois 60603-3406 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,

[Continued on next page]

(54) Title: ROTARY PRESSURE TRANSFER DEVICE

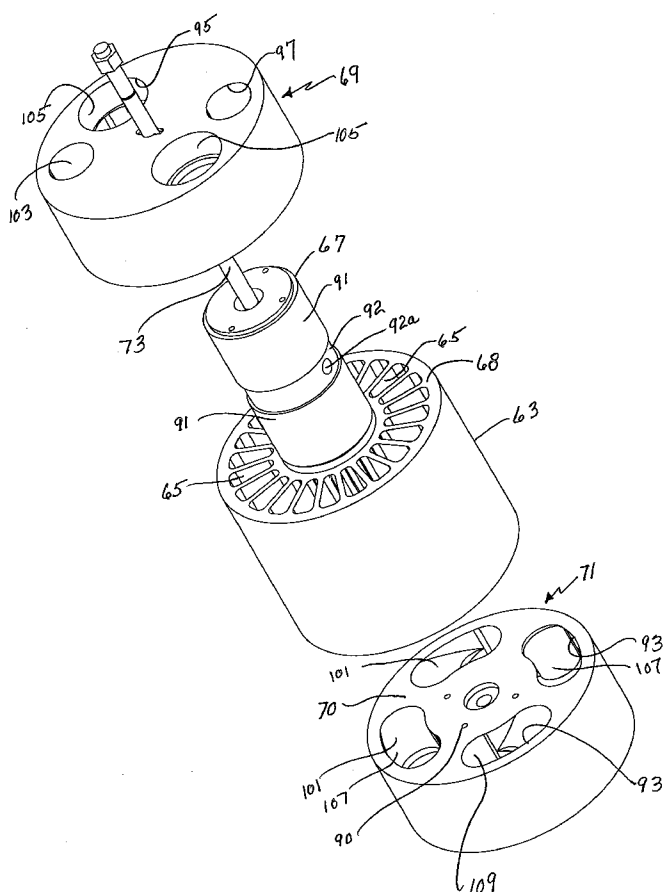

(57) Abstract: A pressure transfer device for the transfer of pressure energy from a high pressure fluid stream to a lower pressure fluid stream wherein a generally cylindrical housing (61) contains a rotor (63) having a plurality of channels (65) extending axially therethrough that revolves about a central stator (67) or within a surrounding sleeve (73) and a pair of end covers (69, 71) which slidingly and sealingly interface with respective planar end faces (68) of the rotor. The end covers (69, 71) and the accompanying components of the device are constructed so as to allow the channels to be at least twice filled with a high pressure first liquid during each revolution of the rotor and thus discharge twice the volume of a pressurized second liquid than if they were filled only one with high pressure liquid.



PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

ABSTRACT

A pressure transfer device for the transfer of pressure energy from a high pressure fluid stream to a lower pressure fluid stream wherein a generally cylindrical housing (61) contains a rotor (63) having a plurality of channels (65) extending axially therethrough that revolves about a central stator (67) or within a surrounding sleeve (173) and a pair of end covers (69, 71) which slidingly and sealingly interface with respective planar end faces (68) of the rotor. The end covers (69, 71) and the accompanying components of the device are constructed so as to allow the channels to be at least twice filled with a high pressure first liquid during each revolution of the rotor and thus discharge twice the volume of a pressurized second liquid than if they were filled only one with high pressure liquid.