

200 3035706

23 JUN 2003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number
WO 02/063461 A1(51) International Patent Classification⁷: G06F 5/06

(21) International Application Number: PCT/FI02/00093

(22) International Filing Date: 8 February 2002 (08.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20010239 8 February 2001 (08.02.2001) FI

(71) Applicant: NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors: HANNUKSELA, Miska; Kukkaniitynkatu 4 B, FIN-33710 Tampere (FI). AKSU, Emre, Baris; Atomikatu 5 A 12, FIN-33720 Tampere (FI).

(74) Agents: JOHANSSON, Folke et al.; c/o Nokia Corporation, P.O. Box 226, FIN-00045 Nokia Group (FI).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR BUFFERING STREAMED DATA

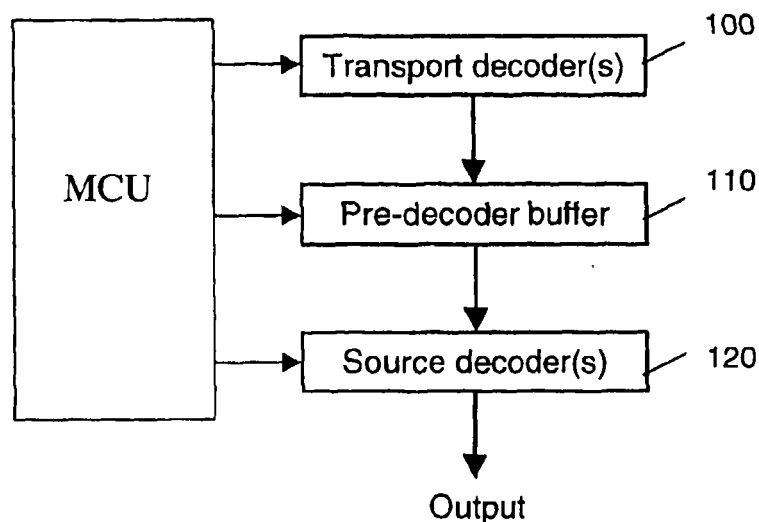

(57) Abstract: The invention discloses a method of improving the playback of streamed media on a client device by overcoming problems caused by variations in the transmission delay of packets due to network and transport protocol operation and variations in encoding/server specific delays. In an embodiment of the invention, a client device has a decoder (120) and a pre-decoder buffer (110) which receives streamed packets from source server via a packet network. The pre-decoder buffer is variable in size and has a variable initial buffering time for receiving the transmitted packets from the source server prior to decoding in the decoder. The initial buffering time and pre-decoder buffer size can be dynamically adapted for improved playback performance by the source server. In a further aspect of the invention, a post-decoder buffer operates in conjunction with the pre-decoder buffer to reduce decoding-related delay variations.

WO 02/063461 A1



ACTION