

PCT

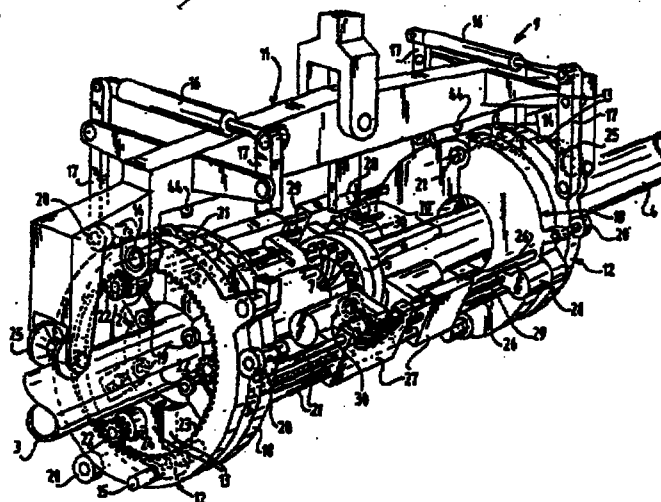
WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16L 1/26, B23P 19/06	A1	(11) International Publication Number: WO 97/15773
		(43) International Publication Date: 1 May 1997 (01.05.97)

(21) International Application Number: **PCT/NL96/00415**(22) International Filing Date: **24 October 1996 (24.10.96)**(30) Priority Data:
1001497 25 October 1995 (25.10.95) NL(71) Applicant (for all designated States except US): **ALLSEAS GROUP S.A. [CH/CH]; 5, route de la Coula, CH-1618 Châtel-Saint-Denis (CH).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WIJSMAN, Jacobus, Cornelis [NL/NL]; Collegiantenstraat 123, NL-2231 HG Rijnsburg (NL). HOVINGA, Robert, Paul [NL/NL]; Dovenetel 12, NL-2671 WL Naaldwijk (NL).**(74) Agent: **KONINGS, Lucien, Marie, Cornelis, Joseph; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).**(81) Designated States: **AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).****Published***With international search report.**In English translation (filed in Dutch).*(54) Title: **METHOD AND APPARATUS FOR ASSEMBLING OR DISASSEMBLING AN INSTALLATION PRESENT ON A SEABED**

(57) Abstract

The invention relates to a method for assembling and disassembling an installation present on a seabed, for instance a pipeline lying on a seabed, wherein components, for instance pipe flanges, are mutually attached by means of nut and bolt connections and the nut and bolt connections are released and/or secured by means of a wrench. Nut and bolt connections are herein released by divers using a wrench. This is heavy and difficult work. It is impossible for divers to operate at considerable depth. Complicated and very costly pipeline connections are then applied which can be released and secured without divers. The invention has for its object to reduce the stated drawbacks of the known method. To this end at least one wrench is used, of which an engagement cup for engaging a nut and/or a bolt head in axial direction of a nut and bolt connection for manipulating is displaceable relative to a cup carrier counter to spring action.