



RTMP's copy

1

PROPULSION SYSTEM FOR A LIGHTER-THAN-AIR VEHICLE**REPLACED SHEETS SG****BACKGROUND OF THE INVENTION**

☒ Description : paged 1.... to paged 12..
☒ Claim(s) : paged 13.. to paged 16..
☐ Drawing(s) : paged to paged
☒ Abstract : paged 17.. to paged

5 Field of the Invention

10 The invention relates to the field of propulsion systems for lighter-than-air vehicles and, in particular, to a propulsion system that provides maneuvering and thrust vectoring control.

Description of Related Art

15 One of the major problems with both rigid and non-rigid lighter-than-air vehicles is their limited ability to station keep and/or maneuver when docking, especially if there are any significant cross-winds. This is due primarily to their large cross-sectional area, which causes the vehicle to "weather vane" and "wave" with the wind.
20 They are particularly difficult to control if the wind is gusting or when there are significant up or down drafts. In fact, docking has proven to be the most difficult portion of a flight for a lighter-than-air-vehicle.

25 In the past reversible propellers have been used to provide braking as well as differential thrust for directional control, but have proven to be only marginally effective. Side thrusters in the form of ducted fans or propellers are more effective, but when dedicated solely for
30 docking and "take off", the vehicle clearly incurs a significant weight penalty. Examples of these can be found in U.S. Patent Nos. 1, 876,153, "Aerial Transportation System" by S. O. Spurrier and 4,402,475, "Thrusters for Airship Control" by V.H. Pavlecks. Dedicated vertical lift
35 propellers have also been used to provide additional lift at take off; however, the same weight penalty is encountered. Examples of these can be found in U.S. Patent Nos.



1,677,888, "Aircraft" by A. Rees and 5,026,003, "Lighter-Than-Air Aircraft" by W. R. Smith.

5 Another approach has been the use of ducted and un-
ducted propellers that can rotate from a position aligned
with the longitudinal axis of the vehicle to a vertical
position. This system, while providing upward and downward
thrust, do not provide side thrust. Another disadvantage is
the fact that, if the ducted fans are mounted on the cargo
10 compartment or gondola, the exhaust therefrom will strike
the gasbag when providing downward thrust, unless they are
mounted on extremely long pylons. Furthermore, if the
vehicle is very large, the ducted fans and the powerplants
therefore, must also be large to provide sufficient cruising
15 speed. This can create structural weight problems if the
powerplants are integral with the ducted fans, for the
mechanism for supporting and rotating the combination ducted
fan and powerplant becomes quite large.

20 There are three general types of non-rigid vehicles: those
comprising a single gas filled bag; several gasbags joined
together in series; and, of course, those having a multiple
number gasbags within a non-rigid envelope. A particular
problem with such non-rigid vehicles is that, because of the
25 lack of rigid structure within the gas bag, the placement
of the thrust assemblies is limited to the gondola. Thus,
because the gondola is suspended from the bottom of the
vehicle, any maneuvering forces generated by the propulsion
system can not act through the center of pressure of the
30 vehicle and, therefore, their effectiveness is reduced.
This is also generally true of rigid airships that have an
internal structure defining the shape of the vehicle that
contain a plurality of gasbags with an aerodynamic cover
thereover. For even though the propulsion system can be
35 mounted almost anywhere on the rigid structure, they are
most often mounted at or near the bottom of the vehicle for
ease of access, etc. Thus what is needed is a propulsion



system wherein all these control problems are addressed while inducing a minimum weight addition to the vehicle.

Thus it is a primary object of the subject invention to provide a propulsion system for a lighter-than-air vehicle.


It is another primary object of the subject invention to provide a propulsion system for a lighter-than-air vehicle that provides increased maneuvering capability.

It is a further object of the subject invention to provide a propulsion system for a lighter-than-air vehicle that provides for the repositioning of the thrust producing assemblies, such as ducted and unducted fans or propellers, so that side thrust can be provided without exhaust therefrom striking the gasbag of the vehicle.

It is another object of the subject invention to provide a propulsion system for a lighter-than-air vehicle wherein the thrust producing assemblies, such as ducted and unducted fans or propellers, can be positioned so as not to interfere with ground handling equipment when docking.

SUMMARY OF THE INVENTION


The invention is a propulsion system for a lighter-than-air vehicle of either the rigid or non-rigid type, having a longitudinal, horizontal and vertical axis. In non-rigid vehicles the cargo compartment and flight control station are suspended from the gasbag and, therefore, are called a gondola. In rigid vehicles, such structure can be integrated and need not be suspended. However, for purposes of discussion, the cargo compartment and flight station shall be referred to as the "cargo structure". In detail, there are a plurality of propulsion systems located in equal numbers on either side of the vertical axis thereof. Each propulsion system includes a thrust producing



assembly that can be a fan, ducted fan, propeller, or ducted propeller. However, ducted fans or propellers are preferred from a safety standpoint for if there is a blade failure, the duct wall would prevent the blade from possibly ripping open the gasbag. The thrust assembly could also be a turbofan engine; however, due to the extremely low cruise speed of such vehicles, less than 100 miles per hour, and the need for high fuel efficiency, they are not often used in such applications.

Preferably the thrust assembly is mounted on the end of a pylon that, in the cruise position, extends horizontally outward from the vehicle perpendicular to the longitudinal axis. If the vehicle is a non-rigid type, the pylon is attached to the gondola. On a rigid design, it is possible to attach the pylon to the main support structure; however, even with rigid designs, it is more desirable to attach the thrust producing assemblies on the cargo compartment to provide ease of access for maintenance, repair and removal. This is particularly true if the vehicle is extremely large.

The thrust assembly is rotatably mounted on the free end of the pylon, rotatable about an axis of rotation that lies in a plane perpendicular to the longitudinal axis of the pylon. Preferably, the thrust assembly is rotatable from a position wherein the thrust is directed forward to a position wherein the thrust is directed backwards, that is rotatable plus or minus one-hundred and eighty (180). Thus thrust can be directed vertically upward, vertically downward and to the rear. Note that if thrust reversing propellers or fans are used, rotation could be limited to a plus or minus ninety (90) degrees. Rotation of the thrust assemblies is accomplished by a first actuation assembly mounted on the end of the pylon. A suitable first actuation assembly comprises a ring gear mounted on the thrust assembly engaging a pinon gear attached to the output shaft



of a hydraulic or electrical motor mounted on the pylon. The use of such a gear assembly allows for the "locking" of the thrust assembly in any selected position; however, other mechanisms can be used. It is also important to note that the thrust axis of the thrust assemblies can be individually positioned to provide a wide variety of combinations as a further aid in maneuvering the vehicle.

The pylon is rotatably mounted to the vehicle such that the thrust assembly can be positioned by a second actuation system upward and downward from the horizontal. Typically, this is a jack screw assembly mounted on the vehicle with the end of the jack screw attached to the pylon. Upward positioning is desirable in order to clear ground support equipment when the vehicle is docked. The downward position is desirable when the thrust assembly is rotated at ninety degrees to provide side and downward directed thrust. The adjusting of the thrust assembly to provide downward thrust, in conjunction with the positioning of the pylon in the downward position, allows the exhaust to be directed at an angle so as to miss the gasbag. This is particularly advantageous when the thrust assembly is mounted on the cargo structure below the gasbag and thus positioned well under.

Preferably the power to the thrust assembly is provided by a powerplant mounted on the vehicle, in the case of a non-rigid airship, in the gondola structure. The powerplant is coupled to the thrust assembly via drive shafts and universal joints and a transmission assembly so that rotation of the pylon and thrust assembly can be accomplished. This is particularly desirable because, if both the pylon and thrust assembly can be rotated, having the powerplant mounted at the end of the pylon could add a significant weight penalty. Additionally, mounting the powerplant in the cargo structure provides much easier access thereto. The advantage of this method of mounting can be



readily seen if the vehicle is extremely large. For example in a non-rigid airship having a million pound payload, the vehicle is over 1000 feet in length and 260 feet in diameter. Six ducted fans having 18 foot diameter blades are required with each fan driven by two 2000 shaft horsepower diesel engines. Rotating the pylon and/or the ducted fans with the two diesel engines directly attached to the fan would incur an extremely large weight penalty.

10 In a second embodiment the thrust assembly is rotatably mounted on the free end of a fixed position pylon or other rigid structure, rotatable about an axis of rotation in a plane at an acute angle to the vertical axis. Preferably, the thrust assembly is rotatable plus or minus 180 degrees in that plane. Thus upward (lifting) directed thrust is available for takeoff, while downward directed thrust can be used for docking, and reverse and side thrust is available for both maneuvers. The acute angle of the plane in which the thrust assemblies rotate should be sufficient so that the exhaust therefrom will miss the gas bag when down thrust is required. However, this angle can be increased beyond the amount needed to clear the gasbag should it be determined that a larger percentage of side force relative to either the upward or downward directed thrust, is needed to control the vehicle. Of course, if the propellers or fans are reversible, then rotation can be limited to plus or minus 90 degrees in the acute angle plane. Thus the thrust assemblies should be rotatable at least plus or minus 90 degrees in their plane of rotation.

30

As in the first embodiment, it is desirable to mount the powerplant in the cargo structure and provide power to the thrust assembly via a drive shaft mounted within the pylon. A gear box is mounted on the end of the pylon coupled to the output shaft of the powerplant providing the desired angular change in direction. Rotation of the thrust assembly is accomplished by an actuation assembly

35



mounted on the end of the pylon similar to the first actuation system used to rotate the thrust assembly in the first mentioned embodiment. Again, it is important to note that the thrust axis of the thrust assemblies can be
5 individually positioned to provide a wide variety of combinations as a further aid in maneuvering the vehicle.

The novel features which are believed to be characteristic of the invention, both as to its organization and
10 method of operation, together with further objects and advantages thereof, will be better understood from the following description in connection with the accompanying drawings in which the presently preferred embodiments of the invention are illustrated by way of examples. It is to be
15 expressly understood, however, that the drawings are for purposes of illustration and description only and are not intended as a definition of the limits of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

20

Figure 1 is a perspective view of a lighter-than-air vehicle incorporating the subject propulsion system.

25

Figure 2 is a partial front view of the vehicle shown in Figure 1.

30

Figure 3 is an enlarged view of a thrust assembly illustrating some of the various types thereof that can be used in the subject propulsion system.

35

Figure 4A is an enlarged partial view of Figure 2 particularly illustrating the propulsion system with the thrust assembly in the cruise position.

Figure 4B is a view similar to Figure 4A illustrating the propulsion system with the thrust assembly in the docking (maneuvering) position.



Figure 4C is a view similar to Figure 4A illustrating the propulsion system with the thrust assembly in the docking (maneuvering) position with the thrust assembly rotated downward.

5

Figure 4D is a view similar to Figure 4A illustrating the propulsion system with the thrust assembly in the docked position.

10 Figure 5 is a top view of the propulsion system shown in Figure 4 taken along the line 5-5.

15 Figure 6 is a side view of the powerplants of the propulsion system shown in Figure 5 taken along the line 6-6 in Figure 5.

Figure 7 is a partial cross-sectional view of Figure 5 taken along the line 7-7

20 Figure 8 is a view similar to Figure 4A illustrating a version of the propulsion system wherein the powerplant is integral with the thrust producing assembly.

25 Figure 9 is a view similar to Figure 2 illustrating an alternate embodiment of the propulsion system wherein the pylon is stationary and the thrust assemblies are rotatable in a plane at an acute angle to the vertical axis of the vehicle.

30 Figure 10 is an enlarged view of a portion of Figure 7 partially broken away to illustrate the details of the propulsion system.

35 Figure 11 is a view similar to Figure 8 illustrating a version of the propulsion system wherein the powerplant is integral with the thrust producing assembly.

**DESCRIPTION OF THE PREFERRED EMBODIMENT**

Illustrated in Figures 1 and 2 is a lighter-than-air vehicle incorporating the subject propulsion system. The vehicle, designated by numeral 10, is a non-rigid design having a longitudinal axis 12, vertical axis 14, and horizontal axis 16 and includes a helium bag 18 with a cargo structure 20, in the form of a gondola, mounted at the bottom. It should be noted that the propulsion system could also be use on a rigid vehicle design. In addition, whereas a gondola type cargo compartment (suspended cargo compartment) is necessary on a non-rigid vehicle it is certainly not required on a rigid design. Thus a gondola style cargo compartment is also for purposes of illustration only and, again, hereinafter generally referred to as a cargo structure. The vehicle 10 includes six separate propulsion systems 24 having thrust producing assemblies, in the form of ducted propellers 26 mounted along the cargo compartment 20, three on each side (only those on the left side are shown in Figure 1). However, as shown in Figure 3, ducted fans 27, as well as unducted propeller and fans assemblies, 28 and 29, respectively, could be substituted and, therefore, the use of ducted propellers, and the number of thrust assemblies for that matter, is for purposes of illustration only. Additionally, propellers or fans can and, preferably, are reversible.

Still referring to Figures 1 and 2 and, additionally, to Figures 4A, B, C and D, as well as Figures 5, 6 and 7, it can be seen that each propulsion system 24 includes a pair of diesel engines 32A and 32B mounted on the floor 33 of the cargo compartment 20. The engines 32A and 32B have drive shafts 34A and 34B on a common centerline 36 that couple to a transmission assembly 38 rotatably mounted to the floor 33. A pylon 40 is coupled by its first end 42 to the transmission assembly 38 and by its second end 44 to the ducted propeller 26. The pylon 40 is hollow and contains a



drive shaft 46 mounted therein that connects from the transmission assembly 38 to the ducted propeller 26 for driving same. A sway brace 52 is pivotally mounted by a first end 54 to the cargo compartment 30 on the centerline 36 of the drive shafts 34A and 34B, and by its second end 56 to the pylon 40 for reacting thrust loads on the pylon. An actuation assembly in the form of a jack screw 60 is mounted on the cargo compartment 20 having an end 62 of the screw attached to the pylon 40 for rotating the pylon about the centerline 36.

The ducted propeller 26 includes individual propeller blades 64 rotatably mounted on a centerbody 66. The centerbody also supports the duct 68 by means of struts 70. The second end 44 of the pylon 40 extends through the duct 68 (the duct is rotatable thereabout) and couples to and supports the centerbody 66 by thrust bearings (not shown). The drive shaft 46 couples to a gearbox (not shown) that drives the propeller blades 64. Rotation of the ducted propeller is accomplished by an actuation assembly 74 mounted on the pylon that includes a motor 76 having a pinon gear 78 that engages a ring gear 80 attached to the duct 68. Thus rotation of the ducted propeller 26 about the pylon 40 can be accomplished regardless of the pylon's position. If the ducted propeller is reversible, it need only rotate plus or minus 90 degrees; if not, it should be rotatable a full 180 degrees.

Referring to Figures 4A,B,C,and D, in operation, the pylon 40 can be rotated from its cruise position 40 (Figure 4A) to the docking or maneuvering position 40A (Figure 4B) by actuation of the jack screw 60. When docking, the ducted propeller 26 can be rotated ninety degrees, indicated by numeral 26A (Figure 4C), to provide both downward and side thrust or upward and side thrust, as desired. Note that the exhaust, indicated by numeral 82, misses the gasbag 18. Thus in any design, the length and the angle of the pylon is




rotated should be sufficient to allow the exhaust from the thrust assembly to miss the gasbag, when producing downward directed thrust. When docking lines (not shown) are secured, the pylon 40 can be rotated upward to the docked position 40B (Figure 4D), wherein the ducted propeller 26 is out of the way of any ground based docking structure (not shown). It should be noted that on the vehicle illustrated in Figure 1, there where six ducted propellers 26 incorporated and by independently adjusting the rotational position of each, as well as pylon 40 position, considerable latitude in thrust vectoring between ducted propellers is possible.

Referring to Figure 8 it can be seen that the propulsion system can be used when the powerplant is integral with the thrust assembly, for example a turbofan engine. As illustrated in Figure 8, a pylon 110, having a longitudinal axis 111, is pivotally mounted to the cargo compartment 20 by its first end 112 and by its second end 114 to a turbofan engine 118. The actuation assembly 60 is used to rotate the pylon 110 and the actuation assembly 74 (shown in Figure 7 but not shown in Figure 8) is used to rotate the turbofan engine about the longitudinal axis 111 of the pylon 110.

25

Illustrated in Figures 9 and 10 is a second embodiment of the propulsion system, generally indicated by numeral 90, wherein a fixed pylon 92 is used to support a ducted fan 94, The power plants 32A and 32B are coupled to a transmission assembly (not shown) that is fixed to the cargo floor 33. The first end 96 of the pylon 92 is coupled to the transmission assembly (not shown in Figures 9 and 10) while the second end 98 is coupled to the ducted fan 94 through a gearbox 100. The gearbox provides an angular change in the plane of rotation, with the angle selected so that the exhaust from the thrust assembly misses the gasbag when it is rotated to provide downward directed thrust (as

30
35



illustrated by a forty-five (45) degree gearbox 100). An actuation assembly 102, similar to actuation assembly 74, is used to rotate the ducted fan 94 plus or minus 90 degrees or 180 degrees if the ducted fan 94 incorporates reversible fan blades. This propulsion system allows for side thrust to be generated during docking. However, there is no capability to move the ducted fan upward when in the docked position. It does have the advantage of providing side thrust with a somewhat simpler system.

As illustrated in Figure 11, the second embodiment can also be used where the powerplant is integral with the thrust assembly, again for example a turbofan engine. In Figure 10, it can be seen that a pylon 120 is rigidly mounted by its first end 122 to the cargo compartment 20 and by its second 124 to the turbofan engine 118 by means of a gearbox 100. An actuator assembly 102 is used to rotate the turbofan engine 118 in the plane angled to the vertical axis of the vehicle (as illustrated at a 45 degree angle). Finally, in Figure 11, the thrust producing assembly 118 is shown rotated 180 degrees to provide reverse thrust. As previously discussed, the 180 degree rotation is applicable to all the embodiments previously discussed where thrust reversing is not provided.

While the invention has been described with reference to particular embodiments, it should be understood that the embodiments are merely illustrative as there are numerous variations and modifications which may be made by those skilled in the art. Thus, the invention is to be construed as being limited only by the spirit and scope of the appended claims.

INDUSTRIAL APPLICABILITY

The invention has applicability to the aircraft industry.



CLAIMS

1. A propulsion system for a lighter-than-air vehicle, the vehicle having a longitudinal, horizontal and vertical axis, said propulsion system comprising:

5 a pylon having a longitudinal axis and first and second ends, said first end of said pylon rotatably mounted to the vehicle and said second end extending outward from the vehicle, said pylon rotatable about
10 said first end in a vertical plane perpendicular to the longitudinal axis of the vehicle in an upward and downward direction;

a thrust producing assembly mounted on the second end of said pylon; said thrust producing assembly
15 rotatable about an axis of rotation in a plane perpendicular to the longitudinal axis of said pylon, said thrust producing assembly rotatable at least plus or minus ninety degrees in a plane perpendicular to the longitudinal axis of the pylon;

20 a powerplant assembly coupled to said thrust producing assembly to provide power thereto;

first means to rotate said assembly about said axis of rotation; and

25 second means to rotate said pylon about said first end.

2. The propulsion system as set forth in Claim 1 wherein said pylon is rotatable about said first end upward and downward from a plane parallel to the



horizontal axis of the vehicle.

3. The propulsion system as set forth in Claim 2 wherein said thrust producing assembly is selected from the group consisting of fans, ducted fans, propellers and ducted propellers.

4. The propulsion system as set forth in Claim 3 wherein said powerplant assembly is integral with said thrust producing assembly.

5. The propulsion system as set forth in Claim 3 wherein said vehicle includes a cargo compartment mounted on the bottom thereof, said propulsion system comprising:

said powerplant assembly includes an engine mounted in said cargo compartment, said engine having a first output shaft;

a transmission assembly coupled to said first output shaft and having a second output shaft, said transmission assembly rotatably mounted to the cargo compartment about an axis coincident with said axis of rotation of said pylon;

said first end on said pylon attached to said transmission assembly; and

said second output shaft mounted within said pylon and coupled to said thrust producing assembly.

6. The propulsion system as set forth in Claim 5



compromising:

said powerplant assembly including a second engine having a third output shaft, said second engine mounted in said cargo compartment in a spaced
5 relationship to said first mentioned engine, such that said first and third output shafts are on a common centerline;

said transmission assembly mounted between said first and second engines and also coupled to said
10 third output shaft;

such that both engines drive said second output shaft via said transmission.

7. The propulsion system as set forth in Claim 6
15 wherein said means to rotate said thrust producing assembly about axis of rotation comprises:

a ring gear mounted on said thrust assembly;
and

a motor mounted on said pylon, said pylon
20 having a pinon gear mounted thereon on engagement with said ring gear;

such that rotation of said pinon gear by said motor causes said thrust producing assembly to rotate.

25 8. The propulsion system as set forth in Claim 6 wherein said second means comprises a jack screw mounted on said vehicle, said jack screw having an output shaft coupled to said pylon, such that the extension and retraction of said output shaft causes said pylon to



rotate downward and upward about said first end.

9. The propulsion system as set forth in Claim 6
wherein said first and second engines are diesel
5 engines.

10. The propulsion system as set forth in any one
of Claims 1-9, wherein said thrust producing assembly
includes reversible thrust capability.

10

11. The propulsion system as set forth in any one
of Claims 1-9 wherein said thrust producing assembly is
rotatable plus or minus one-hundred and eighty degrees.

15

**PROPULSION SYSTEM FOR A LIGHTER-THAN-AIR VEHICLE****ABSTRACT**

5 The invention is a propulsion system for a lighter-
than-air vehicle 10. In detail the propulsion system
includes a pylon 40 having a longitudinal axis and first and
second ends 42,44, the first end 42 of the pylon 40
10 rotatably mounted to the vehicle 10 and the second end 44
extending outward from the vehicle. The pylon 40 is
rotatable about the first end 42 in a plane perpendicular to
the longitudinal axis 12 of the vehicle. A thrust producing
assembly 26 is mounted on the second end 42 of the pylon 40
and is rotatable about an axis of rotation in a plane
15 perpendicular to the longitudinal axis of the pylon 40. A
powerplant assembly 32A, 32B is coupled to the thrust
producing assemblies 26 to provide power thereto. An
actuation system 74 is provided for rotating the assembly 26
about the axis of rotation. A second actuation system 60 is
20 provided for rotating the pylon 40 about the first end 42.

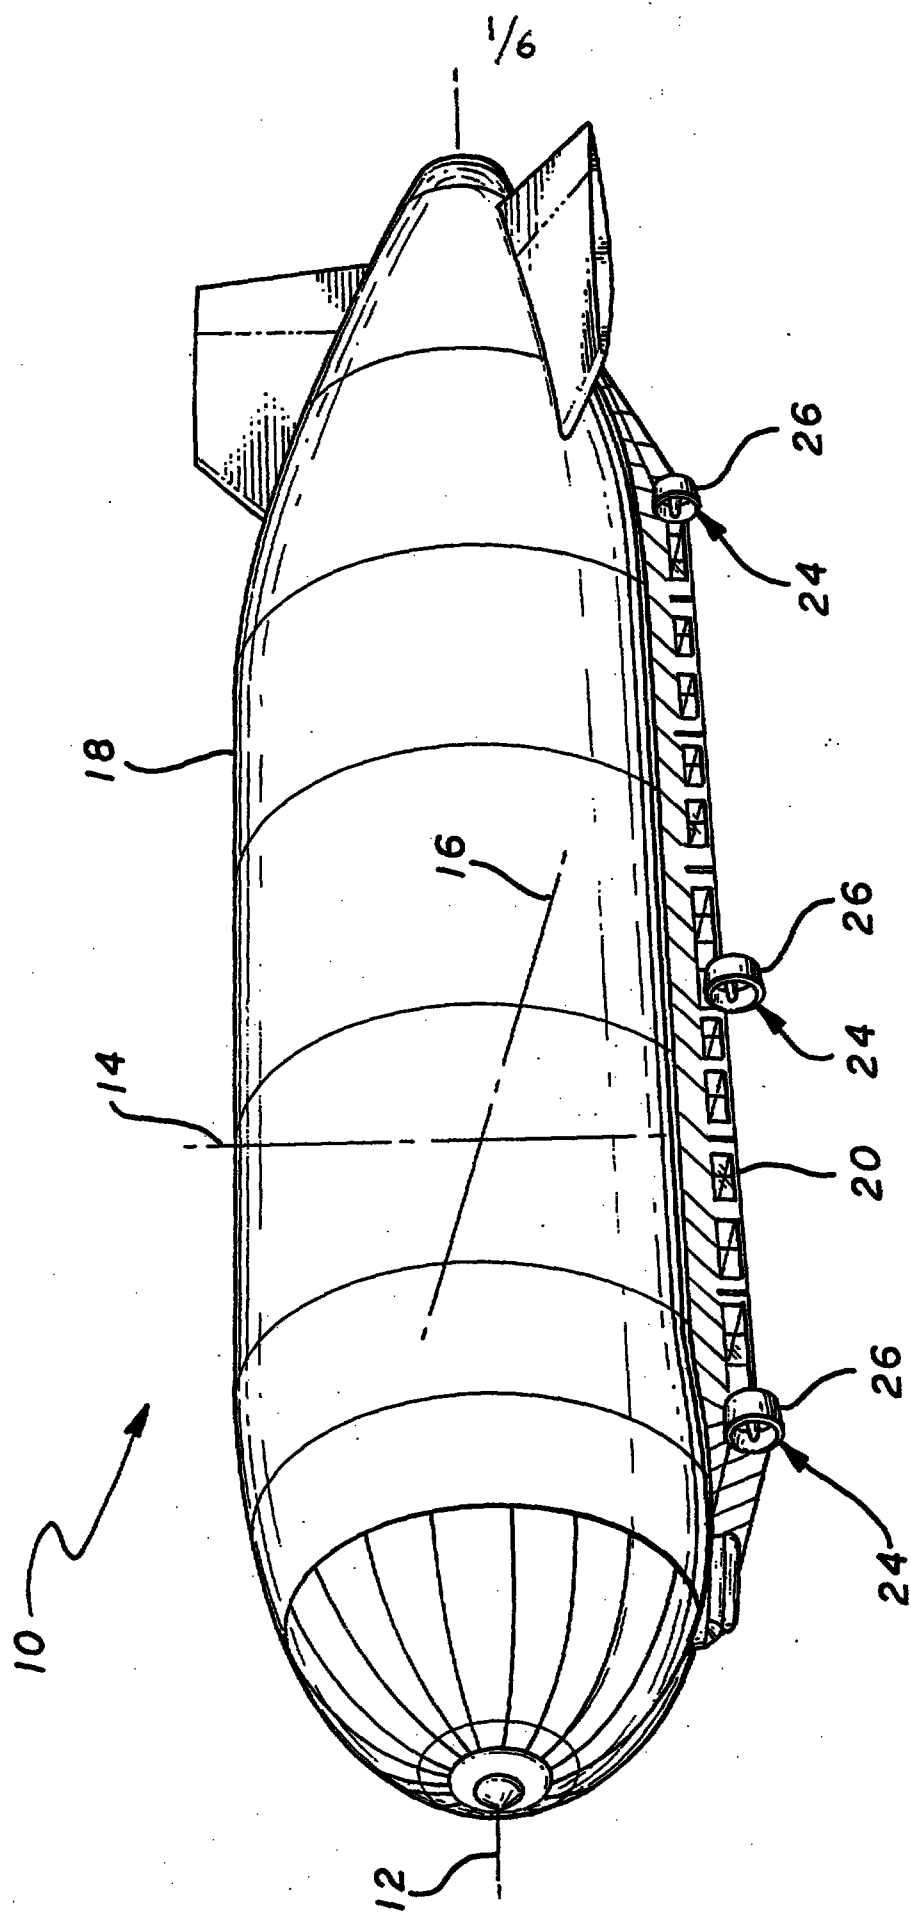


FIG. 1

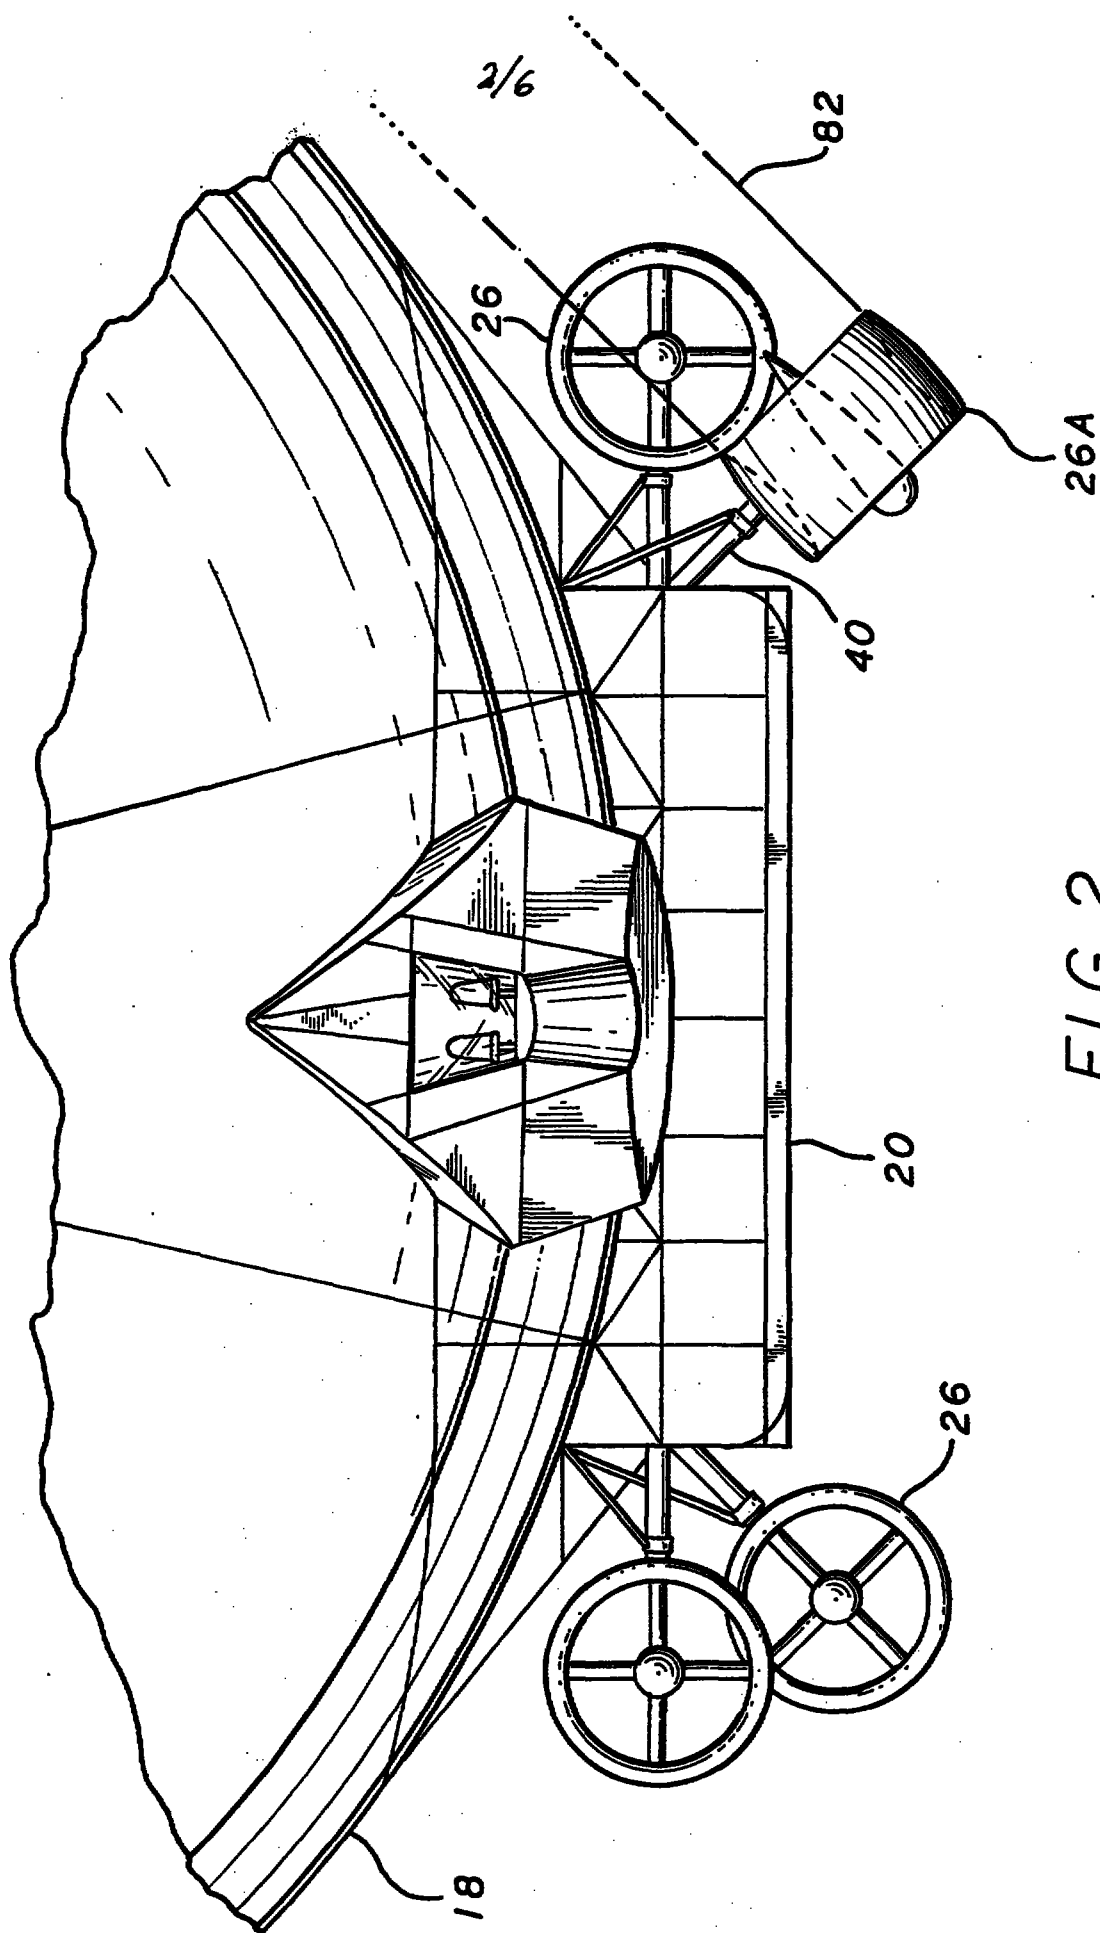


FIG. 2

3/6

FIG. 3

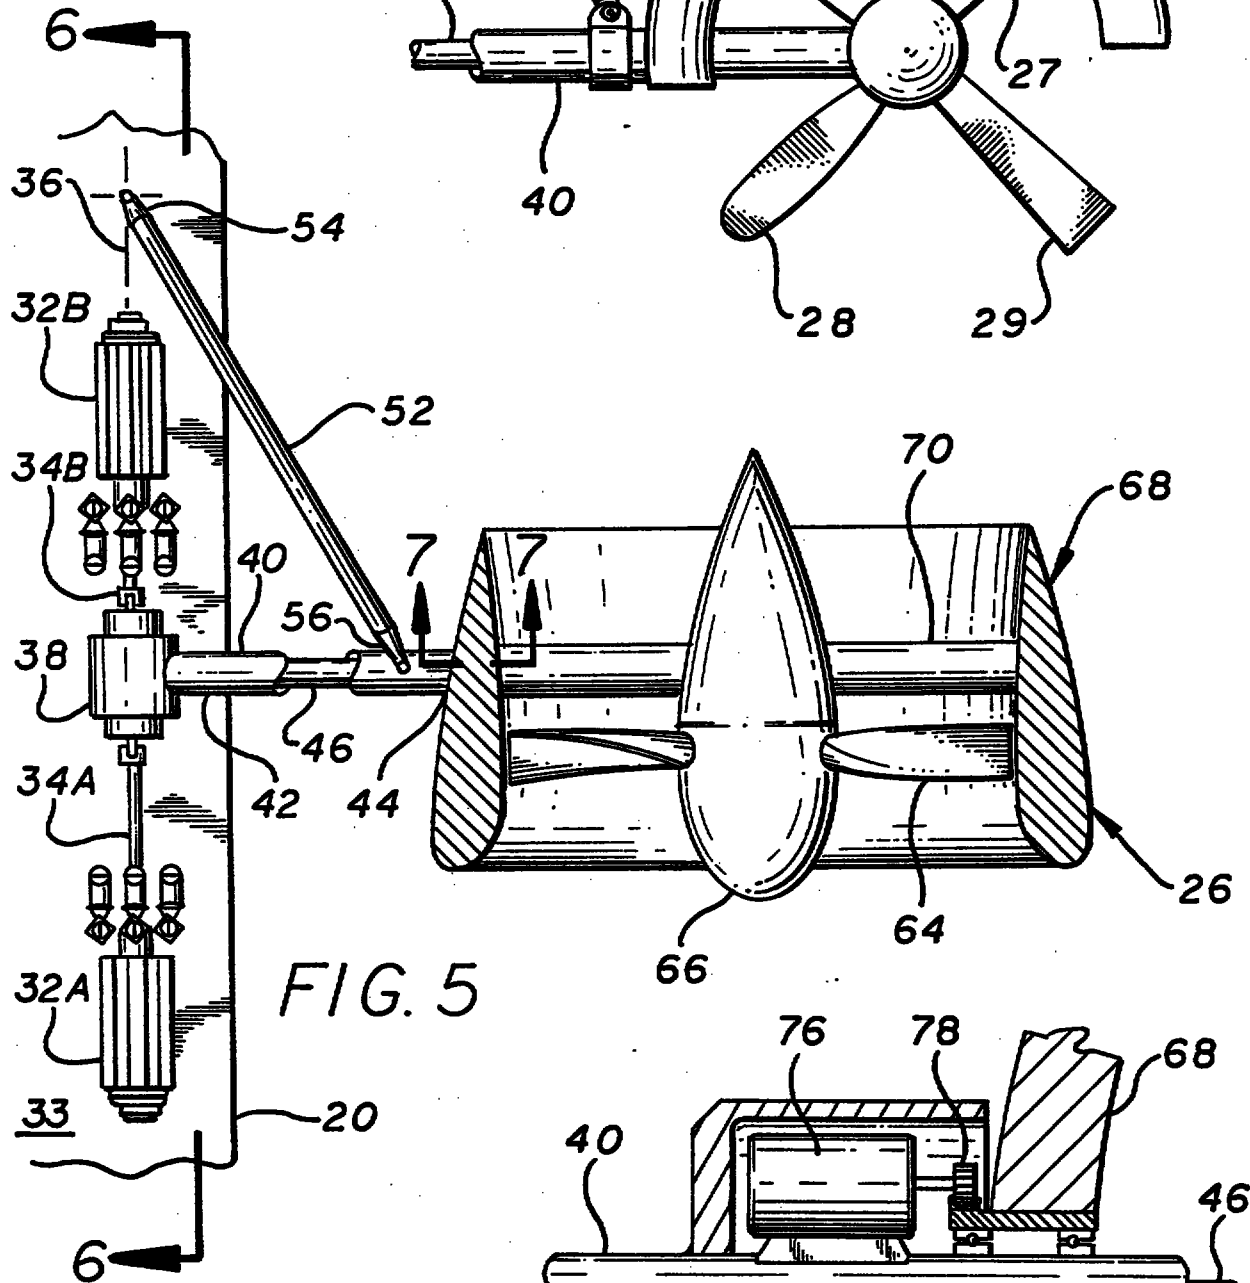
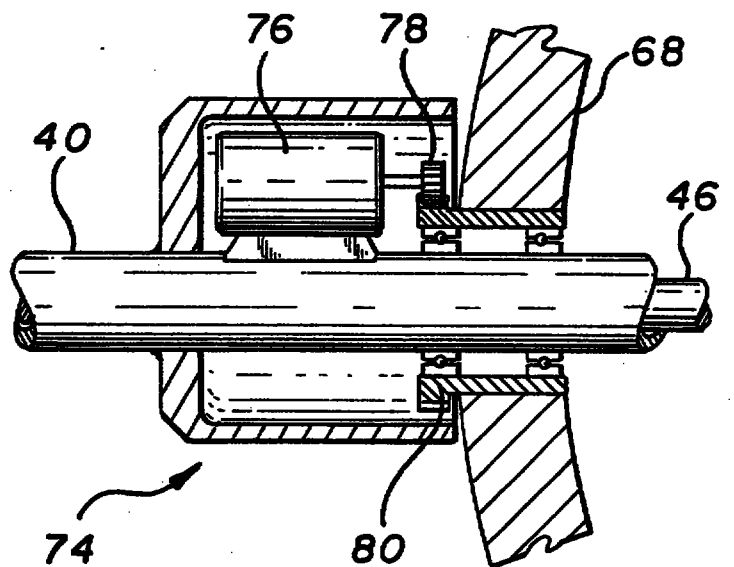
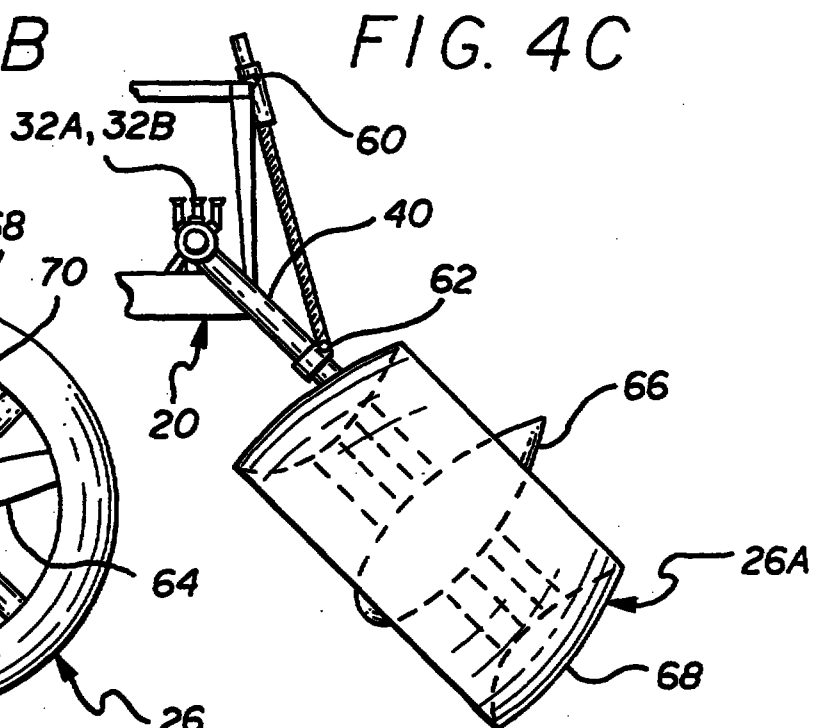
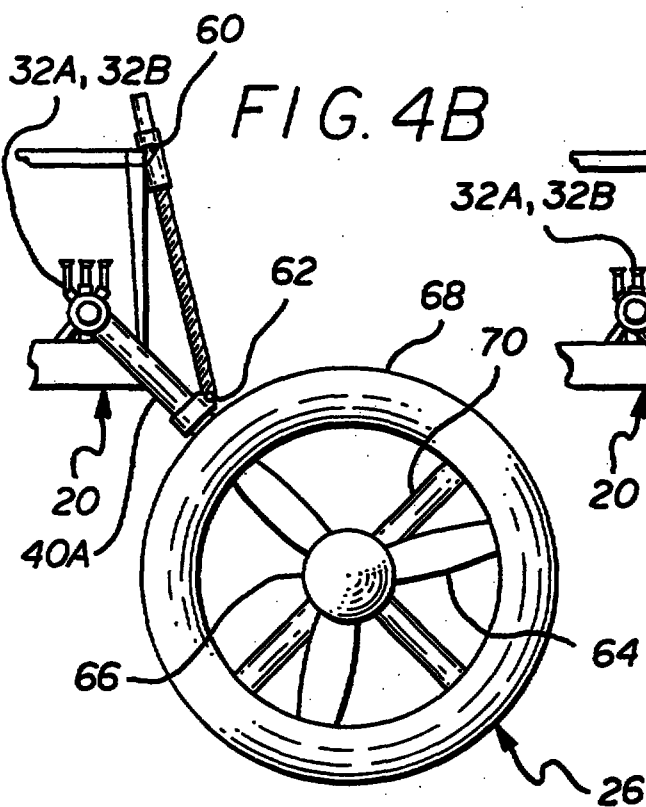
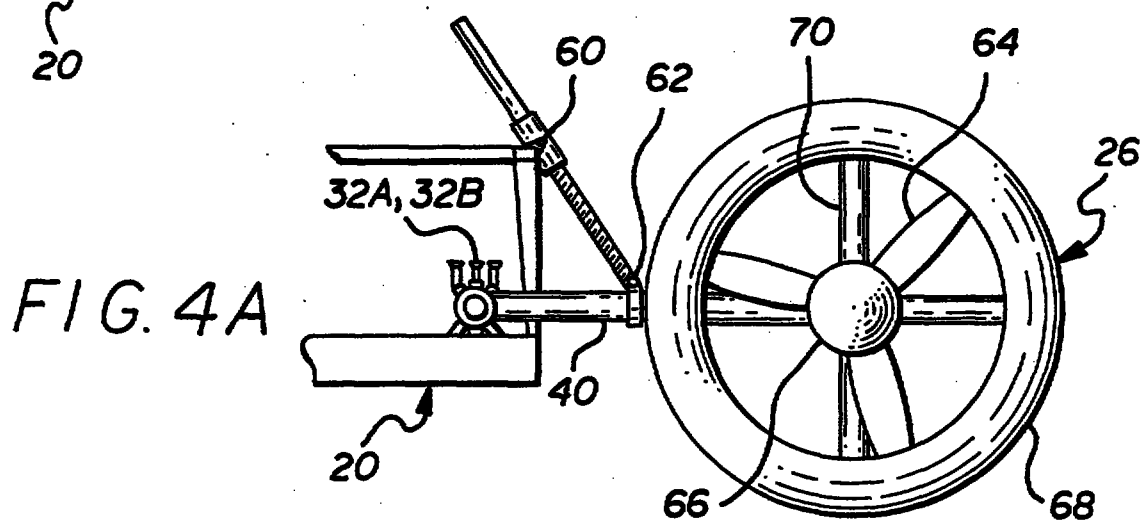
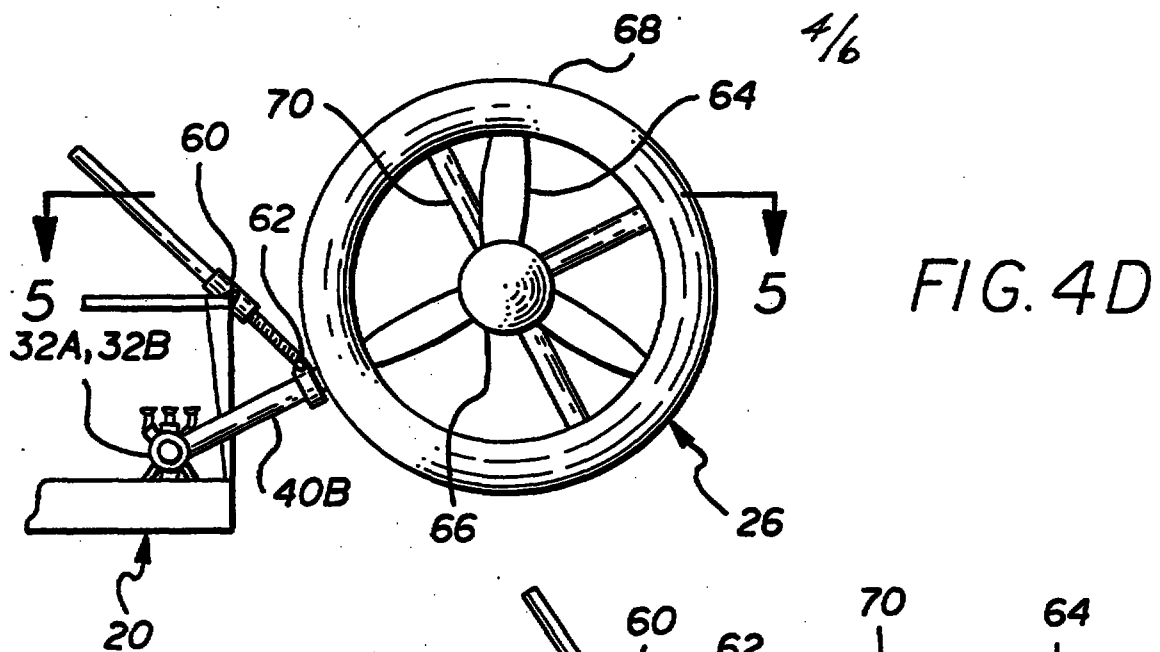
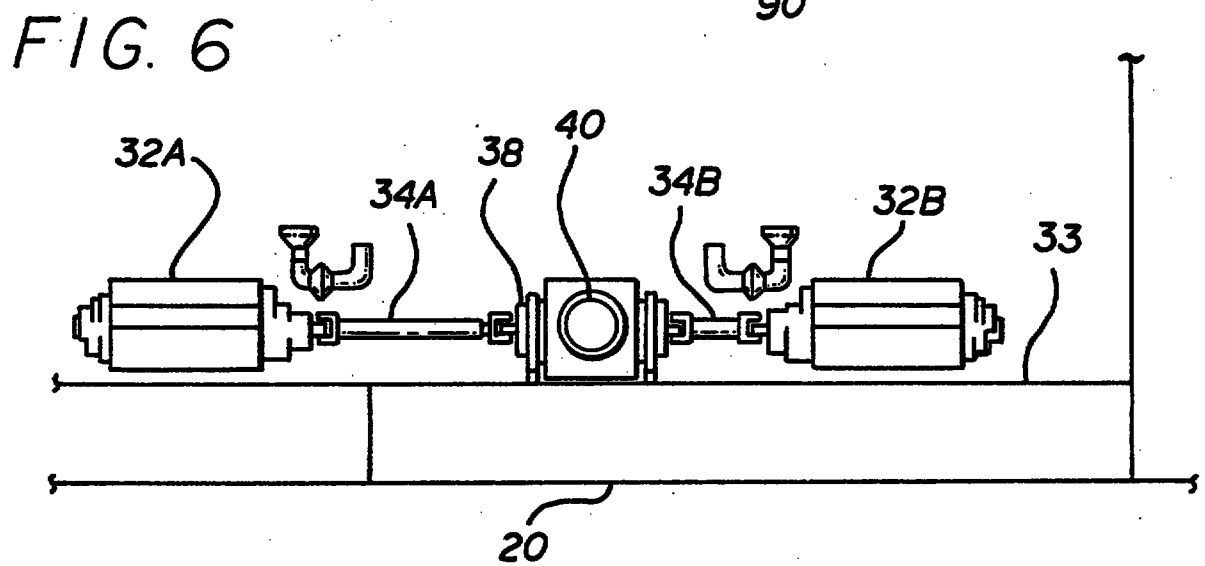
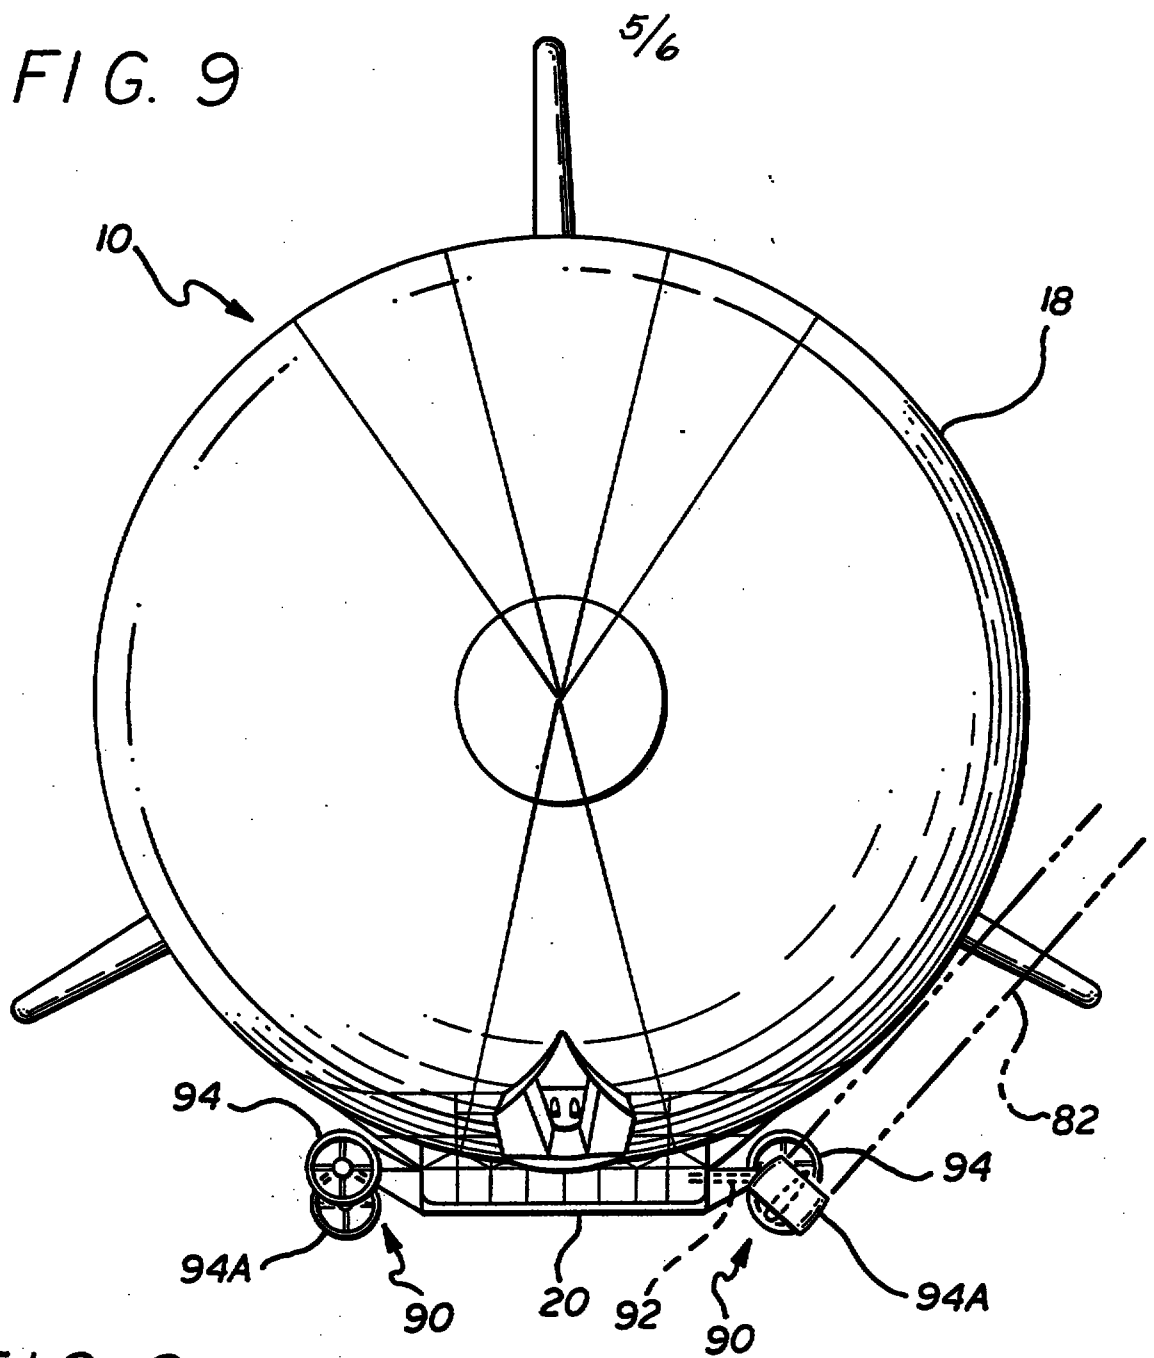


FIG. 5

FIG. 7








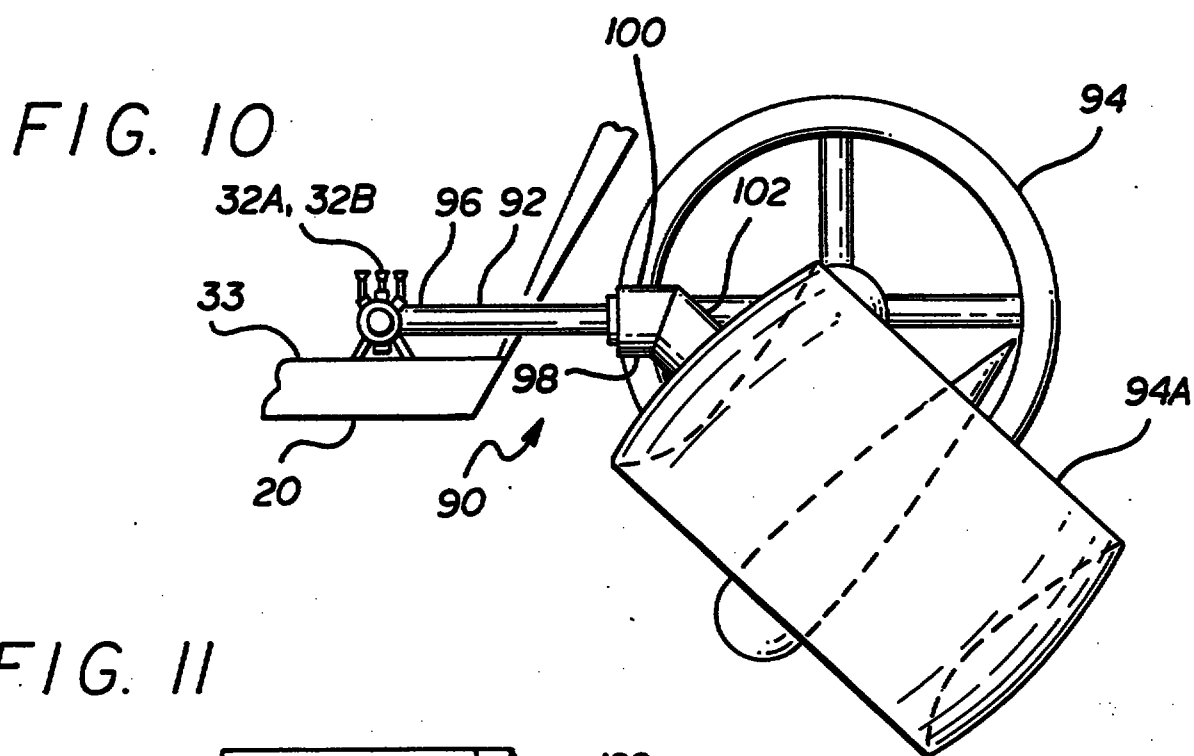


FIG. 11

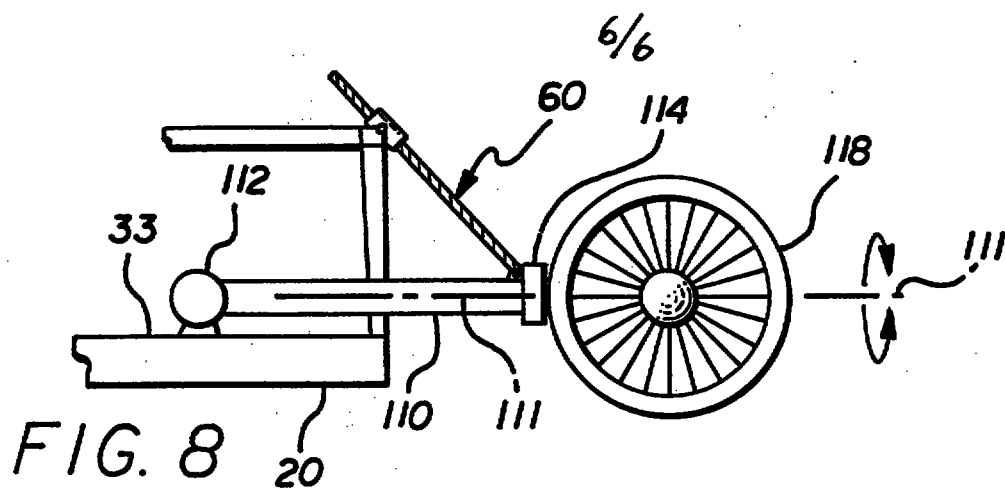