

WO 2070415 14/11/02

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 September 2002 (26.09.2002)

PCT

(10) International Publication Number  
WO 02/075728 A1

(51) International Patent Classification<sup>7</sup>: G11B 7/007

(21) International Application Number: PCT/IB02/00271

(22) International Filing Date: 29 January 2002 (29.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
01201019.5 19 March 2001 (19.03.2001) EP

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudsweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors: VAN WOUDEBERG, Roel; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). WIERENGA, Harm, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: DUIJVESTIJN, Adrianus, J.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: MULTILAYER RECORD CARRIER WITH SHIFTED RECORDING START AND STOP POSITIONS FOR THE RECORDING

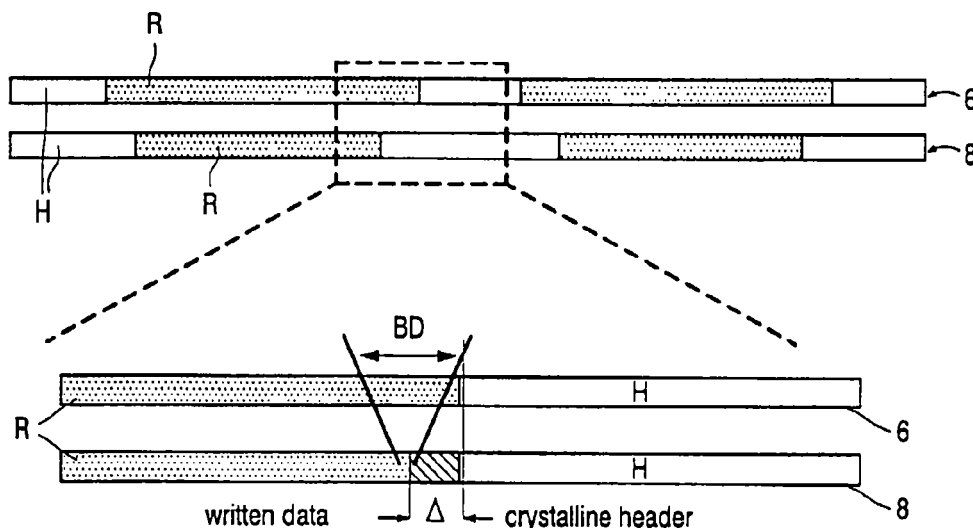

(57) Abstract: The present invention relates to a multilayer record carrier, to a recording apparatus and to a method of recording on such a multilayer record carrier, and to a manufacturing method, wherein start and stop positions of recording areas at header portions (H) are shifted in a lower recording layer (8) by a predetermined distance (?) such that recording and reading in/from the lower layer (8) is not affected by a variation in the transmittivity of the upper layer (6) at the transitions between the recording areas (R) and the header portions. The shifting may be obtained by extending gap portions or adding mirror areas to the header portions (H).

WO 02/075728 A1



\*162162\*



\*ACTION\*