

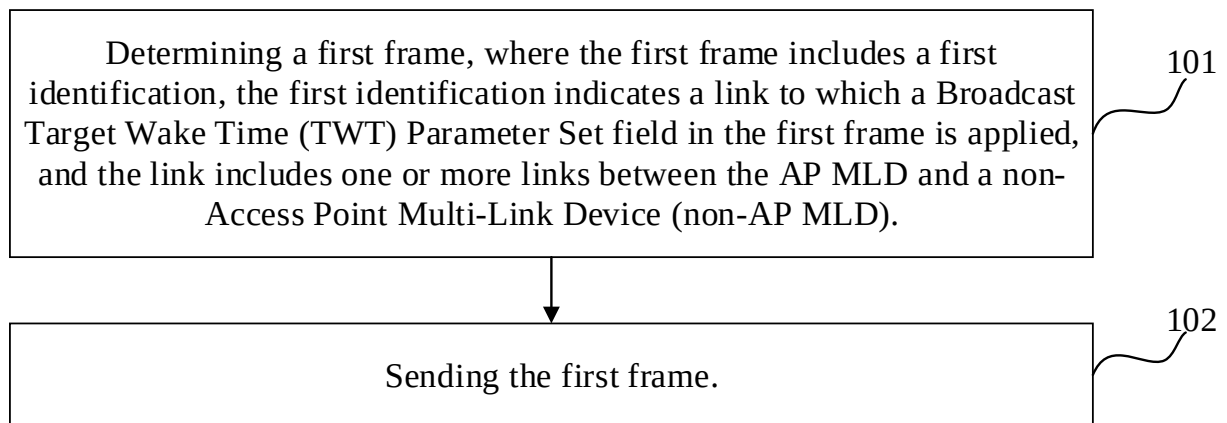


Fig. 1

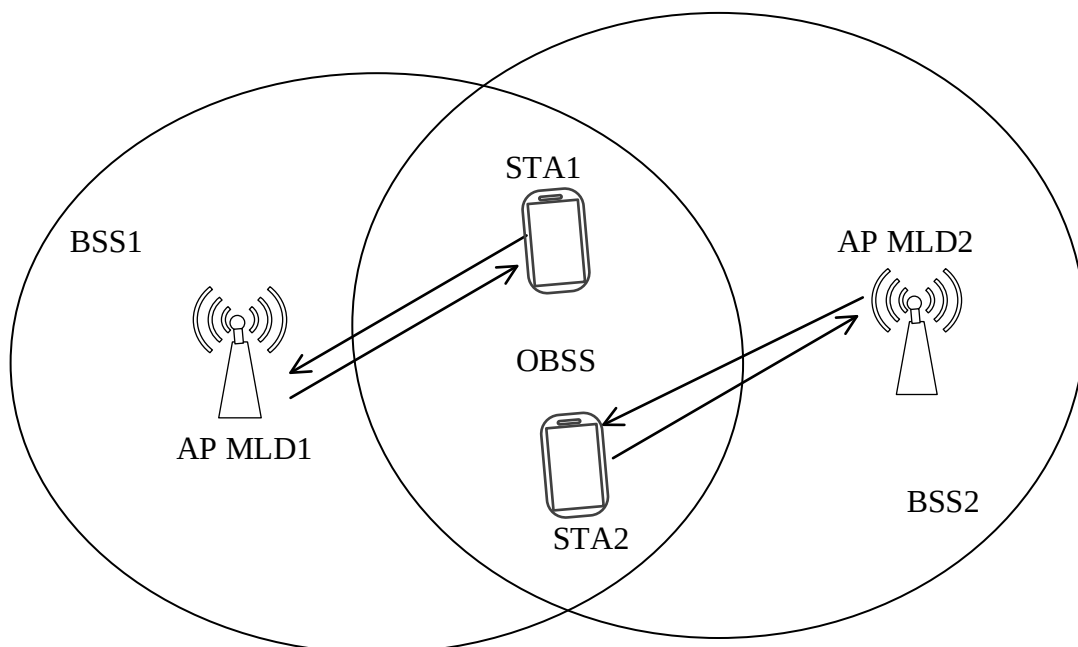


Fig. 2

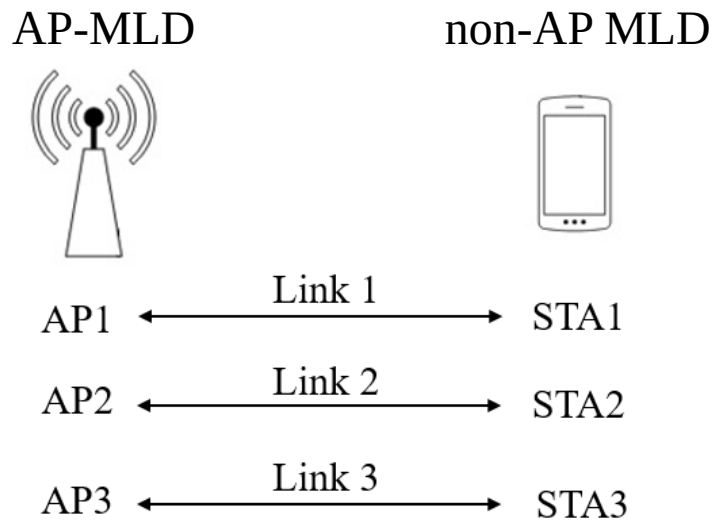


Fig. 3

Receiving a first frame, where the first frame includes a first identification, the first identification indicates the link to which the Broadcast TWT Parameter Set field in the first frame is applied, and the link includes one or more links between an Access Point Multi-Link Device (AP MLD) and the non-AP MLD.

401

Fig. 4

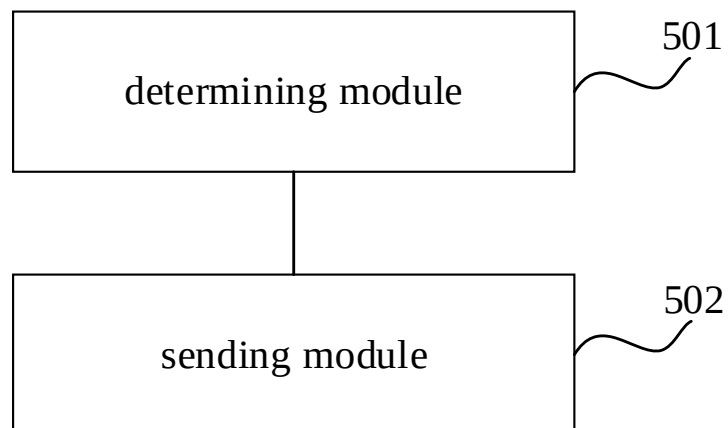


Fig. 5

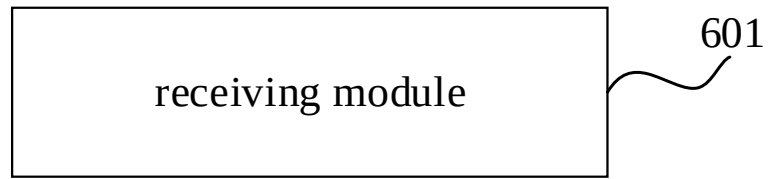


Fig. 6

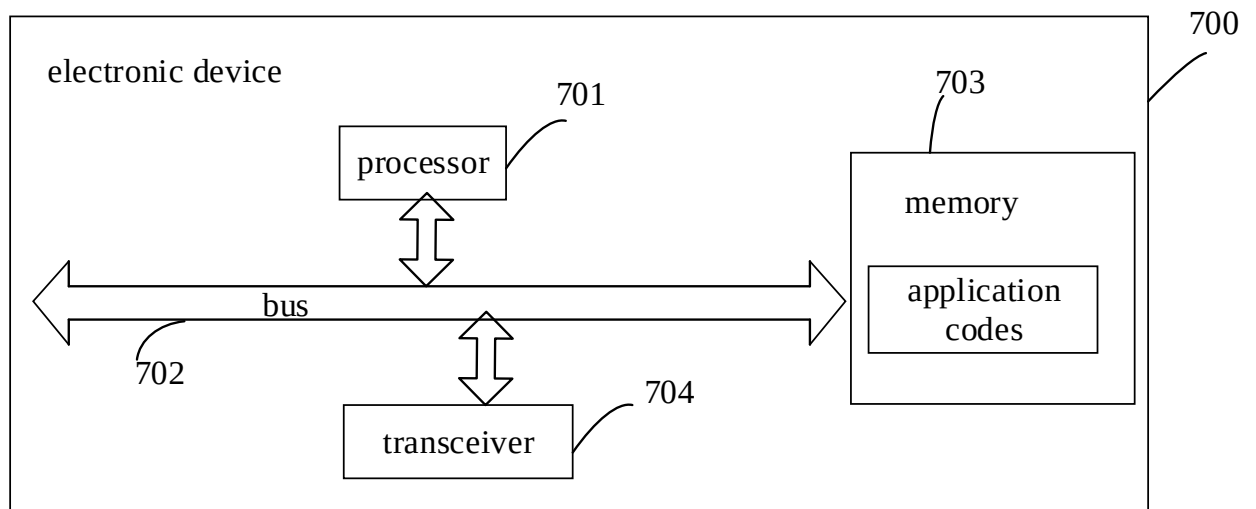


Fig. 7