



(51) International Patent Classification:
B23Q 3/18 (2006.01)

(21) International Application Number:
PCT/GB2009/001154

(22) International Filing Date:
8 May 2009 (08.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0810012.5 3 June 2008 (03.06.2008) GB

(71) Applicant (for all designated States except US): **ROLLS-ROYCE PLC** [GB/GB]; 65 Buckingham Gate, London, Greater London SW1E 6AT (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SWEETING, Paul, Philip** [GB/GB]; Rolls-Royce PLC, PO Box 31, Derby DE24 8BJ (GB).

(74) Agent: **GUNN, Michael, Alan**; Rolls-Royce PLC, PO Box 31, Derby DE24 8BJ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: **FIXTURE MEANS**

Fig.1

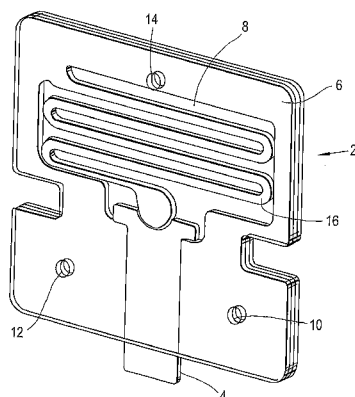

(57) Abstract: A tool or fixture having a locating device (2) for locating the tool or fixture on an article. The locating device is formed from a series of plates laminated together and having a spring element (16) and a catch element (4) where the catch element locates the tool or fixture in a machine bed. The catch element is retractable into the body (6) of the locating device to protect it from damage when the tool or fixture is being stored or transported.