

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015143 A3

(51) International Patent Classification⁷: **G01J 5/52**

(21) International Application Number:
PCT/IL2004/000714

(22) International Filing Date: 3 August 2004 (03.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
157344 11 August 2003 (11.08.2003) IL

(71) Applicant (for all designated States except US): **OPGAL LTD.** [IL/IL]; P.O. Box 462, Industry Zone, 20 101 Carmiel (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GRIMBERG, Ernest** [IL/IL]; 55 Keren Kayemet LeyIsrael Street, 27000 Kiryat Bialik (IL).

(74) Agent: **G. E. EHRlich (1995) LTD.**; 11 Menachem Begin Street, 52 521 Ramat-Gan (IL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: **RADIOMETRY USING AN UNCOOLED MICROBOLOMETER DETECTOR**

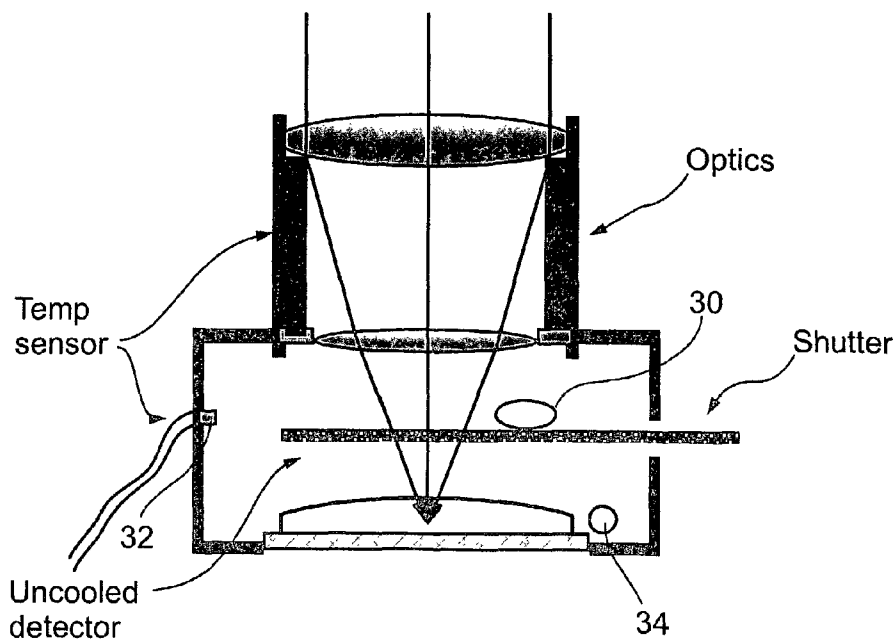

(57) Abstract: An infra-red imaging camera comprises focusing optics for gathering infra-red energy from an external scene, and an uncooled and unshielded detector arranged to detect infra red energy. Internal temperature sensing together with approximation of the temperature response of the camera provides a time varying calibration that allows the infra-red energy received at the detector to be used as a temperature measurement for objects in the camera's field of view.

WO 2005/015143 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

28 April 2005