

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



9900849-2
1905

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : E04B 1/61, 2/88, 2/96, E04F 13/08, 13/14, E04C 2/38		A1	(11) International Publication Number: WO 98/10151
			(43) International Publication Date: 12 March 1998 (12.03.98)
(21) International Application Number: PCT/AU97/00582			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 5 September 1997 (05.09.97)			
(30) Priority Data: PO 2159 5 September 1996 (05.09.96) AU			
(71) Applicant (for all designated States except US): JAMES HARDIE RESEARCH PTY. LIMITED [AU/AU]; 65 York Street, Sydney, NSW 2000 (AU).			
(72) Inventors; and (75) Inventors/Applicants (for US only): BADO, John, Joseph [AU/AU]; 558 Smithfield Road, Greenfield Park, NSW 2176 (AU). COTTIER, John, Sidney [AU/AU]; 84 Moons Av- enue, Lugarno, NSW 2210 (AU). ZARB, Joseph, Emmanuel [AU/AU]; Lot 203 Cartwright Street, Bonnyrigg, NSW 2177 (AU).			
(74) Agent: SHELSTON WATERS; 60 Margaret Street, Sydney, NSW 2000 (AU).			

Published
With international search report.

(54) Title: AN IMPROVED CLADDING BOARD MOUNTING SYSTEM

(57) Abstract

An improved cladding board mounting system for mounting cladding boards (100) adjacent a surface to be concealed. Each cladding board (100) includes at least one support member (130) on the interior face (120) of the cladding board. The system further includes at least one mounting member (170) which includes an engaging formation (172) adapted for releasable engagement with a complementary engaging formation (132) of a respective support member. The mounting member also includes a second segment (174) for releasable connection to the surface to be concealed. Preferably a mounting bracket (70) extends between the surface to be clad and the mounting member (170).

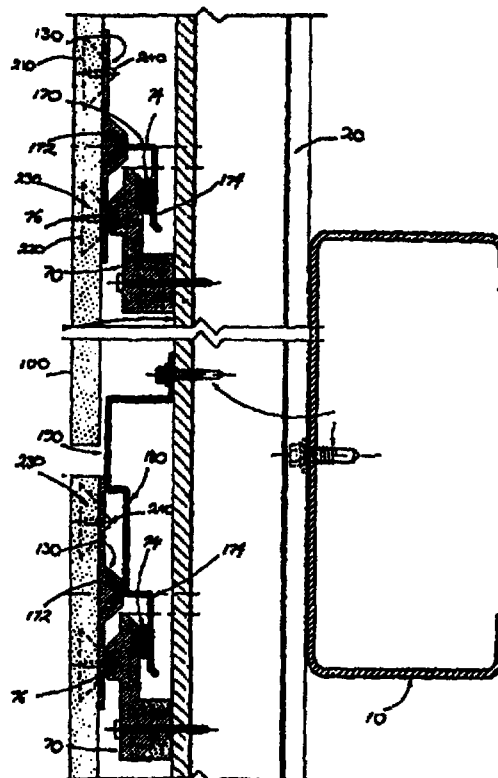

This Sheet Has Been Replaced

