



- (51) **International Patent Classification:**
E02F 7/10 (2006.01) *F16L 11/04* (2006.01)
- (21) **International Application Number:**
PCT/IB2014/058095
- (22) **International Filing Date:**
7 January 2014 (07.01.2014)
- (25) **Filing Language:** Dutch
- (26) **Publication Language:** English
- (30) **Priority Data:**
BE2013/0009 7 January 2013 (07.01.2013) BE
- (71) **Applicant:** BAGGERWERKEN DECLOEDT EN ZOON [BE/BE]; Slijkensesteenweg 2, B-8400 Oostende (BE).
- (72) **Inventor:** DURT, Dominique Maria Colette Hubert; Edmond Thieffrylaan 40, B-2640 Mortsel (BE).
- (74) **Agent:** BROUWER, Hendrik Rogier; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHOD FOR TRANSPORTING WATER COMPRISING SOIL PARTICLES THROUGH A PIPELINE AND FLEXIBLE PERIPHERAL BODY EVIDENTLY INTENDED FOR THE METHOD

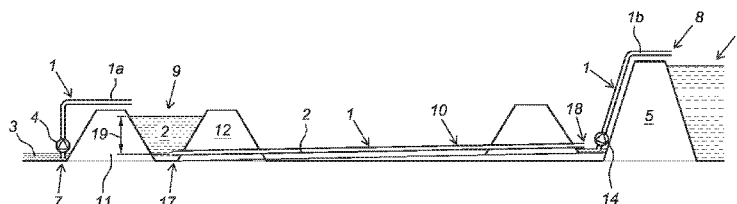


Fig. 2

(57) **Abstract:** The invention relates to a method for transporting water comprising soil particles through a pipeline, wherein a pressure difference is applied between an inlet and an outlet for the water. The pipeline comprises a flexible peripheral body with a length of at least 300 m manufactured from plastic foil, wherein the peripheral body can be brought from a substantially flat state, in which peripheral parts lie on one another, to an inflated state in which the peripheral body has a throughflow area of at least 0.15 m². The invention likewise relates to a method for laying a pipeline for transporting water comprising soil particles, and a flexible peripheral body evidently intended for the methods.