INFORMATION DISPLAY SYSTEM

FIELD OF THE INVENTION

The present invention relates to an information providing system and method using the Internet or the like, a terminal used in the information providing system, and a program-recording medium. The present invention is related to the below six Japanese patent applications. For those designated countries that permit incorporation of publications by reference, the contents of these six Japanese patent publications are incorporated herein by reference, as a part of the description of the present patent application.

1. Application No. 8-9521 filed on January 23, 1996.
2. Application No. 8-41104 filed on February 28, 1996.
3. Application No. 8-67278 filed on February 28, 1996.
4. Application No. 8-139689 filed on May 10, 1996.
5. Application No. 8-139690 filed on May 10, 1996.
6. Application No. 8-163679 filed on June 5, 1996.

BACKGROUND OF THE INVENTION

The Internet and other computer networks provide various kinds of information to users. In such kinds of information providing systems, a personal computer (terminal) of the user is normally connected to a host computer of an Internet provider or other network provider through a modem and a public communication network, such as a telephone network and ISDN. When a user accesses the information provider via the terminal, requested information is provided either from the Internet or the computer network or from the information provider. The information provided to the user's terminal is displayed on the terminal display. The user can watch the

displayed information (image), scroll the image or switch to a sub-menu by controlling the image.

The image provided from the information provider to the terminal is conventionally displayed in a single display area of the terminal. Newer terminals can display multiple images, such as an image provided from the information provider and terminal file information, to different windows. When the information provider provides images designated by the terminals, passive images such as advertisements are sometimes also provided. Since the images provided to the terminals are conventionally displayed in a single display area (for example, a single window), the passive images are conventionally inserted in the designated images and displayed in the same display area.

When the passive image is inserted in the same display area and the user updates the images in the terminal display by scrolling the screen or clicking a button in the image, the passive image may disappear. Moreover, the passive image may be hidden behind a display of the file information or the other information when the user displays the file information or other information on the terminal. Therefore, with the conventional systems, the display is operated in such a manner that the user does not always see the passive images, such as advertisements. Thus the passive images are not effectively transmitted to the users.

In addition, the passive images are conventionally transmitted to the terminal users randomly. As a result, the passive images could be provided to users who do not want the images or who would not make any response to the passive image. On the World Wide Web (WWW) of the Internet, only the information selected by the user is provided to the user. In

other words, information on the WWW is passively transmitted to the user based on the request from the user, and it was not possible for providers, which manage information providing systems, or other host computers to actively provide information to users.

In light of the background described above, it is an object of the present invention to provide an information display system and an information provider which accurately and effectively select and provide passive images, such as advertisements, while also providing the images requested by the user. It is also an object of the present invention to provide an information provider, through which providers on the World Wide Web (WWW) or other host computers can actively provide information while a terminal connected to the information provider selectively receives the passive image.

SUMMARY OF THE INVENTION

To achieve these objects, the present information display system has an information provider, a communication line connected to the information provider, a display, and a display controller which receives an active image (specified image) and a passive image (passive image) from the information provider through the communication line. The information display system displays the active image and the passive image in separate areas of the display.

According to the invention, upon a request from the terminal to the information provider for transmitting active images, the specific active images and passive images are sent to the terminal from the information provider. The active images and the passive images received by the terminal are separately and independently displayed in different

display areas of the terminal by the display controller.

Therefore, the active images that the terminal user requests are independently displayed in the corresponding display areas on the display of the terminal. Moreover, because the passive images, such as advertisements, are separately displayed in a display area other than that in which the active images are displayed, the passive images are independently displayed in the display area even if the active images requested by the user are changed in the active image display area.

As a result, the passive images, which have not been intentionally requested by a user (passive images) such as advertisements, are effectively provided while the images intentionally requested by a user (active images) are also provided to the user. The passive image or the window of the passive image is displayed in the front of the display area. In addition, the whole passive image is displayed within the display area. As a result passive images such as advertisements, can be effectively transmitted to the user and the user is effectively made aware of them. In addition, such display control can be accomplished through functions of the OS (operating system), such as Windows95 ™ of Microsoft Corporation ™.

By the operation of the user or of a program installed in the terminal, the passive images may be hidden behind other images or may appear outside the display area, independent of the control of the display controller. The information display system has a detector, which detects whether or not the passive image is in the normal position. The normal position is where the whole passive image is displayed in the front of the display area. When the detector

detects the passive image not in the normal position, the notifier provides notice of this.

The information display system may further detect the passive image to be not in a normal position where the passive image is hidden behind other images or has been moved outside the display. In either of these cases, the notifier notifies the user and the user is forced to change the display status (position) of the passive image to normal. The notifier may display the notice on the display.

The present invention also has a display delayer which delays updating the active images when the detector detects that the display status is not normal after a predetermined period of time has elapsed since notification. Further, the updating of the active images is suspended when the detector detects an abnormal status after a predetermined period of time has elapsed since the update was delayed. The communication between the information provider and the terminal may be disconnected when the detector detects the abnormal condition after a predetermined period of time since the update was suspended.

Therefore, when the passive images are not brought back to normal status during a predetermined period of time after the notice is given, the update of the active images requested by the user is delayed by the display delayer, which makes it difficult for the user to browse active images. Further, if the passive image has still not been returned to a normal status during a predetermined time after the delay begins, the active images are suspended and the user can no longer browse new active images. Finally, if the passive images are not brought back to normal status during a further predetermined period of time, the communication

between the information provider and the terminal is terminated. In this case, the user cannot obtain the requested images at all. Thus, according to the present invention, when the passive images are not in the normal status, the user receives a series of warnings that he or she has to change the status to normal.

The present invention may comprise a detector which detects whether the passive image is in a normal status where the whole passive image is displayed in the front of the display area, and a display delayer which delays the updates of the active images when it detects that the passive image is not in a normal status. The active images update is delayed by delaying the normal transmission of the active images from the display information provider to the terminal. Such a delay of the transmission is accomplished by transmitting error information to the terminal from the information provider.

The error may be sent at a certain rate within responses to the transmission requests received from the terminal. The active images can be updated. The information display system detects whether the passive image is in a normal status where the whole image is displayed in the front of the display, and suspends updating the active images when the passive image is not in a normal status. The information display system may detect whether the passive image is in a normal status where the whole passive image is displayed in front, and terminate the communication between the information provider and the terminal when the image is not in the normal status.

The display suspender suspends updating the active images by suspending the transmission of the active images from the information provider to the terminal. Such

transmission suspension is accomplished by transmitting error information to the terminal from the information provider in response to a request for the transmission from the terminal. The present invention further cancels the delay or the suspension of the active images when the display of the passive images becomes normal within the predetermined period of time of the delay or the suspension.

In addition, in the present invention, if the terminal comprises a display memory which stores the displayed contents of the display, the detector determines whether the passive images are in the normal status by determining whether the contents of the display memory in the display area of the passive images match the passive images transmitted from the information provider. From this, an accurate determination is made whether the passive images are in the normal status.

The information provider may have an image database which stores the passive images and the display condition of each passive image. Each passive image is transmitted to the terminal according to the display condition of the passive image. As a result, each passive image is provided to the user terminal with the requested display condition. The display condition of each passive image stored in the image database may include user information, which indicates users to whom each passive image should be displayed. The information provider transmits the passive image appropriate to the user based on user information stored in a user database and image database.

While the requested images are provided to the user as described above, the passive images corresponding to the , user's age, sex, etc. can be effectively provided. The user

information may include the age, sex, marital status, occupation, and address of the user.

The display condition of each passive image in the image database includes an individual display limit for each user. The information provider counts the transmissions of each passive image to each terminal and prevents the transmission of the passive image to the terminal when the transmission count reaches the individual display limit for the terminal. Therefore, each passive image is provided to the user a certain number of times less than the display limit, avoiding the situation where the same passive image is provided many times. By setting the display limit to a fixed number of display times within a predetermined period, the same passive image is not provided to the user many times in any predetermined period.

The display condition of each passive image in the image database includes a display transmission time of each passive image. The information provider transmits the passive image at the display transmission time. Thus, each passive image can be provided to the terminal user by transmitting it to the terminal at the requested display transmission time. Therefore, according to the present invention, the passive images (passive image), such as advertisements, can be effectively recognized by and provided to the user while the requested images (active images) are also provided to the users. Meanwhile, the passive images corresponding to the age and sex classifications of the user can be effectively provided.

In another aspect of the invention, an information provider transmits a plurality of types of images to a terminal with a display, using a communication line to which

the terminal can be connected. The information provider comprises means for receiving a request from the terminal for an active image actively designated by the user of the terminal, means for selecting the active image designated by the user from among the plurality of types of information based on the user's request, means for selecting a passive image to be displayed on the terminal regardless of the presence of active designation by the user from among the plurality of types of information, and means for transmitting both the active image and the passive image to the terminal to have these images displayed on the terminal.

In still another aspect of the invention, a recording medium is provided, which stores a program for operating a terminal having a display and a means for connecting the terminal to a communication line. The program acting on the terminal comprises means for causing the terminal to connect to an information provider that can transmit a plurality of images, means for causing the terminal to transmit a request for an image actively designated by the user (referred to as an active image) to the information provider, means for causing the terminal to receive the active image selected, based on the request, from among the plurality of images from the information provider, means for causing the terminal to receive an image to be displayed on the terminal regardless of the active designation by the terminal user (referred to as an passive image), and means for having both the active and passive images be received from the information provider and displayed on the terminal.

In still another aspect of the invention, a terminal having a display and a means for connecting the terminal through a communication line to an information provider that can transmit a plurality of images are provided. The terminal

comprises means for transmitting a request for an image actively designated by the user of the terminal to the information provider, means for receiving the active image selected, based on the request, from among the plurality of images from the information provider, means for receiving an image to be displayed regardless of the presence of active designation by the user from the information provider, and means for displaying both the active and passive images.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a total system structure of the information display system according to an embodiment of the present invention.

Fig. 2 is a block diagram of the main body 7 in Fig. 1.

Fig. 3 shows the data structure of the message database of the information provider 4 in Fig. 1.

Fig. 4 shows the data structure of the user database of the information provider 4 in Fig. 1.

Fig. 5 is a functional block diagram of software of the terminal 1 in Fig. 1.

Fig. 6 shows a display 8 of the terminal 1 in Fig. 1.

Fig. 7 shows a format of message data stored in the terminal 1 in Fig. 1.

Fig. 8 is a mechanical block diagram of the information provider 4 in Fig. 1.

Fig. 9 is a total limit number management file of the information provider 4.

Fig. 10 is an individual limit number management file of the information provider 4.

Fig. 11 is a flow chart of the terminal 1 in Fig. 1.

Fig. 12 is a flow chart of the terminal 1 in Fig. 1.

Fig. 13 is a flow chart of the terminal 1 in Fig. 1.

Fig. 14 is a flow chart of the terminal 1 in Fig. 1.

Fig. 15 is a flow chart of the terminal 1 in Fig. 1.

Fig. 16 is a flow chart of the terminal 1 in Fig. 1.

Fig. 17 is a flow chart of the information provider 4.

Fig. 18 is a flow chart of the information provider 4.

Fig. 19 is a flow chart of the information provider 4.

Fig. 20 is a flow chart of the information provider 4.

Fig. 21 is a flow chart of the information provider 4.

Fig. 22 is a flow chart of the information provider 4.

DETAILED DESCRIPTION OF THE PREFERED EMBODIMENT

Fig. 1 shows the structure of the information display system in the present embodiment. In this information display system, the terminal 1 of the user is connected to a public network 3 through a modem 2. The information provider 4 has a computer system of the provider is also connected to the public network 3 through a gateway 5 and a modem 6. The terminal 1 and the information provider 4 can communicate through the public network 3. The terminal 1 is has a personal computer, for example, which comprises a main unit 7 connected with the modem 2 and a display 8. Fig. 1 shows only a single body for the terminal 1. However, a plurality of terminals 1 may be connected to the information provider 4 through public network 3.

The information provider 4 has an Internet gateway 10, which is connected to the Internet 9. The terminal 1 can be connected to the Internet 9 through the Internet gateway 10 and obtain information from the Internet 9 by accessing the information provider 4. The Internet gateway 10 and the gateway 5 work as a router. The information provider 4 has a message database 12 which stores image data of the passive images (referred to as messages) such as advertisements, and information such as the transmission condition of the passive

images.

The information provider also has a message manager 11 which provides the messages to the terminal 1, an image database and a user database 13. The information from the Internet 9, that is, information designated and supplied to the display according to the user's request, is referred to as active images. On the other hand, the messages, which are automatically supplied to the terminal even if not designated by the user, are referred to as passive images.

Fig. 2 is a block diagram of the terminal 1 of Fig. 1. CPU 40 starts running with the program stored in ROM 42. FD drive 52 and CD-ROM drive 54 read the program or data from floppy diskette 56 and CD-ROM 58, respectively. The CPU 40 installs the program provided by the recording medium, such as the floppy diskette 56 or CD-ROM 58, into the hard disc drive 50, and further reads it out on the RAM 44 for execution. Timer 46 counts a period of time set by the CPU 40, and when the given time has passed, informs the CPU 40 that the time has run out. The calendar IC is backed up by the battery, and supplies the current date and time to the CPU 40. Input device 48 inputs data from the user of the terminal 1.

Fig. 3 shows the structure of the message database 12. The message database 12 stores a message ID, message transmittal condition (type of individual limit, individual limit, type of total limit, total limit, display date, age range, sex, marital status, occupation, and address in Fig. 3) and image data for each message.

The message ID shows an identification of each message. The message transmittal condition data is valid only for when the message is to be selected using the condition. The type

of the individual limit indicates the setting of the display limit (the time period for which the display limit applies) when the number of display times for displaying the message to each terminal 1 user (the display limit for transmitting and displaying each message to one terminal 1) is provided. For example, "days" or "months" is shown when the display limit is provided for each day or each month. When the period for which the display limit is not provided, is not designated, "total" is indicated in the table. Then the display limit, with which the message is displayed for each terminal 1 user means the total number limit.

The type of the total limit number indicates the time period of the total limit number (the total number of times each message may be transmitted from the information provider 4 to each terminal 1). For example, when the total limit is provided for each day or each month, "day" or "month" is written. When the period for the total display limit is not designated, "total" is written. The requested total limit for displaying the message to each terminal 1 in each period is written as the total limit.

The display time column shows a designated date (e.g., 1996.1.1, 12:00) when the date to display each message is designated. The age range column shows the age range (e.g., 18-22) when the age range of the user of terminal 1 to whom each message is displayed is restricted. The sex column shows the sex of the user (male or female) when the sex of the user to whom each message is displayed is restricted. When the group of terminal 1 users to whom each message is displayed is restricted on the basis of marital status, data indicating married or single is given in the marital status column.

In the occupation column, the type of occupation (e.g., salary man or student) is given when the group of terminal 1 users to whom each message is displayed is restricted based on occupation type. An address (e.g., Tokyo or Kanagawa-ken) is given in the address column when the group of terminal 1 users to whom each message is displayed is restricted based on address. Image data for each message is given in the image time column.

Fig. 4 shows the structure of the user database 13. The user database 13 stores information relating to the user of the information provider 4. More specifically, the user ID, password, date of birth, sex, marital status (married or single), occupation, and address of each user is stored. Here, in the columns for the user ID and the password, the identification of each user of terminal 1 connected to the information provider 4 and the password required to access the information provider 4 from each terminal 1 are given. In the columns for the date of birth, sex, marital status (married or single), occupation, and address, information corresponding to each item is given.

The information provider 4 is accessed from the terminals 1 and transmits each message to each terminal 1 according to the designated conditions based on the message database 12 and the user database 13 when providing the information from the Internet 9. In addition, the information provider 4 can transmit to the terminal 1 emergency messages, such as earthquake information, besides normal messages, such as advertisements.

Fig. 5 is a block diagram showing the structure of the main unit 7. Software necessary for communicating between the information provider 4 and the Internet 9 is installed in

the terminal 1. The main unit 7 has an Internet access manager 14, which controls the reception of data with the Internet 9 through the information provider 4, the TCP/IP driver 15, a PPP driver 16, a serial driver 17 for receiving data through the modem 2, and a display controller 18 for controlling the display 8 of the terminal 1.

Fig. 6 shows an example of the display 8 controlled by the display controller 18. When accessing (requesting) the Internet 9 through the information provider 4, the display controller 18 controls the display 8 to show the messages automatically provided from the information provider 4 (referred to as passive images, or messages) and images actively selected by the user (referred to as active images), obtained from the Internet 9. The active images obtained from the Internet 9 are referred to as Internet images. As shown in Fig. 6, the Internet images and the messages are displayed in separate display areas "a" and "b" in the display 8. The whole message is displayed in the front most window within the display 8.

Fig. 7 shows the structure of the message that the terminal 1 receives from the information provider 4 together with the Internet images. The message has a message identification, a message type which shows the type of the message, such as an earthquake warning requiring emergency display or a particular message designated for a particular display date, and the image data of the message. The terminal 1 receives, into a memory not shown in the figure, a plurality of the messages in a queue format from the address indicated by the top pointer of the queue up to the address indicated by the last pointer of the queue . The display controller 18 displays the images successively, starting from the first in the queue onto the display 8 every predetermined

time period.

In Fig. 7, the word "Previous" indicates the memory address of the previous message in the queue. The word "Next" indicates the memory address of the subsequent message in the queue. The transmission of each message from the information provider 4 to the terminal 1 is executed in the same queue format as that described above.

In Fig. 5, the display controller 18executes the display control described above or the like. In the display controller 18, the transmission request counter 19 keeps track of the messages received from the information provider 4. The check level memory 20 stores the check level indicating how long the images are not in the normal status, normal status being where the image data of each message is displayed in the front on the display 8 and the whole message is within the display 8. The display timer 21 measures the predetermined time for displaying each message. The check timer 22 measures the period of the abnormal message status. The notifier 23 displays a notice on the display 8 when the message status is abnormal. The detector 24 detects whether the status of the message on the display 8 is normal.

The display detector 24 detects whether the status of the message display is normal or abnormal by detecting whether the data of a display memory (VRAM) of the display 8 in the display area of the message at the display 8 match the image data of the whole message from the data of the VRAM. In the transmission request counter 19, the count value is increased by 1 each time the terminal 1 requests message transmission from the information provider 4 , and is decreased by 1 each time message display in the queue to the display 8 is completed.

The check level which the check level memory 20 stores is set to "0" (zero) when the status of the message displayed in the display 8 becomes abnormal. The value of the check level is increased by 1 each time the abnormal status persists for a time (predetermined time) of the check timer 22. In addition, the notifier 23 displays a notice on the display 8 when the abnormal status persists for the predetermined time of the check timer 22 after setting the check level memory 20 to 0 (zero).

Fig. 8 shows the message manager 11 of the information provider 4. The message manager 11 has an Internet information transmission controller 25 which manages the transmission of the Internet image from the Internet 9 to the terminal 1, a message selector 26 which selects the message for the terminal 1 based on the information from the message database 12 and the user database 13, and a transmission database 27. The transmission database has files storing the display times (transmission times) when the display limit or the total display limit is designated.

The Internet information transmission controller 25 has a display delayer 28, which delays updating the Internet images provided to the terminal 1. The display suspender 29 suspends updating the Internet images. The communication disconnector 30 disconnects (terminates) the communication between the information provider 4 and the terminal 1. The transmission database 27 has a total limit management file shown in Fig. 9 for counting the display times (transmission times) of the message, the total limit of which is designated. The transmission database 27 also has an individual limit management file shown in Fig. 10 for counting the display times (transmission times) of each

message for each user (each terminal 1).

Fig. 9 shows the total limit management file having columns for message ID, type of the total limit, time stamp, and display counter which holds the total display limit, for each message. In the columns for the message ID and the type of the total limit, the identification and the settings ("days", "months", or "total") for the total limit stored in the message database 12 are stored when the message to which the total limit to display is designated is transmitted for the first time. In addition, in the column for the time stamp, the time stamp at the time of the transmission is stored corresponding to the setting for the total limit to display. For example, if the setting of the total limit to display is per day or per month, the date (e.g., 1996.1.1) or the month (1996.1) at the time of the first transmission is stored as the time stamp. If the setting for the total limit to display is not designated, the time stamp is set as "0" (zero). In the display counter column, the number "1," which indicates the first transmission, is stored at the time of the first transmission of the message to which the total limit to display is designated.

The individual limit management file in Fig. 10 has the user ID, the type of the individual limit, the time stamp, and the display counter which holds the number of transmissions of the message for which a limit to display to each user (each terminal 1) is designated. In the user ID column, the identification of the terminal 1 user to whom the message is transmitted is stored at the time of the first transmission based on the user database 13.In addition, in the columns for the type of the individual limit, the time stamp, and the display counter, the setting of the limit ("day", "month", "total"), the corresponding time stamp (date

of the transmission), and the number of transmissions are stored, respectively, in similar fashion as the total limit control file. This individual limit management file is created for each message for which a display limit to each user (each terminal 1) is designated.

Fig. 11 through Fig. 16 show the operation of the terminal 1. When the user of the terminal 1 completes the process of logging on to the information provider 4 to get the requested information from the Internet 9 (YES at S101), the display controller 18 will transmit requests for transmitting messages to the information provider 4 until the count value of the transmission request counter 19 reaches the limit of requests for simultaneous transmissions. The transmission request counter 19 is incremented for each transmission (S102-S104).

When the count value of the transmission request counter 19 reaches the predetermined limit of requests for simultaneous transmissions, the display controller 18 waits until the message is received from the information provider 4 (S105). The received message is displayed in the display 8 of the terminal 1 when the message is received (S106). The received message is stored at the top of the queue as described in Fig. 5. The message at the top of the queue is taken and displayed in the display 8 of the terminal 1. In parallel, the Internet images requested by the terminal 1 user are also transmitted from the information provider 4 to the terminal 1 separately from the messages. Then the Internet images and the messages are displayed in separate display areas a and b in the display 8 as shown in Fig. 4.

In Fig. 12, the display controller 18 determines whether the message has been additionally received (S108) after

setting (starting) the display timer 21 (S107). When not received, the process goes to S117. When the messages (passive images) are received at S108, message type (Fig. 7) is determined. The message type shows whether it is emergency information, such as earthquake information (S109). If the received message is an emergency message, the emergency message is displayed on the display 8 (S111) after the message being displayed in the display 8 is returned to the top of the queue (refer to Fig. 7) (S110). The display controller 18 resets the display timer 21 (S112). Then the display controller 18 sets (starts) the display timer 21 again (S113) and goes to S117.

If the received message is not an emergency message at S109, the display manager 18 determines whether the display time is designated by the message (S114). If the display time is designated, the message is added to the end of time designated message and before the other messages (S115). If the display time is not designated by the received message, the message is added behind the last message in the queue (S116) and the process goes on to S117.

Referring to Fig. 13, at S117, the display controller 18 determines whether the predetermined time of the display timer 21 has run out, that is, whether the message has been displayed in the display 8 for the predetermined time. If the message has been displayed in the display 8 for the predetermined time and the display timer 21 is timed out, the process determines whether the queue is empty (S119) after transmitting a signal indicating the message display completion to the information provider 4 (S118). If the queue is not empty and if the message transmitted from the information provider 4 is stored, the message at the top of the queue is read and displayed on the display 8 (S120).

Then the display timer 21 is set (started) (S121), and the transmission request counter 19 is decreased (S122) and the process goes on to S126.

The message in the display 8 is erased when the new message is displayed. If the queue is empty and the message transmitted from the information provider 4 is not stored, the display controller 18 displays a predetermined idle message in the display 8 and the process goes on to S126.

If the display timer 21 has not been timed out in S117, and if the message has not been displayed for the predetermined time, the display controller 18 determines whether the idle message is displayed in the display 8 (S124). If the idle message is not being displayed in the display 8 (and if the message transmitted from the information provider 4 is displayed), the process goes on to S126. If the message being displayed is the idle message, it is then determined whether the queue is empty (S125) . If the queue is not empty and the message transmitted from the information provider 4 is kept, the process goes through S120 to 122, and the message at the top of the queue is displayed on the display 8. The display timer 21 is set and the transmission request counter 19 is decreased. If the queue is empty at S125, the process goes on to S126.

In S126, the display controller 18 determines whether the sum of the count of the transmission request counter 19 and the number of the messages in the queue is less than the simultaneous transmission limit. If it is less than the simultaneous transmission limit, a transmission request is sent to the information provider 4 (S127), the transmission request counter 19 is incremented (S128) and the process goes on to S130. If the sum of the transmission request counter

19 and the number of the messages in the queue exceeds the simultaneous transmission limit, the process goes on to S130 without requesting the transmissions to the information provider 4.

With the process described above, the messages transmitted from the information provider 4 are stored in the queue of the terminal 1 successively according to the request for the transmission to the information provider 4. Each message is successively displayed for each predetermined time in the display area b in the display 8 independently from the Internet images for each predetermined time. Moreover, emergency messages are displayed immediately after being received. Time designated messages for which display times are designated are displayed in the display 8 shortly after being received.

Because each message is displayed in the independent display area a in the display 8, displaying the message does not get affected even if the Internet image is updated by scrolling the Internet image displayed in the display 8 with the message by the terminal 1 user or by changing the display menu, and the user is effectively made aware of each message .

Referring to Fig. 14, in S130, the display controller 18 determines whether the whole message is within the display 8, through, for example, a function of an OS (operating system) provided in the terminal 1. When the user moves a part of the message outside of the display 8, the whole message is forcibly moved back into the display 8 by a function of the OS (S131). For example, Windows 95 ™ of the Microsoft Corporation ™ can be used as an OS having such functions. When the whole message is within the display area, the

process goes to S132.

The display controller 18 determines whether the message is the frontmost message on the display 8 (S132), through a function of the OS. If the message is not displayed in front because Internet images are moved in front of the message or other file data or the like is displayed in front of the message, the whole message is forcibly displayed in the front of the display 8 by a function of the OS in the terminal 1 (S133). When it is determined that the message is displayed on the frontmost surface of the display 8, the process goes to the S134.

With the process described above, the message is displayed in the display 8 and at the frontmost surface of the display 8 (normal status), and the user is effectively made aware of each message . However, when a special operation from the terminal 1 is executed by the user, or when a special application software is run by the terminal 1 (e.g., a software which applies a false image of the display 8 to the display controller 18), a situation occurs where despite the fact that the status of the message display is not normal, it is understood as normal status, and the processes S131 and S133 are not executed. To eliminate such cases, the display controller 18 executes the following processes.

Referring to Fig. 15, after the processes S130 through S133, the display controller 18 determines whether the check timer 22 is being operated (S134). At this time, the check timer 22 is normally not operated. In that case, at S135, a determination is made by the display detector 24 as to whether the received image data of the message being displayed matches the contents of the display memory (VRAM)

for the display 8 in the display area of the message. If the actual display of the message is not normal status, then a match obtains, resulting in a repeat of the process by returning to S108.

At S134, if the image data of the message and the contents of the VRAM do not match, and if the actual status of the message display is determined to be abnormal, the check level stored by the check level memory 20 is set to "0" (zero) (S136), and the process returns to S108 after setting (starting) the check timer 22(S137). Here, a state where the check level is 0 shows that the actual status of the message display has changed from normal to abnormal.

When the check timer 22 is being operated at S134 (YES at S134), the display controller 18 determines by the display detector 24 whether normal status obtains, in which the image data of the message and the contents of the VRAM match(S138). If it is determined that abnormal status obtains, a determination is made as to whether the check timer 22 has timed out (S139). If the check timer 22 has not timed out, the process returns to S108. On the other hand, if the abnormal status of the message has continued for more than the predetermined time of the check timer 22 (YES at S139), the display controller 18 determines whether the check level stored in the check level memory 20 is "0" (S140). If the check level is 0, a notice is displayed on the display 8 by the notifier 23 (S141). Therefore, the actual status of the message display is changed from normal to abnormal by the display controller 18. If the abnormal status continues for the time of check timer 22, a notice is displayed on the display 8. The user of the terminal 1 is notified that the display status is normal .

After the display controller 18 displays the notice in the display 8, if the user confirms it and hits the "OK button" (S142), the display controller 18 clears the display of the notice (S143), and the check level in the check level memory 20 is incremented to "1" (S144). Then the check timer 22 is set (started) again (S145), and the process returns to the S108.

Referring to Fig. 16, if, despite the display of the notice, the abnormal display of the message continues and if the time of the check timer 22 after the display of the notice is elapsed in this condition, "NO" (check level not 0) is determined at S140. In this case, the display controller 18 determines whether the check level is "1" (S146). If the check level is 1, a level-1 event indication is sent to the information provider 4 (S147). The check level in the check level memory 20 is incremented to 2 (S148). Then the check timer 22 is set again (S149), and the process returns to S108. Thereafter, as long as the abnormal status of the message persists, the check level is incremented by 1 every time the check timer 22 times out until it eventually becomes 4, and a level-2 event and a level-3 event are transmitted to the information provider 4 each time it is incremented (S150-157). When a level-1 event is transmitted after a level-3 event to the information provider 4, Internet images from the information provider 4 to the terminal 1 are delayed or the communication between the terminal 1 and the information provider 4 is disconnected.

On the other hand, if the display status of the message returns to normal during the operation of the check timer 22 (YES at S134), and if the display detector 24 detects it at S135, the display controller 18 resets the check timer 22 (S158) and determines whether the current check level is

either 0 or 1 (S159). At this time, if the check level is either 0 or 1, the process returns to S108. If the check level is not 0 or 1, that is, if the check level is 2, 3, or 4, the process returns to S108 after transmitting a recovery event indicating that the transmission of the Internet images has returned to normal (S160). In that case, because the check timer 22 stops, it becomes NO at S134, and the check level does not increase as long as the display status of the message is kept normal.

Figs. 17 to 22 are flowcharts describing the operation of the information provider 4. When each terminal 1 logs in (S201), the message manager 11 in the information provider 4 first obtains the information of the terminal 1 user from the user database 13 (S202) and then starts an initial transmission request waiting timer (S203). If the transmission request is not received from the terminal 1 before the initial transmission request timer times out, due to communication errors, the communication with terminal 1 is disconnected (S204-S206). If the terminal 1 receives the request for the transmission, an initial message set in advance is transmitted to the terminal 1 (S207). This initial message is displayed on the display of the terminal 1 to provide notice that normal communication with the terminal 1 has begun.

In addition, the Internet information, which the terminal 1 user requests to be sent to the terminal 1 is also transmitted in parallel with the other operations. The message manager 11 determines whether the display completion timer has been timed out (S208). In the following steps S209 and S210, the display completion timer is reset or set to measure a predetermined time when the information provider 4 receives an event indicating the completion of displaying a

message which is transmitted from the terminal 1 as described above. If the display completion timer is timed out without receiving the display completion event from the terminal 1 within the time of the display completion timer (YES at S208), the same message might be still displayed on the display for more than the predetermined time or communication errors may have occurred (S211). Therefore the information provider 4 disconnects the communication with the terminal 1.

When the display completion event is received from the terminal 1 before the display completion timer times out, the message manager 11 determines whether the level-1 event has been received from the terminal 1 (S212). If the level-1 event has been received, the predetermined time has elapsed after displaying the notice and the status of the message in the display 8 is abnormal in the terminal 1. Then, the message manager 11 transmits to the terminal 1, via the display delayer 28 of the Internet information transmission controller 25, the data (IP packet) of the Internet image in an error which occurs at every other transmission (S213).

Therefore, because the receipt of normal Internet images is delayed, even if the user attempts to update the Internet images being displayed, the terminal 1 cannot obtain the Internet images quickly due to the delay in updating. Therefore, a statement indicating that the display of the message is to be returned from the abnormal status to the normal status is applied to the terminal 1 user more effectively than would be achieved by merely displaying the notice.

If a level-1 event is not received at S212 or after the process at S213, the message manager 11 determines whether a

level-2 event transmitted from the terminal 1 is received (S214). If a level-2 event is received, the message manager 11 transmits all the data (IP packet) of the Internet image to the terminal 1 in errors, via the display suspender 29 of the Internet information transmission controller 25, since the display has continued for more than the predetermined time and the display of the message in the display 8 remains abnormal even after delaying the Internet images as described above (S215).

Because the terminal 1 cannot receive the Internet images normally, the user cannot update the Internet images. Therefore, the terminal user is more effectively made aware that he should return the message to normal status .

If a level-2 event is not received at S214, or after the process at S215, the message manager 11 determines whether a level-3 event transmitted from the terminal 1 has been received (S216). If a level-3 event is received, the predetermined time has passed and the message in the display 8 is abnormal even after updating of the Internet images is terminated in the terminal 1. Therefore the message manager 11 disconnects the communication with the terminal 1 by the communication disconnector 30 of the Internet information transmission controller 25 (S217). As a result the terminal 1 user cannot receive Internet images at all.

If a level-3 event is not received at S216, the message manager 11 determines whether a recovery event has been received from the terminal 1 (S218). Here, the terminal 1 transmits the recovery event when the message status in the display 8 returns to normal within the predetermined time after delaying or terminating the updating of the Internet images. The message manager 11 cancels the delay made by the

display delayer 28 or suspension of updating the Internet images made by the display suspender 29 and the data transmission of the Internet images to the terminal 1 returns to normal (S219). As a result, the terminal 1 can normally receive the requested images of the Internet.

In the present embodiment, the status of the message in the display 8 is controlled to be normal. If the message status is abnormal, a notice appears, the Internet information is delayed, the Internet information is suspended, and the communication is disconnected, step by step, depending on how long the abnormal status has persisted. Even if the Internet information is delayed or terminated, the user can receive the requested Internet images normally when the status of the message is returned to normal. The user is accurately and precisely made aware that the message should be changed to normal status. This ensures that the message in the terminal 1 appears in the front of the display and that the whole message appears within the display 8. When the messages are displayed normally in the display 8, the users accurately and effectively take in the messages.

After the above processes, the message manager 11 determines whether it has received new transmission requests from the terminal 1 (S220). If new transmission requests have been received, the transmission request counter is increased (S221). Then, the message manager 11 determines whether there are transmission requests for an emergency message, such as earthquake information (S222). This transmission request is different from the one transmitted from the terminal 1. If there is a transmission request for an emergency message, the emergency message is inserted to the top of the queue in the information provider 4 (S223).

The message manager 11 also determines whether it is the appropriate time to display any of the time-designated messages stored in the message database 12 (S224). If it is the time for transmission, the appropriate time designated message is inserted to the top of the queue before all the messages except the emergency messages and other time designated messages (S225). Next, the message manager 11 determines whether the number of messages in the queue of the information provider 4 is less than the predetermined limit (S226). The process goes to S246 if the number of messages is not less than the limit. On the other hand, if the number of the messages in the queue is less than the limit, and if there is a room in the queue, the message manager 11 proceeds as follows with the transmission message selector 26.

The messages in the message database 12 are inserted to the queue of the information provider 4 (Fig. 7). The transmission message selector 26 determines whether the message transmission condition of the next message includes the terminal 1 user information in the user database 13 (see Fig. 8) (S227). If it includes this information, the process goes to S230. If the display condition does not include the terminal 1 user condition, the information provider 4 determines whether all the messages in the message database 12 have been scanned (searched) (S228).

If all messages have not been scanned, the search pointer of the message in the message database 12 moves by one and the message condition and the user information are compared again by returning to S227 (S229). If the all messages in the message database 12 have been scanned at S228, the process goes to the S246. As a result, the messages whose transmission condition corresponds to the user

information are searched from the message database 12. The time designated messages inserted to the queue at S225 and the messages, whose designated time has not yet been reached, are excluded from the search.

Fig. 22 shows a method for comparing the display condition of the message and the user information at S227. First, whether the message designates an age range is determined (S301). If an age range is designated, the age of the user is calculated based on the date of birth stored in the user database 13 (S302). Then, the calculated age is compared with the age range designated by message (S303). If the calculated age is not within the age range of the message, the message is determined to be no good (NG).

Next, the message selector 26 determines whether the message designates the sex of the user (S304). If the sex is designated, it is determined whether the sex of the user matches the designated sex (S305). If they do not match, the message is determined to be no good (NG). Similarly, if the display condition of the message designates marital status, occupation, or the address of the user, the process determines whether the display condition of the target message corresponds with the characteristics of the user (S306 to S311). If any one of the items which the display condition designates does not correspond, the display condition of the target message is determined to be not good (NG). If the contents of all of the items of the message transmission condition are appropriate for the user, or if none of the items is designated, the message is selected for the user (OK).

After a message whose display condition matches the user has been found (YES at S227 in Fig. 20), the message selector

26 determines from the data in the message database 12 (see Fig. 7) whether the message has a total display limit (S230). If there is no designation of the total display limit, the process goes to S236, which is described later.

If there is a designation of the total display limit, searches are made in the total display limit file shown in Fig. 9 of the transmission database 27, using the message ID of this message as the key (S231). Then, the record corresponding to the message is searched in the total limit management file (S232). If no record found, a record for the message is created in the total limit management file (S233). At this time, the display counter of the message is set to 0 (zero).

If a record is found at S232, or if a new record is created at S233, the message selector 26 determines whether the display counter of the record is below the total limit (S234). If the display counter is below the total limit, the process increments the display counter and goes on to the S236 (S235). If the display counter has reached the total limit, a new message is searched through S228 and S229.

In S236, the message selector 26 determines from the data in message database 12 (see Fig. 7) whether the current message has a display limit per user (per terminal 1). If there is no designation of a display limit, the process goes on to S244.

If an individual limit per user (per terminal 1) is designated, the process searches the individual limit management file (see Fig. 10) corresponding to the current message in the transmission database 27, using the user ID of the user as the key (S237). Then, the process determines

whether a record corresponding to the user is found in the limit management file for the current message (S238). If no record found, a record of the user is created in the total limit management file (S239). At this time, the display counter of the user is set to 0.

If a record is found at S238, or if a new record is created at S239, the message selector 26 determines whether the display count of the record of the user is below the limit of the current message (S240). If the display counter is below the limit of the current message, the process goes to S244 after increasing the display counter (S241). If the display counter has reached the limit of the current message, the message selector 26 again determines whether the current message has a total display limit (S242). If no total display limit is designated, a new message is searched through S228 to S229. The display counter of the current message in the total limit management file was increased at S235. If a total display limit is designated, the display counter of the current message is decreased to the original value (S243). A new message is searched through S228 to S229.

If the message selected by the above process is determined to be appropriate for the user and the conditions for the total display limit and the display limit per user are satisfied, then the message is added after the other messages at the end of the queue of the information provider 4 by the message selector 26 (S244). Then, the process moves to S246 after moving the search pointer in the message database 12 to the next message (S245).

In S246, the message manager 11 determines whether there is an emergency message at the top of the queue of the

information provider 4. If there is no emergency message, the process determines whether the count value of the transmission request counter indicating the number of the transmission request from the terminal 1 is more than 1 (S247). If the count value of the transmission request counter is more than 1, and if a transmission request has been received from the terminal 1, then it is determined whether there are messages in the queue of the information provider 4 (S248) . If there is no message in the queue, a predefined default message is set to the top of the queue (S249). If there is a message in the queue at S248, or if the default message is set at S249, the message at the top of the queue is transmitted to the terminal 1 (S251) after decreasing the transmission request counter (S250). The processes then repeat from S208.

If there is an emergency message at S244, the emergency message is immediately transmitted to the terminal 1 at S251 regardless of any transmission request from the terminal 1. If the transmission request counter is 0 (zero) and no transmission request is received from the terminal 1 at S245, the process returns to S208 without transmitting any message to the terminal 1.

As a modification of the embodiment, the internet image actively selected by the user and the passive message may be displayed in different windows, and when the message window is closed, the communication line between the terminal 1 and the information provider 4 may be automatically disconnected. Alternatively, operation of the system may be arranged so that an event is periodically supplied from the message display controller 18 to the information provider 4, which counts the interval between events. In this case, when no event is supplied from the message display controller 18 for a

predetermined period of time, the information provider 4 thereby determines that the message display controller 18 has been forcibly closed by the user, and disconnects the communication line.

The respective "display areas" may be realized by creating different windows, or by dividing one window into a plurality of areas. In the latter case, scrolling in the message area is disabled, while scrolling of the internet information displayed in the different area is allowed, thereby reliably providing the messages to the user.

All or a part of the operations of the information provider 4 and the terminal 1 may be stored as a program in a recording medium. The term "recording medium" in the claims encompasses magnetic discs, such as floppy diskettes, optical discs, such as CD-ROM or DVD, magneto-optic disks, such as MO and MD, and semiconductor media, such as memory cards, miniature cards and IC cards. Furthermore, such a program can be provided through the communications network by using the hard disk drive or semiconductor memory of the information provider or other host computers connected to the communications network as the "recording medium."

The program stored in the recording medium may be read out into the RAM 44 directly and executed by the CPU 40. Alternatively, the program may be installed into the hard disk drive 50 first, and then read out to the RAM 44 for execution. The program may be supplied in a single recording medium, or it may be divided and stored in multiple recording media. The recording media storing the divided program may be sold individually or as a set. The program may be encoded for storage in the recording medium. Any such recording media storing the program in any forms are within the scope of the

present invention.

Although the invention has been described in conjunction with the preferred embodiments, the invention is not limited to the embodiments, and those skilled in the art can practice the present invention with various modifications. For example, as an alternative, a portion of the functions of the information provider 4 may be implemented and conducted by the terminal 1. Conversely, a portion of the functions of the terminal 1 may be executed by the information provider 4, as another modification. The functions of the terminal 1 may be limited to merely transferring the user's input to the information provider 4 and displaying the image data received from the information provider 4, so that the rest of the functions of the terminal 1 are implemented by the information provider 4.

A data communications network, such as a LAN, a private line, or the Internet, may be provided between the terminal 1 and the information provider 4. Furthermore, a plurality of host computers may be connected through the data communications network so that each host computer shares all or a portion of the functions of the above described information provider 4, and a portion of the functions of the above described terminal 1. More particularly, providers, to which the user directly connects the terminal using a public line, such as a PSTN or ISDN, and other host computers connected through the Internet or other networks may share and execute all or a portion of the functions of the above described information provider 4 and a portion of the functions of the terminal 1. In this case, the term "information provider" in the claims corresponds to any or all host computers connected to the network.

These modifications in the design are obvious to those persons having an ordinary skill in the art, and are clearly within the scope of the invention defined by the appended claims. The applicant intends to file a continuation application based on the present international patent application in the United States, which is one of the designated countries, instead of proceeding to the national phase procedure.

ADVANTAGE OF THE INVENTION

According to the present invention, passive information selected by the communications network which includes the information provider 4 is forcibly displayed on the display of the terminal 1, regardless of the content or type of information which is actively selected by the user of the terminal 1. For example, advertisements of goods or services can be supplied to the user as passive information. Such advertisements are reliably provided to users, while the users are using the communications network.

Via the processes of the information provider 4, each message in the message database 12 is provided to the appropriate users. Each message is displayed onto the display 8 of the terminal 1 according to the display condition including the total display limit, the individual display limit per user, and the display time. Therefore, messages are not provided to any given user more times than is necessary. Also, messages are not provided which would be irrelevant to the user. Each message is provided an appropriate number of times, at the appropriate times, to the appropriate users.

In the present embodiment, the time-designated messages

were provided from the information provider 4 to the terminal 1 without determining the user information. However, the time-designated messages can be provided to the users whose characteristics correspond to the message transmission conditions. The present embodiment provided information from the Internet 9. However, the present invention can be applied to a system, which provides information from general computer networks.

* C L M S *

What is claimed is:

1. An information display system comprising:

an information provider;

a communication line connected to the information provider;

a display; and

a display controller which receives an active image and a passive image from the information provider through the communication line and displays the active image and the passive image in separate areas of the display.

2. An information display system as claimed in Claim 1, wherein:

the display controller displays the passive image in the front of the display.

3. An information display system as claimed in Claim 2, wherein:

the display controller displays the whole passive image within the display.

4. An information display system as claimed in Claim 3, further comprising:

a detector which detects whether or not the passive image is in normal status, normal status being a condition where the passive image is displayed in the front of the display and the whole passive image is displayed within the display; and

a notifier which provides a notice, when the detector detects that the passive image is not in normal status.

5. An information display system as claimed in Claim 4, wherein:

This Sheet Has Been Replaced

THIS S[illegible]N

* C L M S *

the notifier displays the notice on the display.

6. An information display system as claimed in Claim 4 or 5, wherein:

the active image can be updated; and

the detector detects the status of the passive image after a predetermined period of time from the provision of the notice;

the information display system further comprising:

a display delayer which delays updating the active image when the detector detects the status as being not normal.

7. An information display system as claimed in Claim 6, further comprising:

a display suspender which suspends updating the active image when the detector detects the status as being not normal after a predetermined period of time from the time when the display delayer delays updating the active image.

8. An information display system as claimed in Claim 7, further comprising:

a communication disconnector which disconnects the communication between the information provider and the terminal when the detector detects the status as being not normal after a predetermined period of time from the time when the suspender suspends updating the active image.

9. An information display system as claimed in Claim 3, wherein the active image can be updated, further comprising:

a detector which detects whether the passive image is in normal status, normal status being a condition where the passive image is displayed in the front of the display and the whole image is displayed within the display; and

a display delayer which delays updating the active image

This Sheet Has Been Replaced

THIS ... EN



when the detector detects that the passive image is not in normal status.

10. An information display system as claimed in Claim 6 or 9, wherein the display delayer delays updating the active image by delaying transmission of the active image from the display information provider to the terminal.

11. An information display system as claimed in one of Claims 6, 9, and 10, further comprising:

means for canceling the delay of the display delayer when the detector detects normal status within a predetermined period of time after the display delayer delays the update.

12. An information display system as claimed in Claim 3, wherein the active image can be updated, further comprising:

a detector which detects whether the passive image is in normal status, normal status being a condition where the image is displayed in the front of the display and the whole image is displayed within the display; and

a display suspender which suspends updating the active image when the detector detects that the passive image is not in normal status.

13. An information display system as claimed in Claim 7 or 12, wherein:

the display suspender suspends updating the active image by terminating the normal transmission of active images from the display information provider to the terminal.

14. An information display system as claimed in one of Claims 7, 12, and 13, further comprising:

means for canceling the suspension of the update by the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

* C L M S *

display suspender when the detector detects normal status within a predetermined period of time after the display suspender suspends the update.

15. An information display system as claimed in Claim 3, further comprising:

a detector which detects whether the passive image is in normal status, normal status being a condition where the image is displayed in the front of the display and the whole passive image is displayed within the display; and

a communication disconnector which disconnects the communication between the information provider and the terminal when the detector detects the image as being not in normal status.

16. An information provider that transmits a plurality of images to a terminal having a display, using a communication line to which the terminal can be connected, the information provider comprising:

means for receiving a request for an active image actively designated by the user of the terminal from the terminal;

means for selecting the active image designated by the user from among the plurality of types of images, based on the user's request;

means for selecting a passive image to be displayed on the terminal from among the plurality of types of images, regardless of active designation by the user; and

means for transmitting both the active image and the passive image to the terminal so as to have these images be displayed on the terminal.

17. An information provider as claimed in Claim 16, further comprising display control means for having the active image

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

HY9605PCT

* C L M S *

and the passive image be displayed in different display areas provided on the display.

18. An information provider as claimed in Claim 16, further comprising:

means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

means for warning the terminal when the detecting means detects that the display state is not the normal display state.

19. An information provider as claimed in Claim 18, wherein the warning means includes means for having a warning notice be displayed on the display.

20. An information provider as claimed in Claim 16, comprising:

means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

means for delaying updating the active image when it is detected that the display state is not normal .

21. An information provider as claimed in Claim 20, wherein the delay means delays updating the active image by delaying normal transmission of active images to the terminal from the information provider.

22. An information provider as claimed in Claim 20, comprising

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

HY9605PCT

* C L M S *

means for canceling the delay in updating by the delay means when the detecting means detects that the display state is normal.

23. An information provider as claimed in Claim 16, comprising:

means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

means for stopping the updating of the active image when the detecting means detects that the display state is not normal.

24. An information provider as claimed in Claim 23, wherein the stop means stops updating the active image by stopping normal transmission of active images to the terminal from the information provider.

25. An information provider as claimed in Claim 23, comprising means for canceling the stopping of the updating by the stop means when the detecting means detects that the display state is not normal .

26. An information provider as claimed in Claim 16, comprising:

means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

means for disconnecting the communication between the terminal and the information provider when the detecting means

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

detects that the display state is not normal.

27. An information provider as claimed any of Claims 18 through 26, wherein the terminal has a display memory storing and holding the contents of the information displayed on the display; and

the detecting means detects whether the passive image is displayed in the normal display state by detecting whether the contents of the display memory are identical to the passive image transmitted from the information provider displayed in the display area for passive images.

28. An information provider as claimed in Claim 16, comprising means for having the passive image be displayed on the front-most surface of the display.

29. An information provider as claimed in Claim 16, comprising:

means for detecting whether the entire passive image is displayed on the front-most surface of the display; and

means for warning the terminal when the passive image is not displayed on the front-most surface of the display.

30. An information provider as claimed in Claim 29, wherein the warning means includes means for having a warning notice be displayed on the display.

31. An information provider as claimed in Claim 16, comprising delay means for delaying the display of active images when it is detected that the passive image is not displayed on the front-most surface of the display.

32. An information provider as claimed in Claim 16, comprising means for stopping the updating of the active image when it is

This Sheet Has Been Replaced
THIS SHEET HAS BEEN REPLACED

* C L M S *

detected that the passive image is not displayed on the front-most surface of the display.

33. An information provider as claimed in Claim 16, comprising means for disconnecting the communication between the information provider and the terminal when it is detected that the passive image is not displayed on the front-most surface of the display.

34. An information provider as claimed in Claim 16, comprising means for having the entire passive image be displayed in the allowed area of the display.

35. An information provider as claimed in Claim 16, comprising:

means for detecting whether or not the entire passive image is displayed in the allowed area of the display; and

means for warning the terminal when the passive image is not displayed in the allowed area of the display.

36. An information provider as claimed in Claim 16, wherein the warning means includes means for having a warning notice be displayed on the display.

37. An information provider as claimed in Claim 16, comprising means for delaying the display of active images when it is detected that the entire passive image is not displayed on the allowed area of the display.

38. An information provider as claimed in Claim 16, comprising means for stopping the updating of the active image when it is detected that the entire passive image is not displayed in the allowed area of the display.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

39. An information provider as claimed in Claim 16, comprising means for disconnecting the communication between the information provider and the terminal when it is detected that the entire passive image is not displayed in the allowed area of the display.

40. An information provider as claimed in Claim 40, comprising:

a message database storing a plurality of passive images while associating each image with a display condition; and

means for selecting passive images according to the associated display condition.

41. An information provider as claimed in Claim 16, further comprising a user database storing a type of the user of the terminal, wherein:

the display condition includes the type of the user, based on which the associated passive image is displayed; and

the selecting means comprises:

means for reading the type information of each user from the user database; and

means for selecting a passive image satisfying the display condition from the database, based on the type information read out from the user database.

42. An information provider as claimed in Claim 41, wherein the type of the user includes the user's age, sex, marital status, occupation, and address.

43. An information provider as claimed in Claim 40, wherein the display condition includes the upper limit, for each user, of the number of times each passive image is to be displayed on the terminal of the user, the information provider further comprising;

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

means for counting the number of times the passive image is transmitted to the terminal for each user; and

means for preventing the passive image from being transmitted to the terminal when the number of times the passive image is transmitted reaches the upper limit .

44. An information provider as claimed in Claim 43, wherein the upper limit of the number of times the image is to be displayed is a number of times per predetermined time period.

45. An information provider as claimed in Claim 40, wherein the display condition includes the upper limit, for each passive image, of the number of times the passive image is to be displayed on terminals, the information provider further comprising:

means for counting, for each passive image, the number of times the passive image is transmitted to terminals; and

means for preventing the passive image from being transmitted to the terminal when the number of times the image is transmitted reaches the upper limit.

46. An information provider as claimed in Claim 45, wherein the upper limit of the number of times information is to be displayed is a number of times per predetermined time period.

47. An information provider as claimed in Claim 40, wherein the display condition includes a requested display time for each passive image, the information provider further comprising means for transmitting the passive image to the terminal when the current time reaches the requested display time.

48. An information provider as claimed in Claim 16, wherein the information provider is connected to the Internet, and the

This Sheet Has Been Replaced

THIS SHEET HAS B... REPLACED



terminal has means for requesting information on the Internet as active images, the information provider further comprising means for selecting and transmitting information from the Internet to the terminal in response to a request from the terminal.

49. An information provider as claimed in Claim 48, wherein the active image is successively transmitted from the information provider and periodically updated on the display.

50. An information provider as claimed in Claim 49, further comprising means for transmitting product or service advertisement information to the terminal as passive images.

51. A recording medium storing a program for operating a terminal having a display and a means for connecting to an information provider that transmits a plurality of images through a communication line, the program comprising:

means for causing the terminal to connect to the information provider through the communication line;

means for causing the terminal to transmit a request for an active image actively designated by the user to the information provider;

means for causing the terminal to receive the active image selected, based on the request, from among the plurality of images from the information provider;

means for causing the terminal to receive a passive image to be displayed on the terminal regardless of the presence of active designation by the user of the terminal; and

means for causing the terminal to receive both the active and the passive image from the information provider and display them on the display.

52. A recording medium as claimed in Claim 51, wherein the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED HY9605PCT

program further comprises display control means for having the passive image and active image be displayed in different display areas provided on the display.

53. A recording medium as claimed in Claim 51, wherein the program further comprises:

detecting means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

warning means for causing the terminal to warn the user when the detecting means detects that the display state is not normal.

54. A recording medium as claimed in Claim 53, wherein the warning means includes means for causing the terminal to display a warning notice on the display.

55. A recording medium as claimed in Claim 51, wherein the program comprises:

detecting means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

delay means for delaying the updating of the active image when the detecting means detects that the display state is not normal.

56. A recording medium as claimed in Claim 55, wherein the delay means delays updating the active image by having the normal transmission of active images from the information provider to the terminal be delayed.

This Sheet Has Been Replaced
THIS SHEET HAS BEEN REPLACED

* C L M S *

57. A recording medium as claimed in Claim 55, wherein the program comprises means for having the delay means cancel the delay in updating when the detecting means detects that the display state is normal.

58. A recording medium as claimed in Claim 51, wherein the program comprises:

detecting means for detecting whether or not the display state of the passive image is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display and within the allowed area of the display; and

stop means for stopping the updating of the passive image when the detecting means detects that the display state is not normal.

59. A recording medium as claimed in Claim 58, wherein the stop means stops the updating of the active image by stopping the normal transmission of active images from the information provider to the terminal.

60. A recording medium as claimed in Claim 58, wherein the program further comprises means for having the stop means cancel the stopping of the updating when the detecting means detects that the display state is normal.

61. A recording medium as claimed in Claim 51, wherein the program comprises:

detecting means for detecting whether or not the display state is normal, a normal display state being a display state in which the entire passive image is displayed on the front-most surface of the display area and within the allowed area of the display; and

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

means for having the communication between the terminal and the information provider be disconnected when the detecting means detects that the display state is not normal .

62. A recording medium as claimed in any of Claims 53 through 61, wherein the terminal has a display memory storing and holding the contents of the information displayed on the display, and the detecting means detects whether or not the passive image is displayed in the normal display state based on whether or not there is a coincidence between the contents of the display memory and the passive image transmitted from the information provider in the passive image display area.

63. A terminal having a display and a means for connecting the terminal through a communication line to an information provider which can transmit a plurality of images, the terminal comprising:

means for transmitting a request for an active image actively designated by the user of the terminal to the information provider;

means for receiving the active image selected from among the plurality of images, based on the request, from the information provider;

means for receiving a passive image to be displayed, regardless of the presence of active designation by the user, from the information provider; and

means for displaying both the active and the passive image.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

ABSTRACT OF THE INVENTION

An information providing system, which transmits a passive image such as an advertisement while providing a requested image. The passive image and the requested image, for example, information from the Internet 9, are transmitted from the information provider 4 to the terminal 1 and displayed separately on the display 8. The whole passive image is displayed in the front of the display 8.

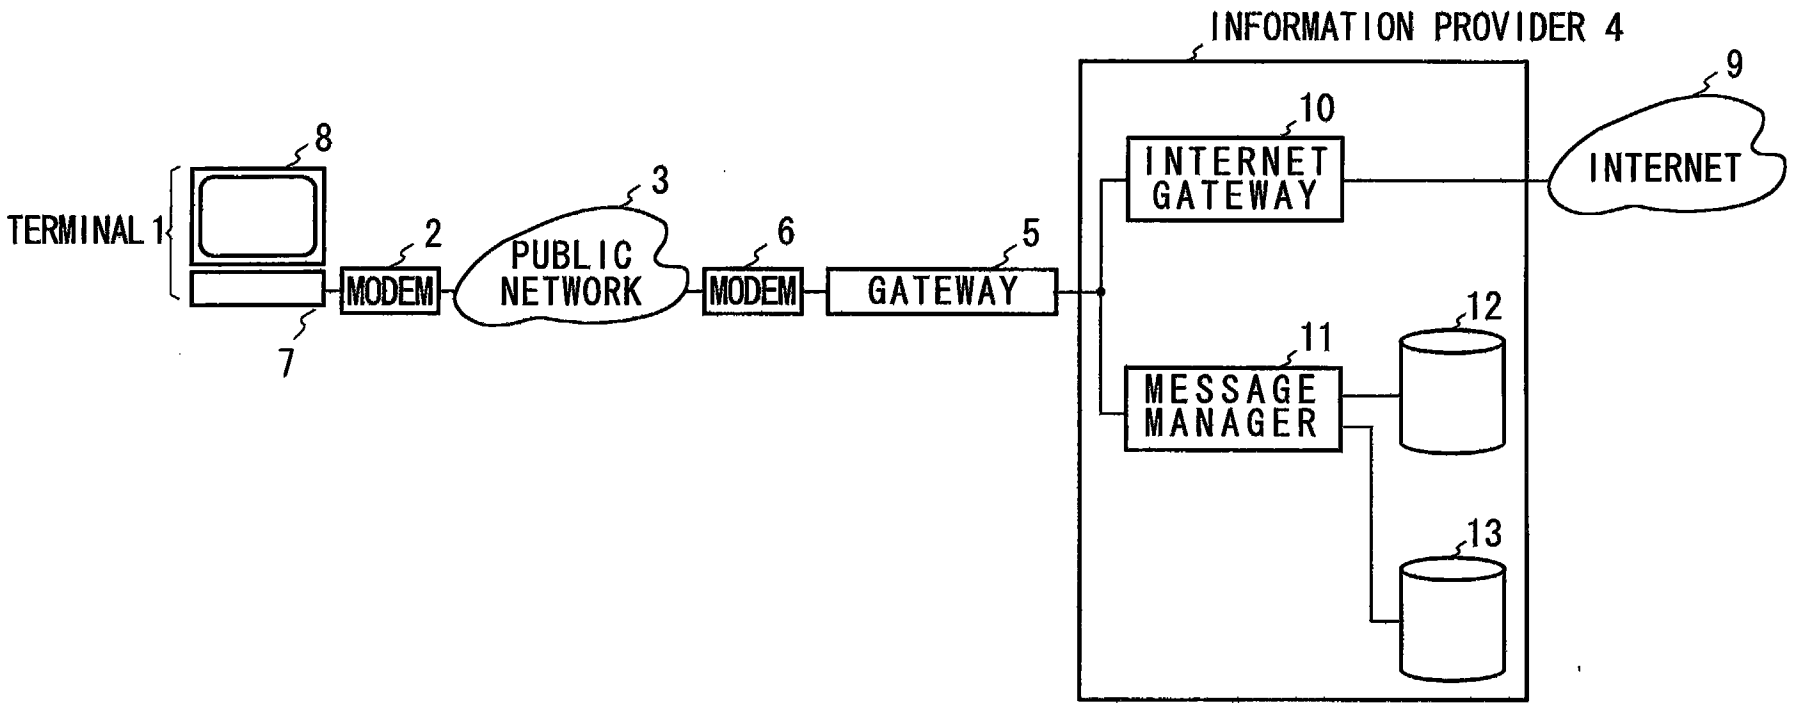

INFORMATION PROVIDER 4
9
10
INTERNET GATEWAY
INTERNET
8
TERMINAL 1
2
MODEM
3
PUBLIC NETWORK
6
MODEM
5
GATEWAY
12
11
MESSAGE MANAGER
13
7

FIG. 1

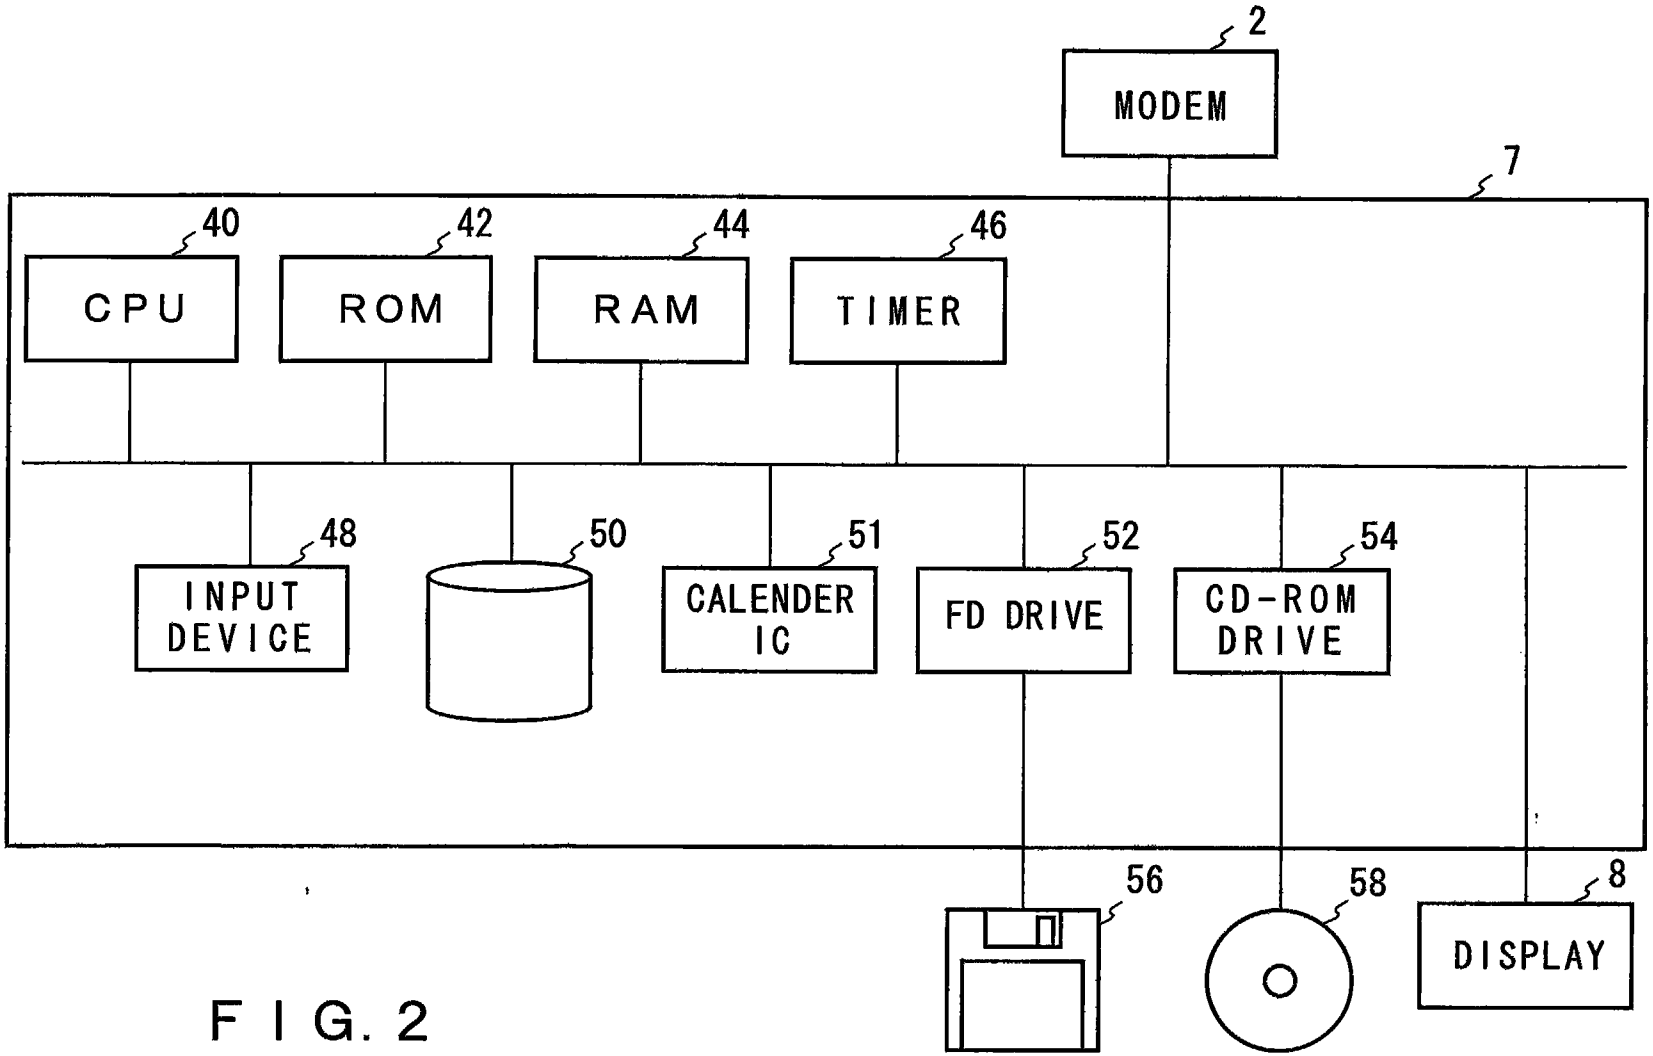

2
MODEM
7
40
CPU
42
ROM
44
RAM
46
TIMER
48
INPUT DEVICE
50
51
CALENDER IC
52
FD DRIVE
54
CD-ROM DRIVE
56
58
8
DISPLAY

FIG. 2

MESSAGE DATA BASE 12

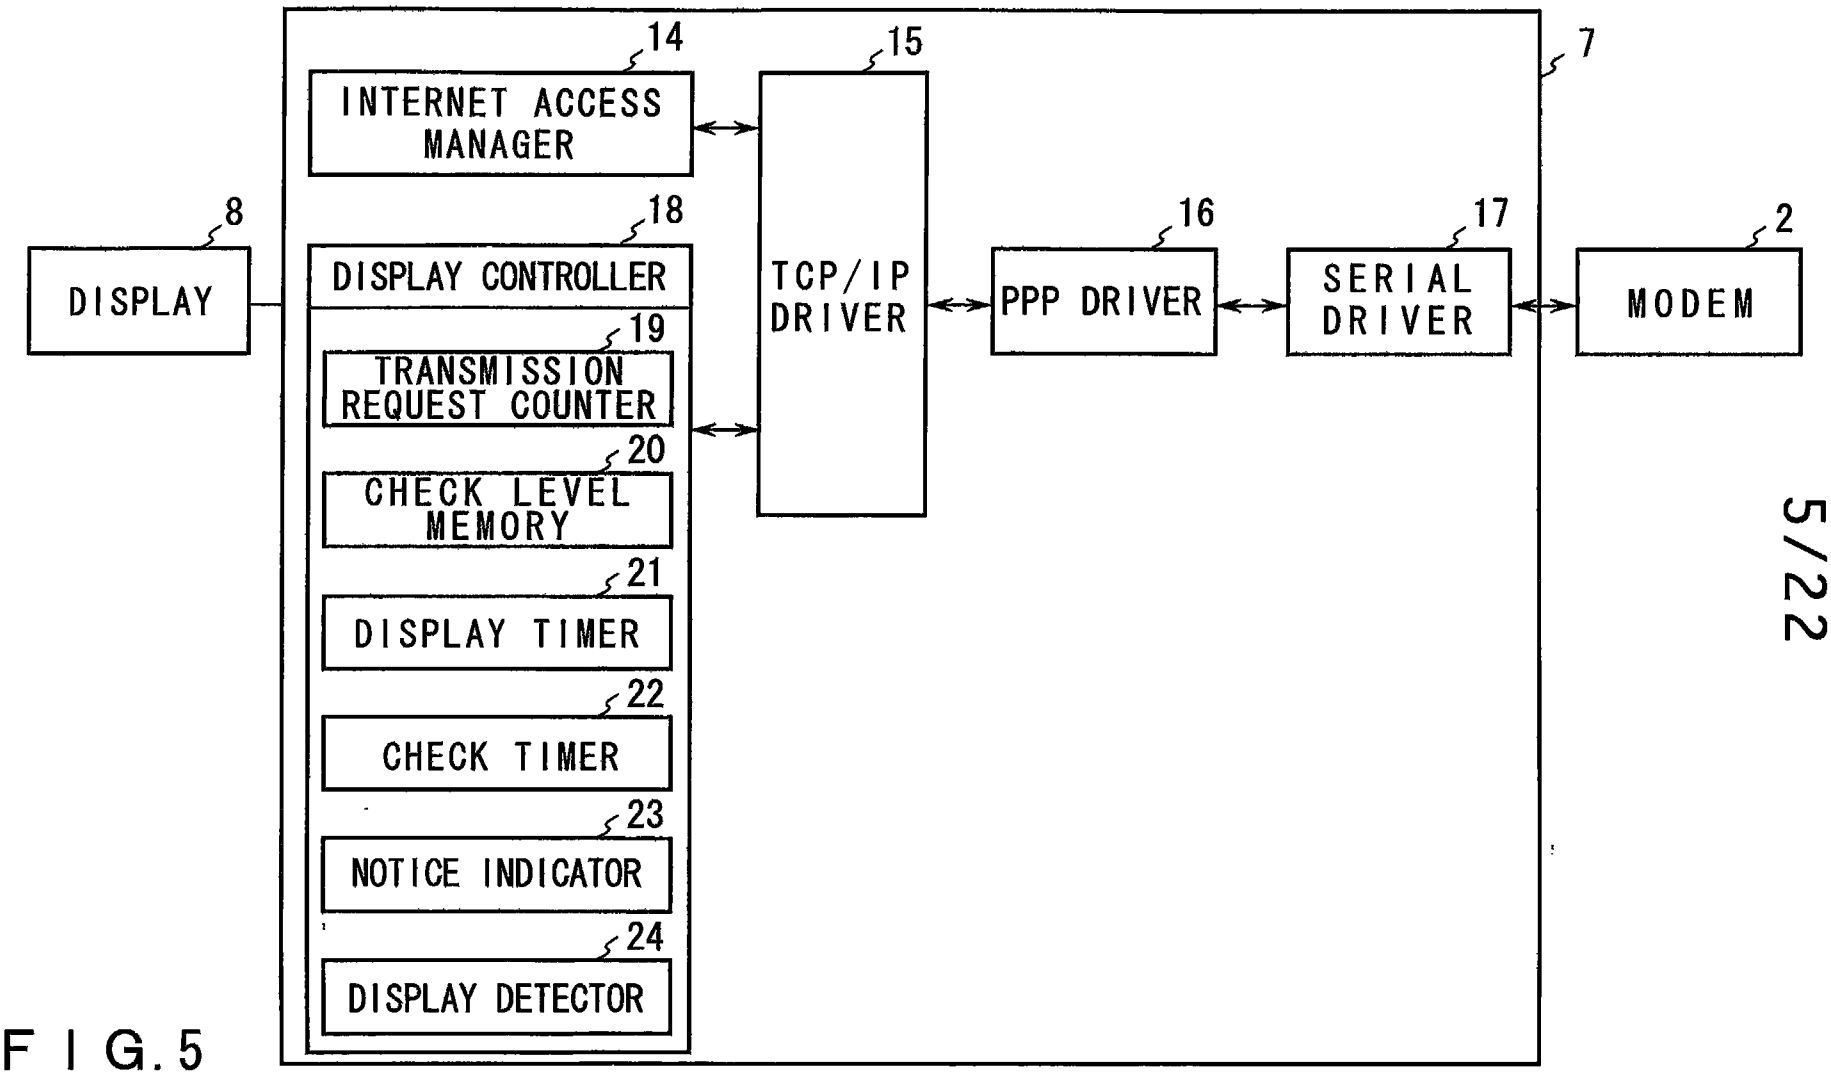
MESSAGE ID	INDIVIDUAL LIMIT TYPE	INDIVIDUAL LIMIT	TOTAL LIMIT TYPE	TOTAL LIMIT	DISPLAYED TIME	AGE	SEX	MARRIED	OCCUPATION	ADDRESS	IMAGE DATA
---	DAY	3	DAY	1000	---	18-22	MALE	NO	CORPORATION	TOKYO	
---	TOTAL	10	MONTH	10000	---	--	FEMALE	YES	STUDENT	KANAGAWA	
---	---	---	---	---	1996.1.1 /12:00	--	--	--	---	---	
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮

FIG.3

USER DATA BASE 13

USER ID	PASSWORD	DATE OF BIRTH	SEX	MARRIED	OCCUPATION	ADDRESS
------	------	1968.6.2	MALE	NO	CORPORATION	SHINJUKU-KU TOKYO
⋮	⋮	⋮	⋮	⋮	⋮	⋮

FIG.4


14
INTERNET ACCESS MANAGER
15
7
8
DISPLAY
18
DISPLAY CONTROLLER
19
TRANSMISSION REQUEST COUNTER
20
CHECK LEVEL MEMORY
21
DISPLAY TIMER
22
CHECK TIMER
23
NOTICE INDICATOR
24
DISPLAY DETECTOR
TCP/IP DRIVER
16
PPP DRIVER
17
SERIAL DRIVER
2
MODEM

F I G. 5

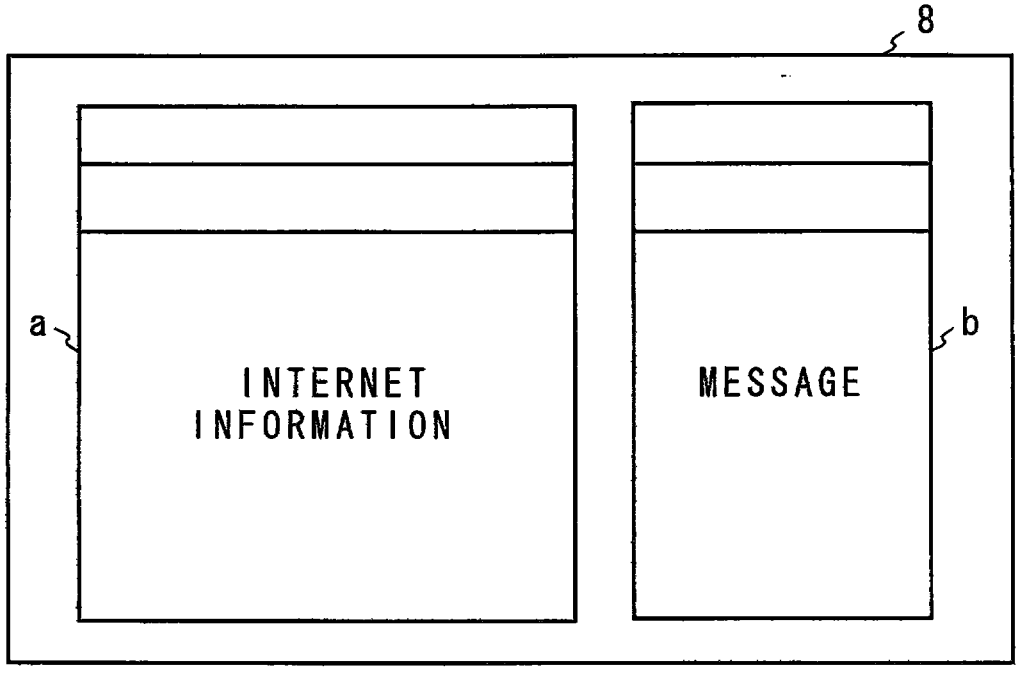


FIG.6

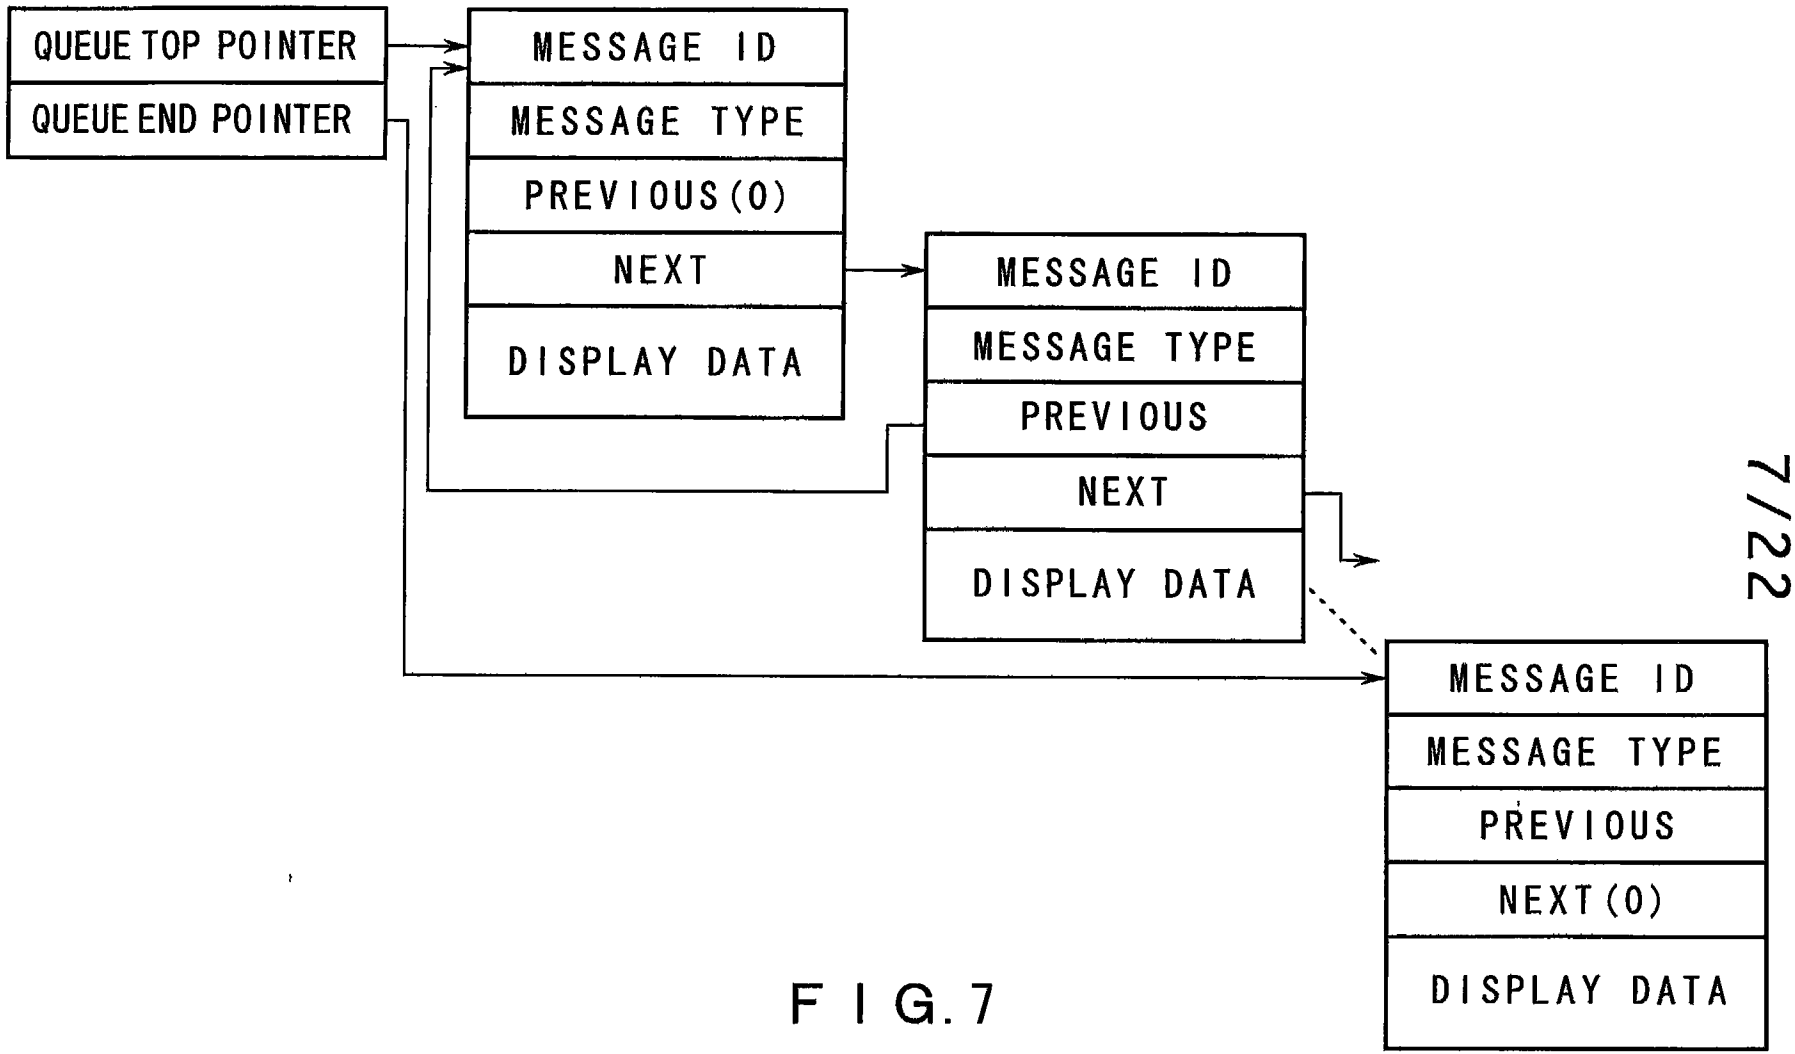
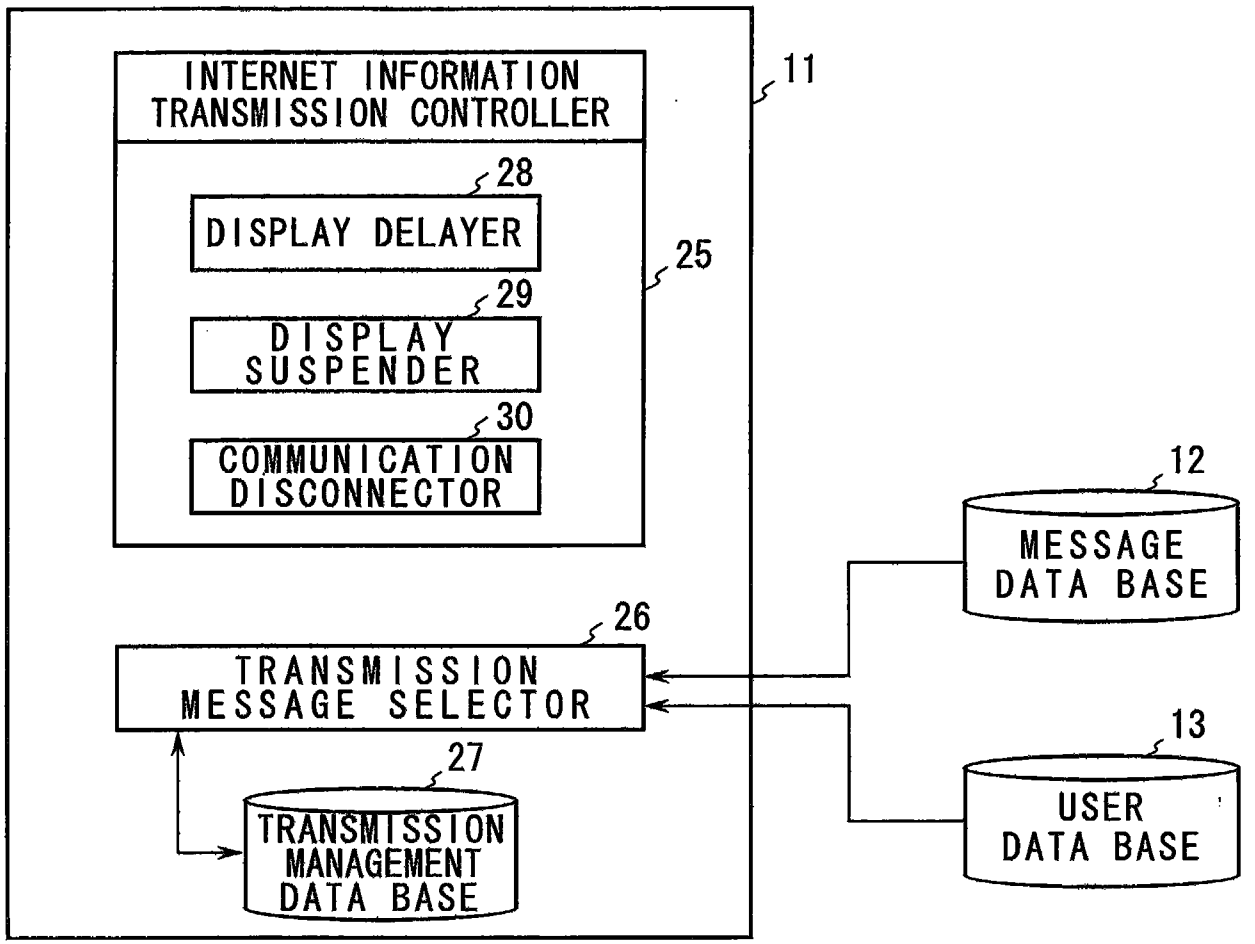

QUEUE TOP POINTER
QUEUE END POINTER
MESSAGE ID
MESSAGE TYPE
PREVIOUS(0)
NEXT
DISPLAY DATA
MESSAGE ID
MESSAGE TYPE
PREVIOUS
NEXT
DISPLAY DATA
MESSAGE ID
MESSAGE TYPE
PREVIOUS
NEXT(0)
DISPLAY DATA

FIG.7


INTERNET INFORMATION TRANSMISSION CONTROLLER
11
28
DISPLAY DELAYER
25
29
DISPLAY SUSPENDER
30
COMMUNICATION DISCONNECTOR
12
MESSAGE DATA BASE
26
TRANSMISSION MESSAGE SELECTOR
13
USER DATA BASE
27
TRANSMISSION MANAGEMENT DATA BASE

F I G. 8

TOTAL LIMIT MANAGEMENT FILE

MESSAGE ID	TOTAL LIMIT TYPE	TIME STAMP	DISPLAY COUNTER
----------	DAY	1996.1.1	10
----------	MONTH	1996.1	30
----------	TOTAL	0	50
	----------	----------	----------

FIG. 9

INDIVIDUAL LIMIT MANAGEMENT FILE

USER ID	INDIVIDUAL LIMIT TYPE	TIME STAMP	DISPLAY COUNTER
-------	DAY	1996.1	3
-------	MONTH	1996.1.1	1
-------	TOTAL	0	10
⋮	⋮	⋮	⋮

FIG.10

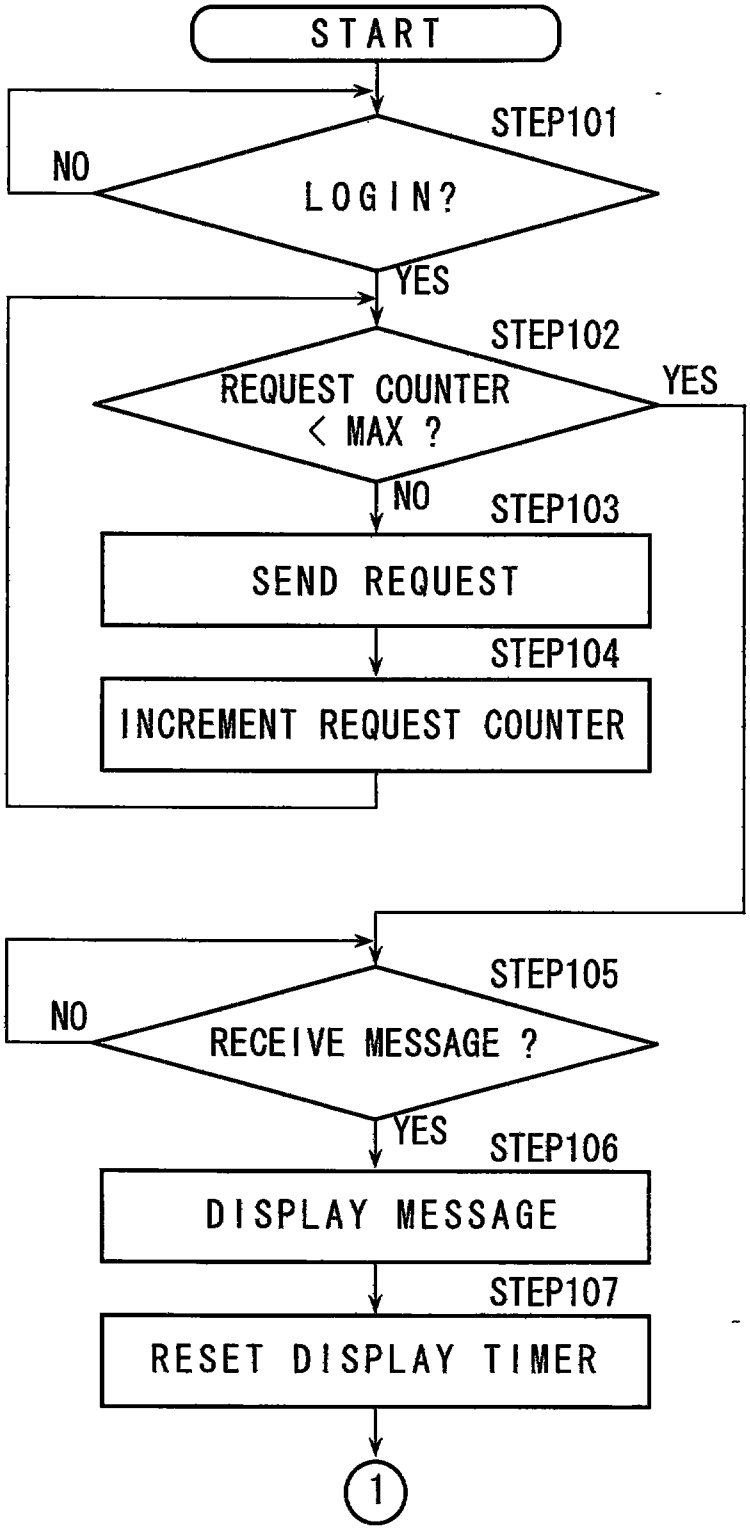

START
STEP101
NO
LOGIN?
YES
STEP102
REQUEST COUNTER
< MAX ?
YES
NO
STEP103
SEND REQUEST
STEP104
INCREMENT REQUEST COUNTER
STEP105
NO
RECEIVE MESSAGE ?
YES
STEP106
DISPLAY MESSAGE
STEP107
RESET DISPLAY TIMER
1

FIG.11

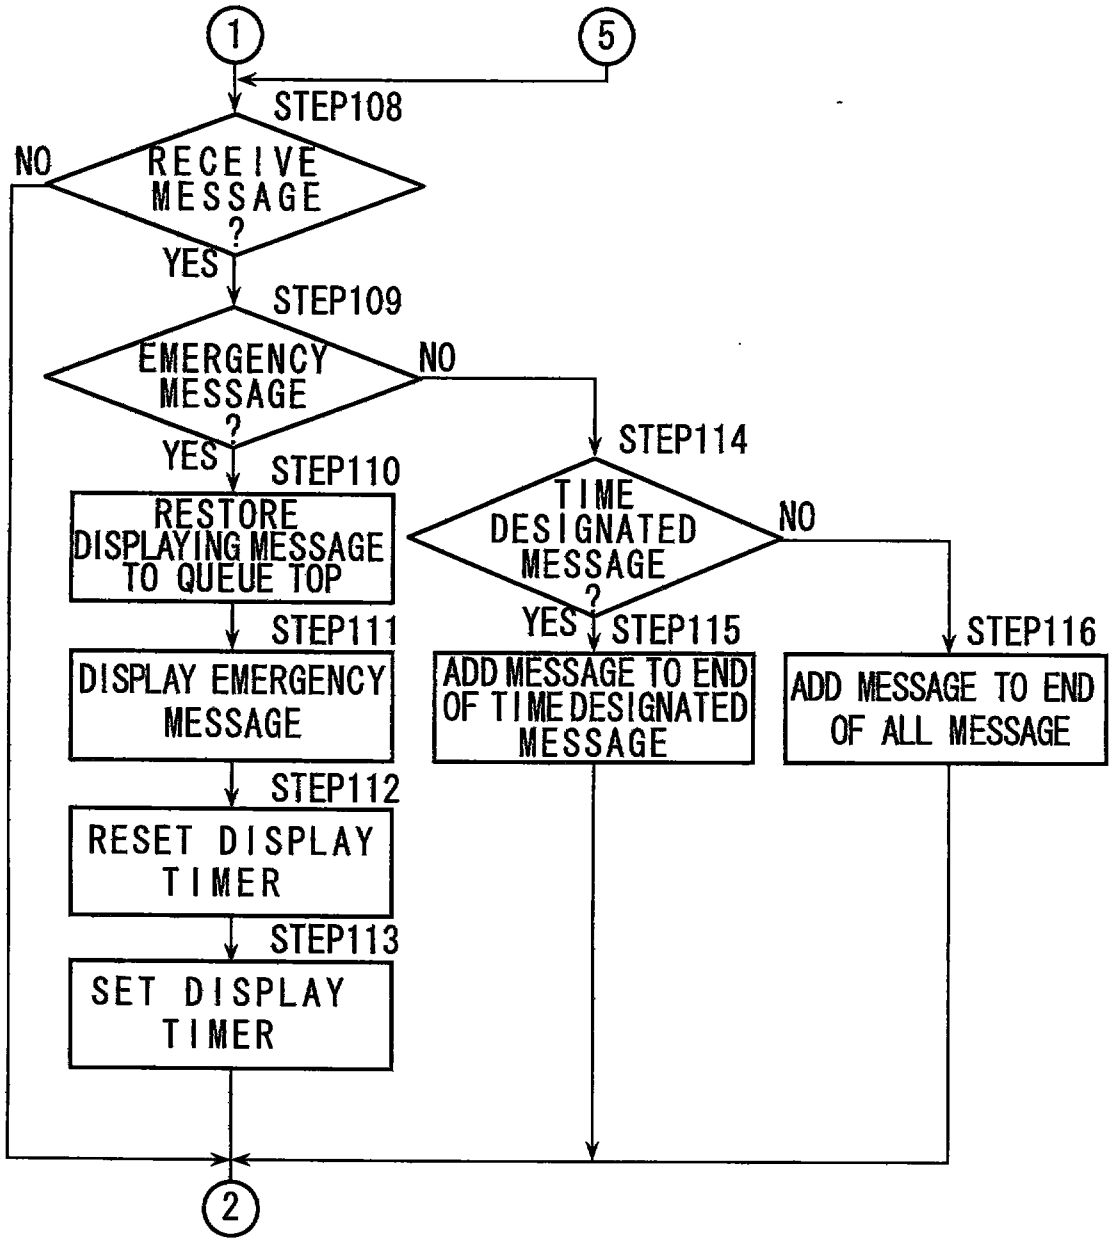

1
5
STEP108
RECEIVE MESSAGE ?
NO
YES
STEP109
EMERGENCY MESSAGE ?
NO
YES
STEP110
RESTORE DISPLAYING MESSAGE TO QUEUE TOP
STEP111
DISPLAY EMERGENCY MESSAGE
STEP112
RESET DISPLAY TIMER
STEP113
SET DISPLAY TIMER
STEP114
TIME DESIGNATED MESSAGE ?
NO
YES
STEP115
ADD MESSAGE TO END OF TIME DESIGNATED MESSAGE
STEP116
ADD MESSAGE TO END OF ALL MESSAGE
2

FIG. 12

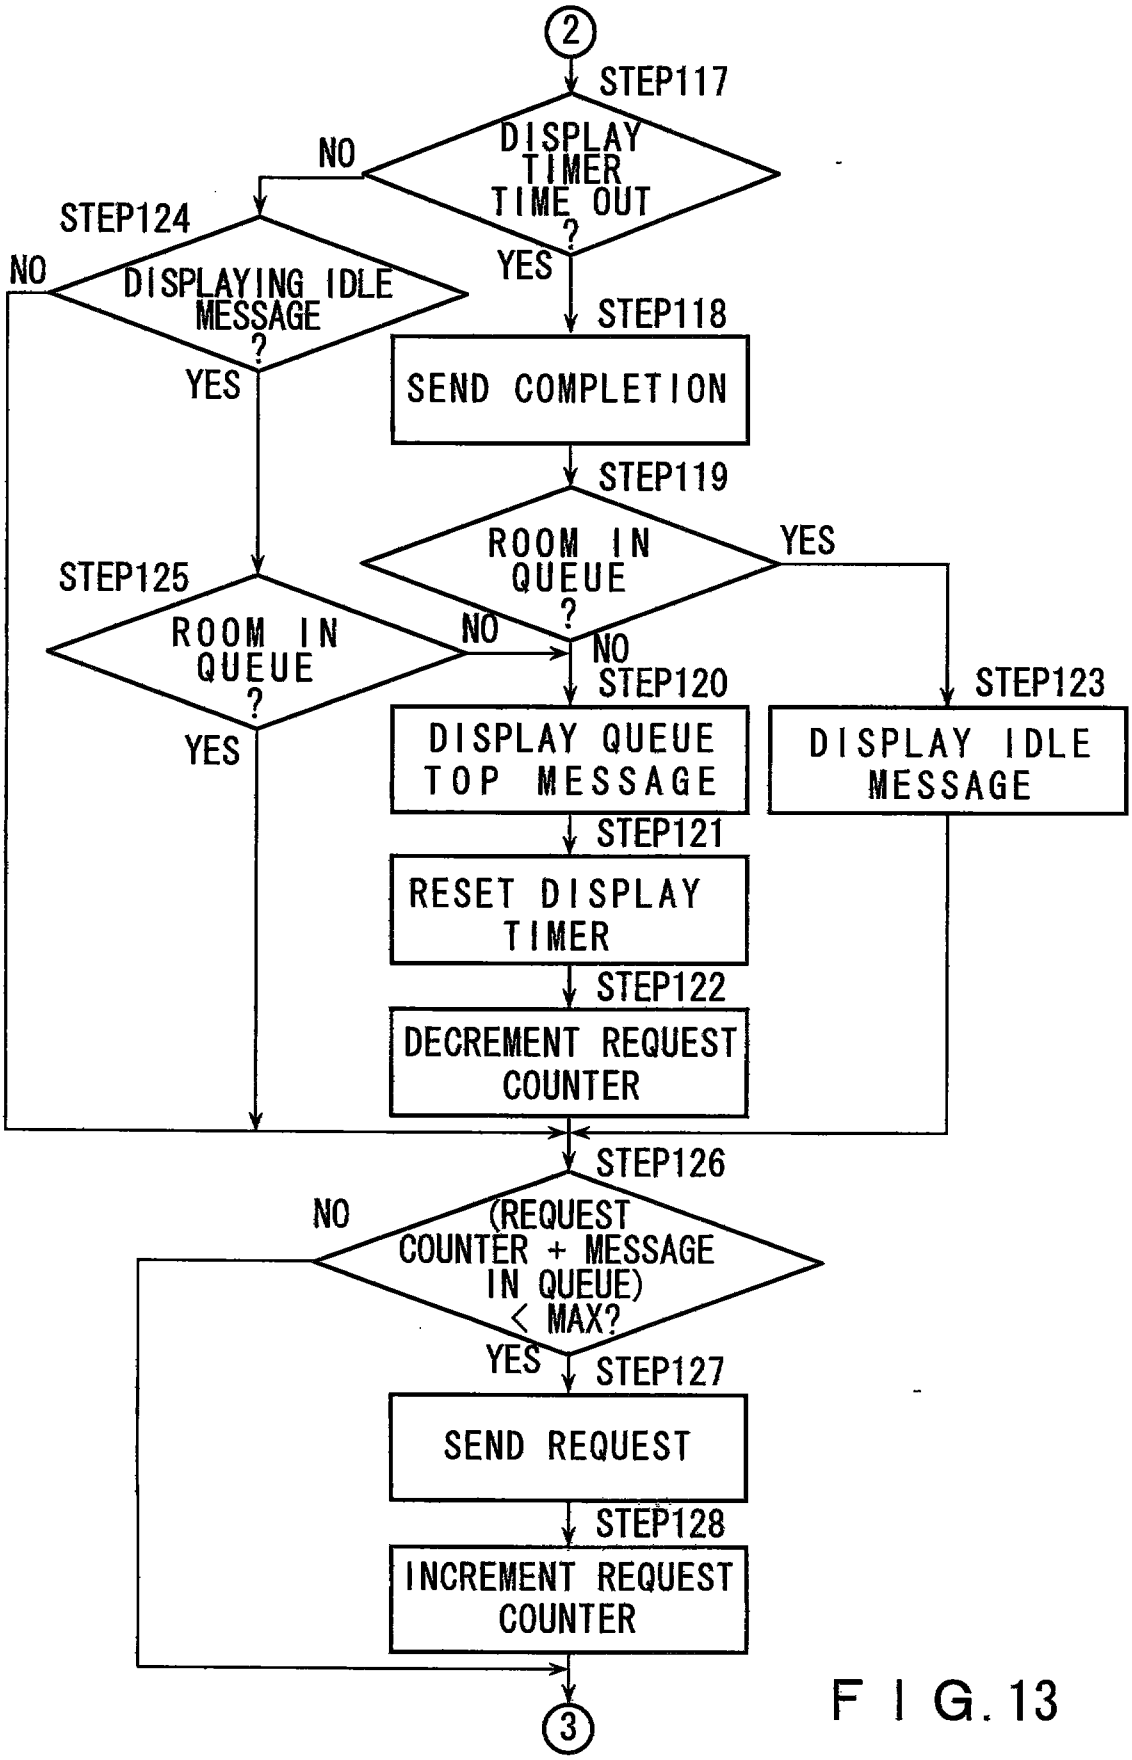

2
STEP117
DISPLAY TIMER TIME OUT ?
NO
YES
STEP124
DISPLAYING IDLE MESSAGE ?
NO
YES
STEP118
SEND COMPLETION
STEP119
ROOM IN QUEUE ?
YES
NO
STEP125
ROOM IN QUEUE ?
NO
YES
NO
STEP120
DISPLAY QUEUE TOP MESSAGE
STEP123
DISPLAY IDLE MESSAGE
STEP121
RESET DISPLAY TIMER
STEP122
DECREMENT REQUEST COUNTER
STEP126
(REQUEST COUNTER + MESSAGE IN QUEUE) < MAX?
NO
YES
STEP127
SEND REQUEST
STEP128
INCREMENT REQUEST COUNTER
3

FIG.13

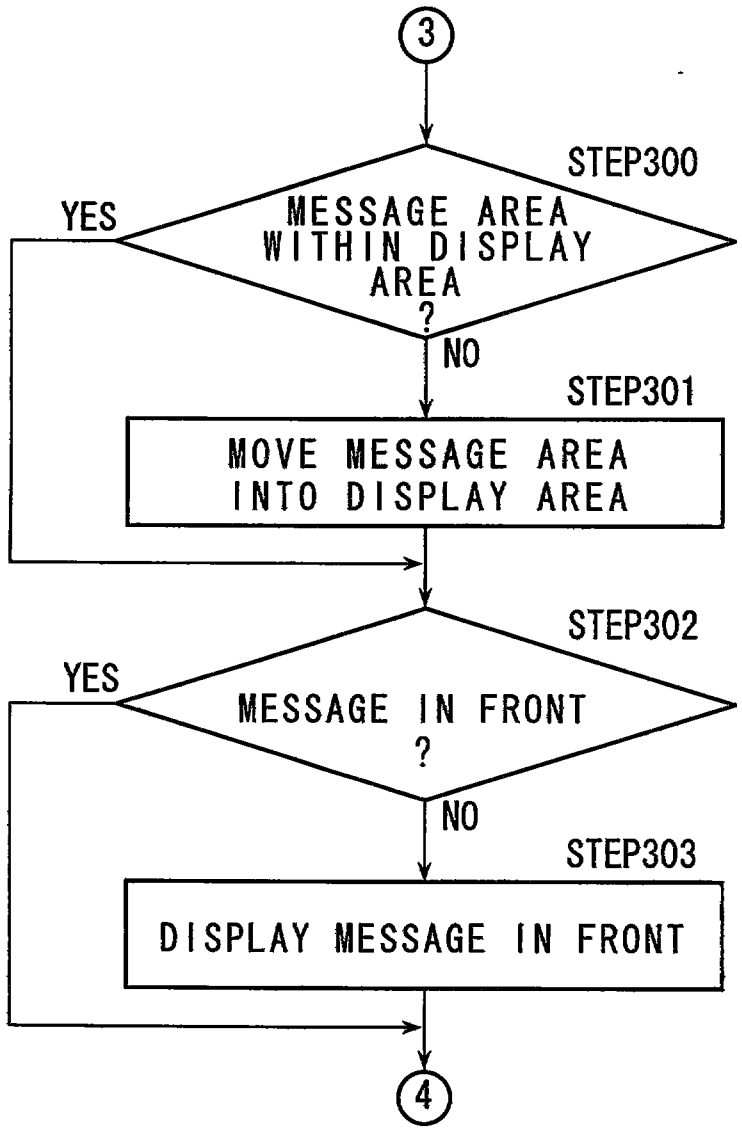


FIG. 14

This Sheet Has Been Replaced

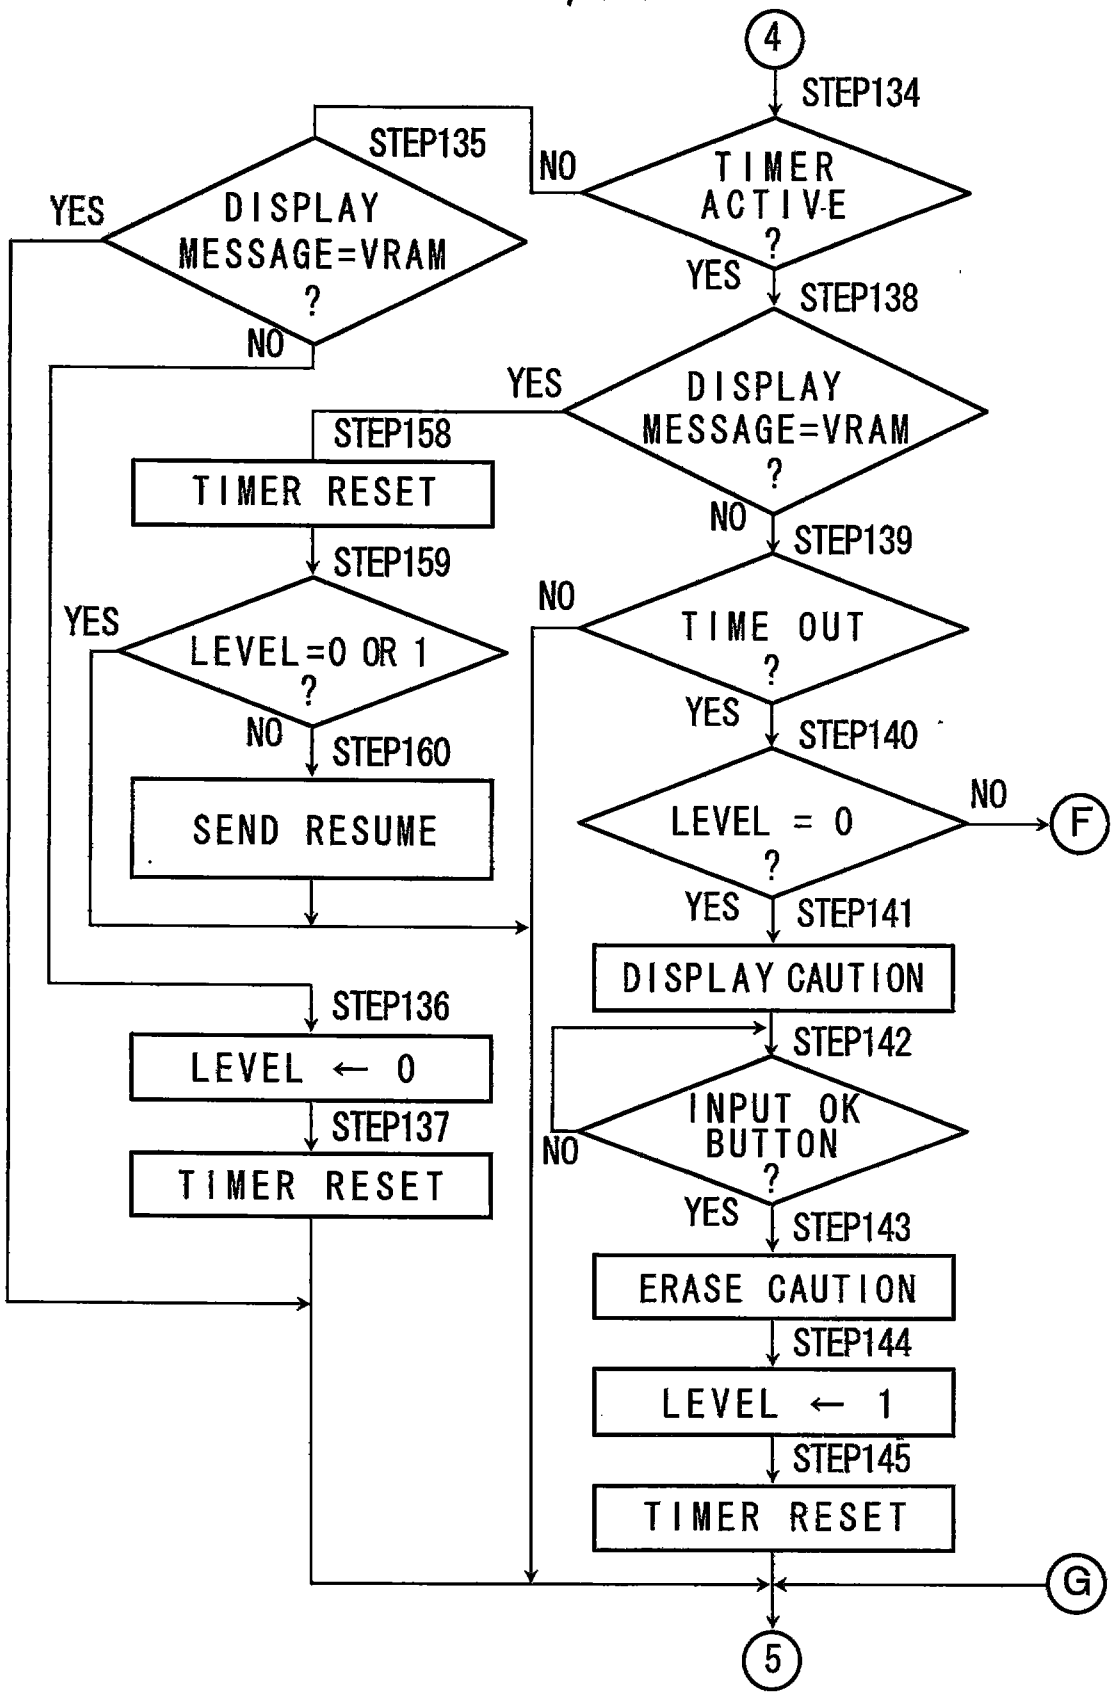
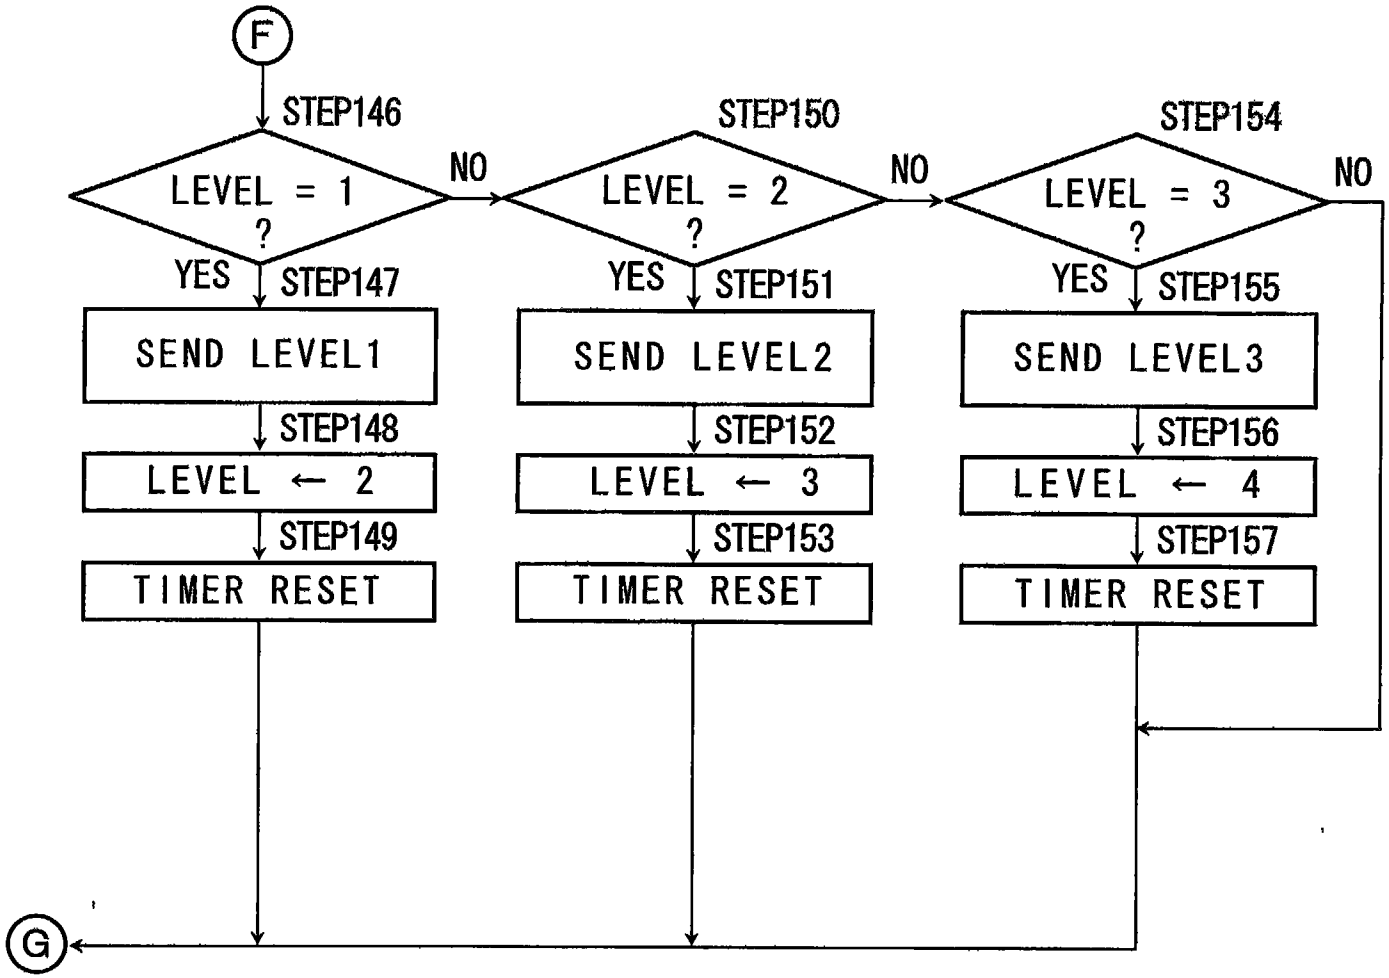

4
STEP134
TIMER ACTIVE ?
NO
YES
STEP135
DISPLAY MESSAGE=VRAM ?
YES
NO
STEP138
DISPLAY MESSAGE=VRAM ?
YES
NO
STEP158
TIMER RESET
STEP159
LEVEL=0 OR 1 ?
YES
NO
STEP160
SEND RESUME
STEP139
TIME OUT ?
NO
YES
STEP140
LEVEL = 0 ?
NO
F
YES
STEP141
DISPLAY CAUTION
STEP142
INPUT OK BUTTON ?
NO
YES
STEP143
ERASE CAUTION
STEP144
LEVEL ← 1
STEP145
TIMER RESET
STEP136
LEVEL ← 0
STEP137
TIMER RESET
G
5

FIG. 15


F
STEP146
LEVEL = 1 ?
NO
YES
STEP147
SEND LEVEL1
STEP148
LEVEL ← 2
STEP149
TIMER RESET
STEP150
LEVEL = 2 ?
NO
YES
STEP151
SEND LEVEL2
STEP152
LEVEL ← 3
STEP153
TIMER RESET
STEP154
LEVEL = 3 ?
NO
YES
STEP155
SEND LEVEL3
STEP156
LEVEL ← 4
STEP157
TIMER RESET
G

F I G. 16

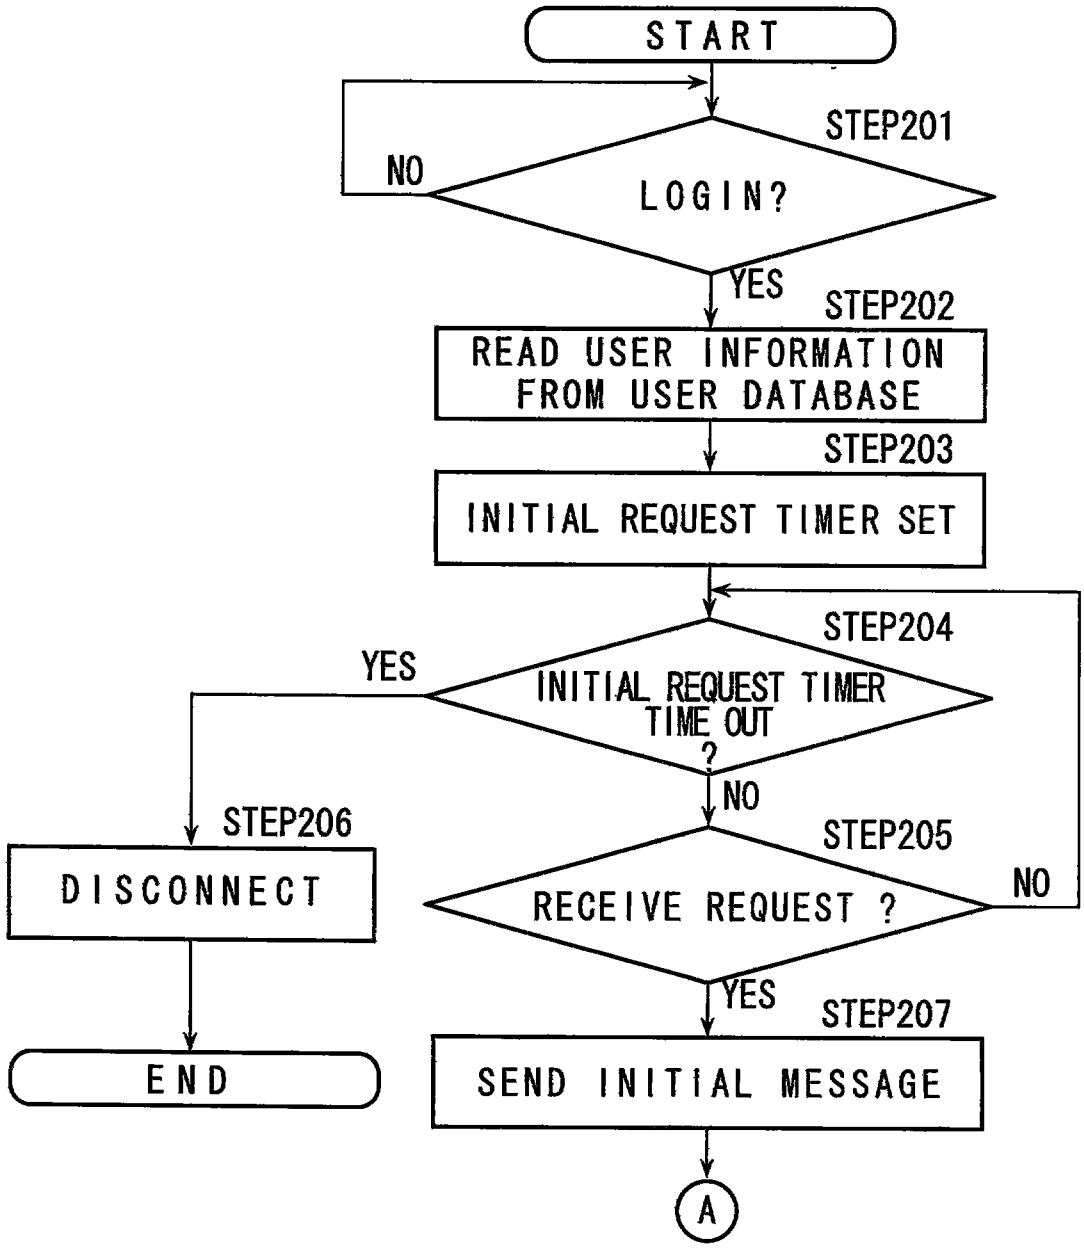

START
STEP201
NO
LOGIN?
YES
STEP202
READ USER INFORMATION FROM USER DATABASE
STEP203
INITIAL REQUEST TIMER SET
STEP204
YES
INITIAL REQUEST TIMER TIME OUT ?
NO
STEP206
STEP205
DISCONNECT
RECEIVE REQUEST ?
NO
YES
STEP207
END
SEND INITIAL MESSAGE
A

FIG. 17

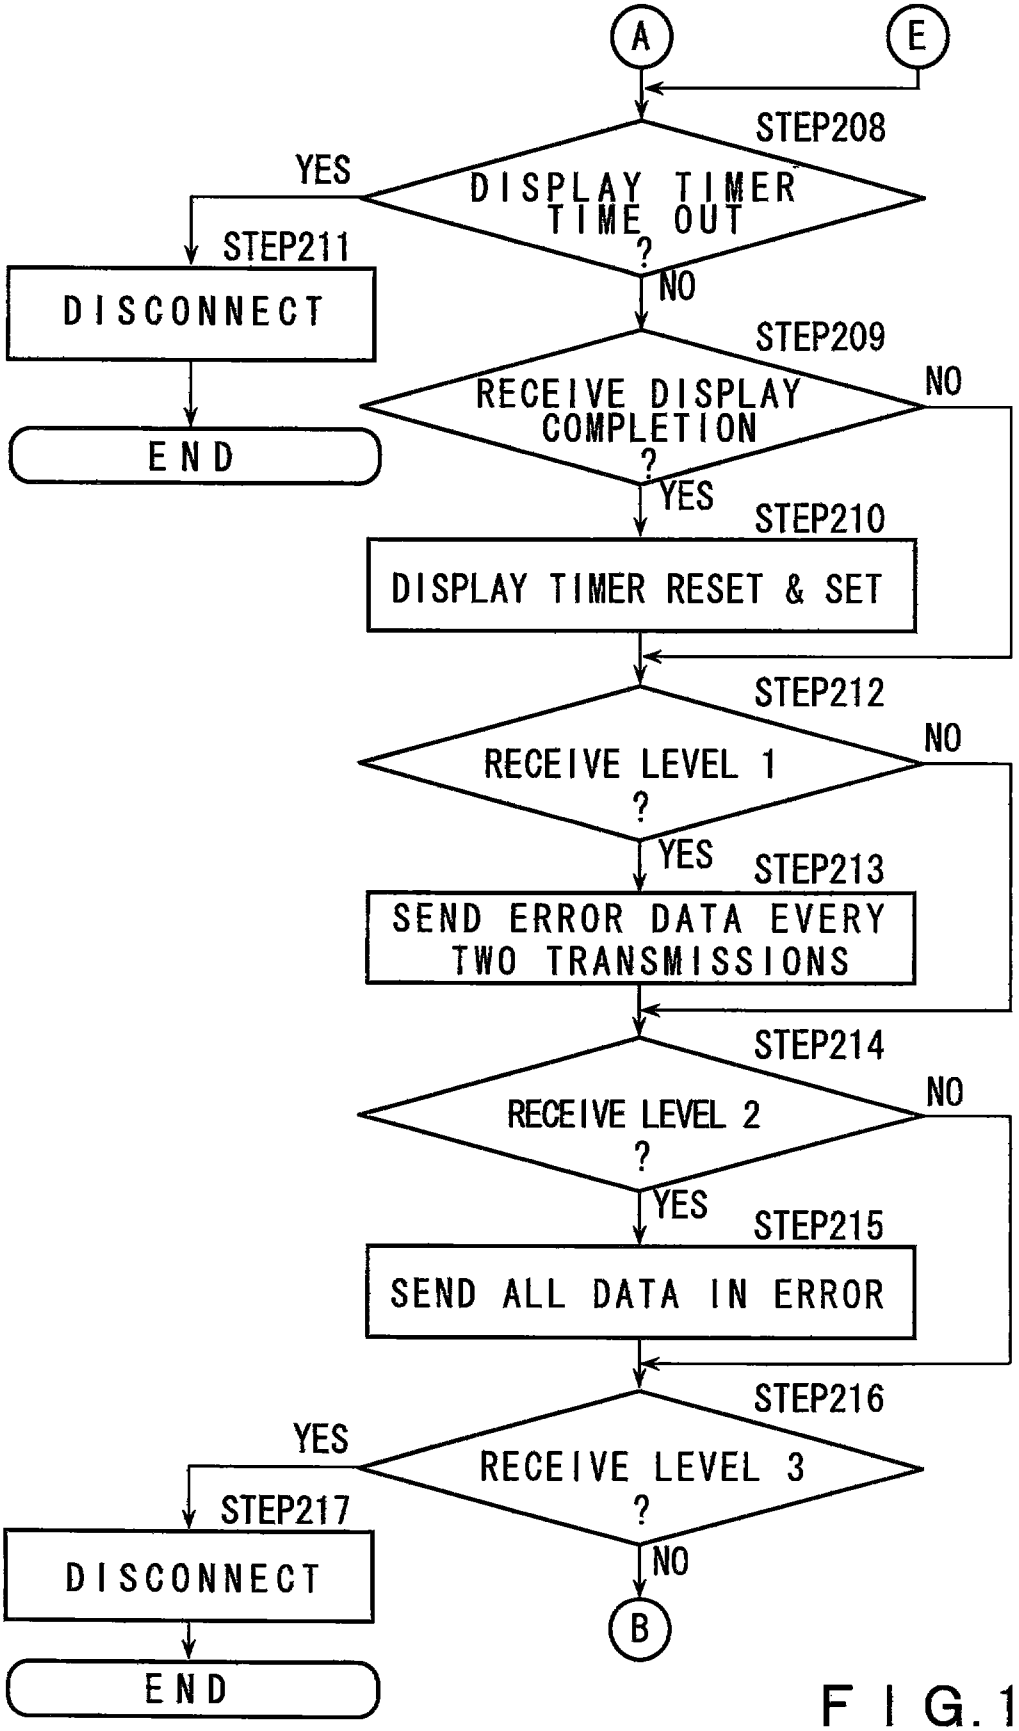

A
E
STEP208
DISPLAY TIMER TIME OUT ?
YES
NO
STEP211
DISCONNECT
END
STEP209
RECEIVE DISPLAY COMPLETION ?
NO
YES
STEP210
DISPLAY TIMER RESET & SET
STEP212
RECEIVE LEVEL 1 ?
NO
YES
STEP213
SEND ERROR DATA EVERY TWO TRANSMISSIONS
STEP214
RECEIVE LEVEL 2 ?
NO
YES
STEP215
SEND ALL DATA IN ERROR
STEP216
RECEIVE LEVEL 3 ?
YES
NO
STEP217
DISCONNECT
END
B

FIG. 18

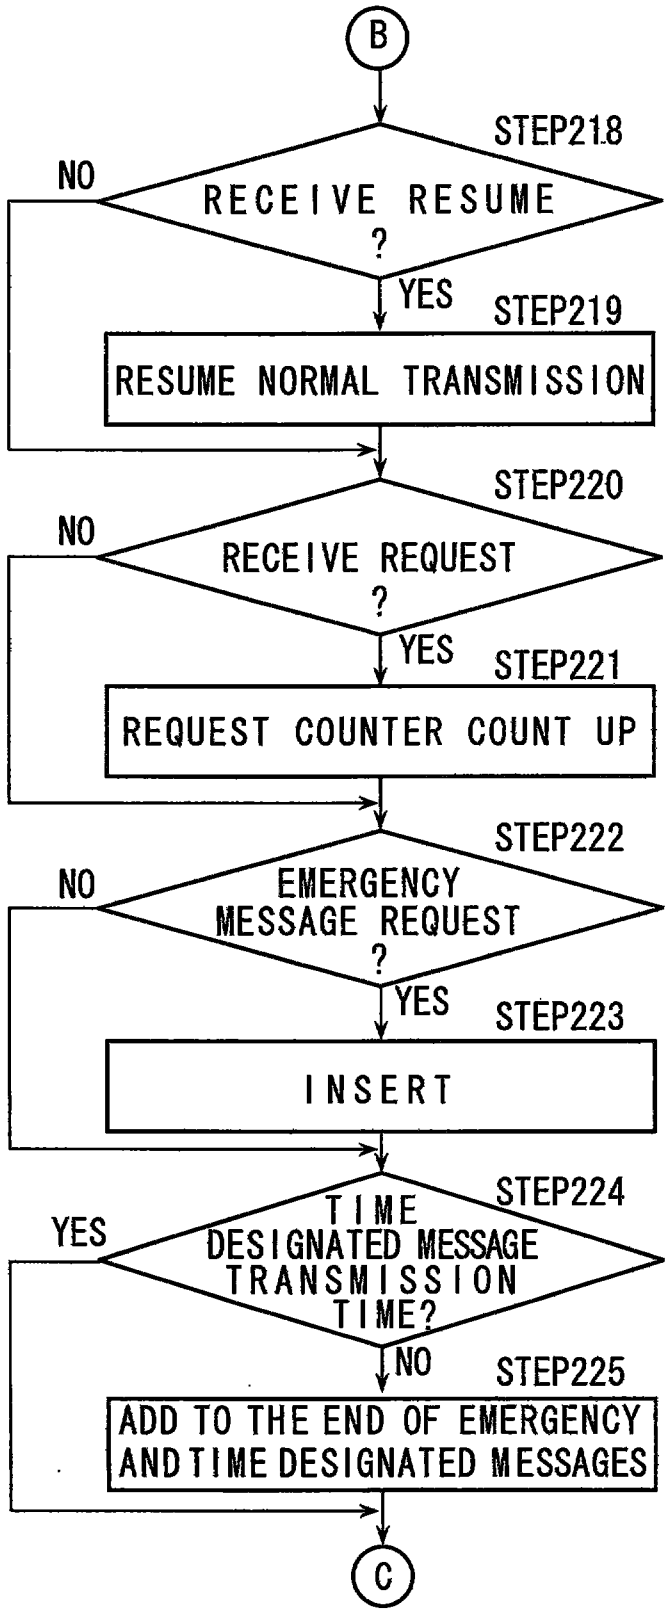
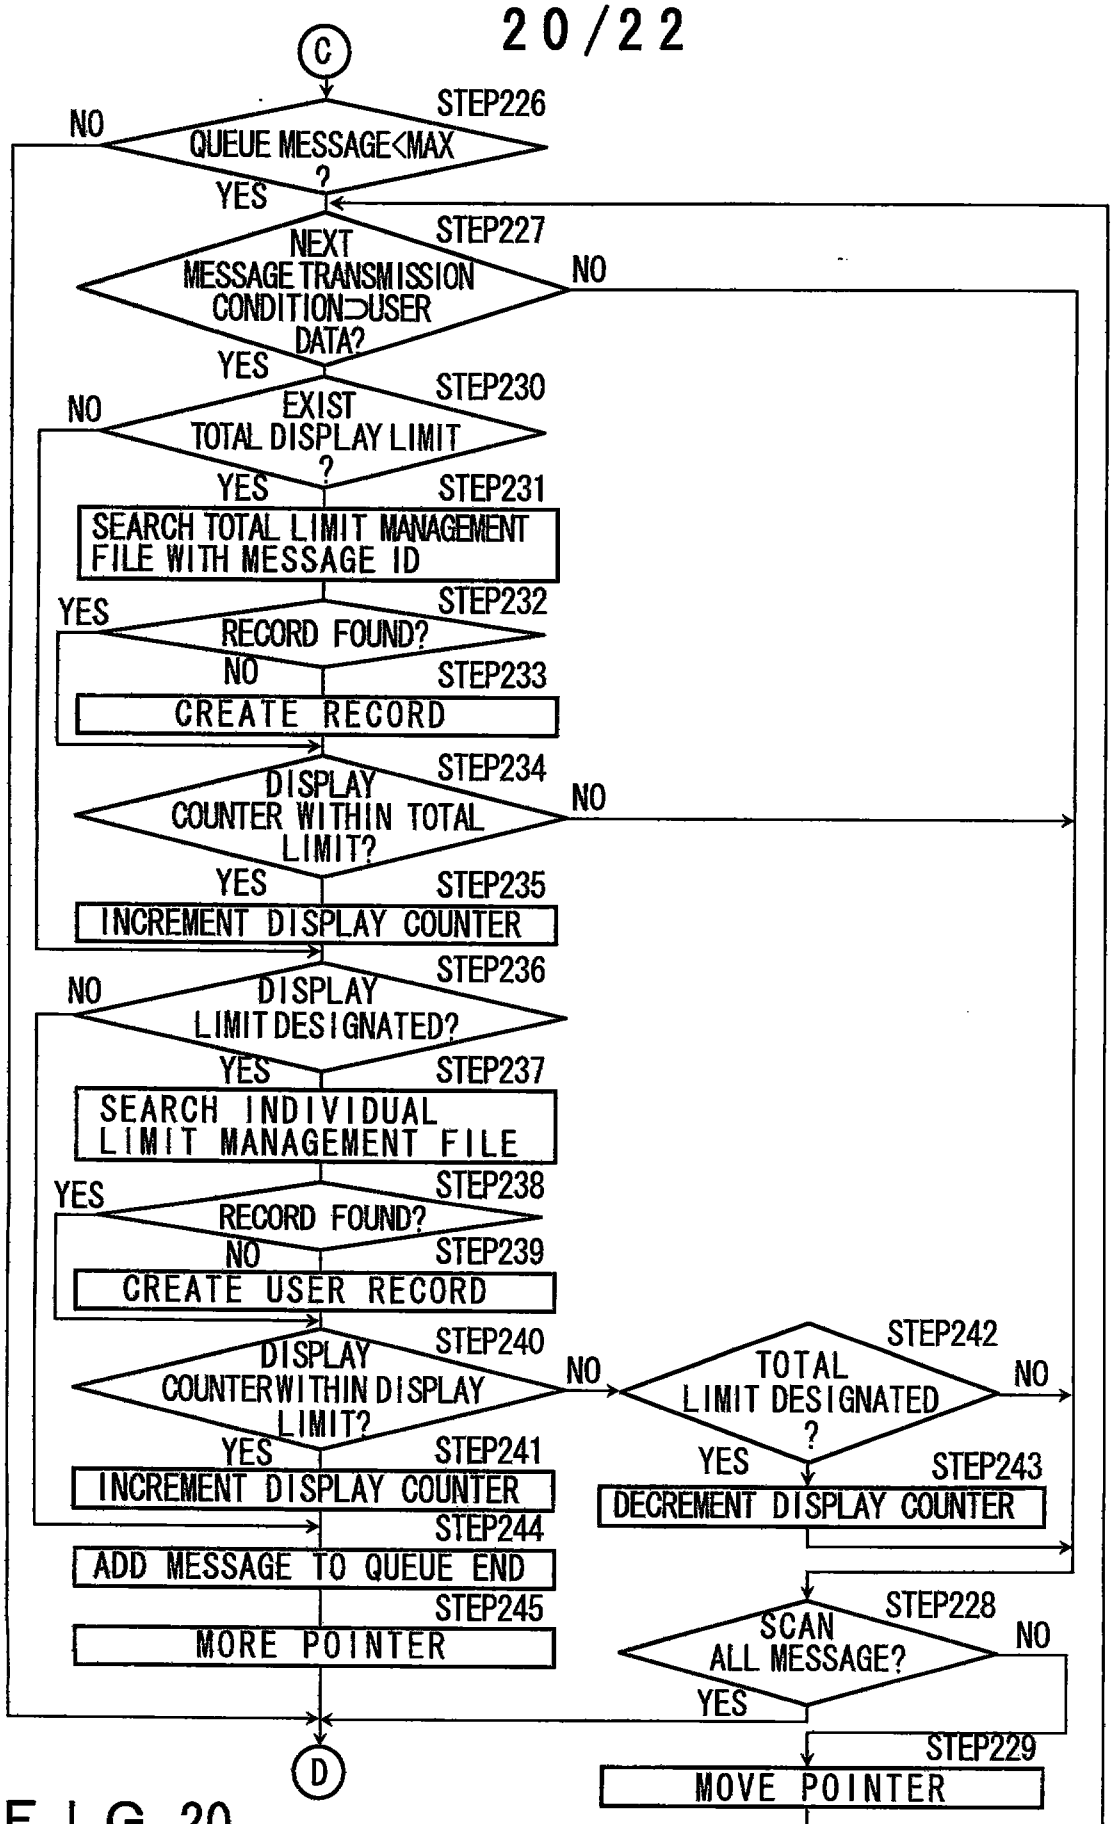

B
STEP218
NO
RECEIVE RESUME ?
YES
STEP219
RESUME NORMAL TRANSMISSION
STEP220
NO
RECEIVE REQUEST ?
YES
STEP221
REQUEST COUNTER COUNT UP
STEP222
NO
EMERGENCY MESSAGE REQUEST ?
YES
STEP223
INSERT
STEP224
YES
TIME DESIGNATED MESSAGE TRANSMISSION TIME?
NO
STEP225
ADD TO THE END OF EMERGENCY AND TIME DESIGNATED MESSAGES
C

FIG. 19


C
STEP226
NO
QUEUE MESSAGE<MAX ?
YES
NEXT MESSAGE TRANSMISSION CONDITION⊃USER DATA?
STEP227
NO
YES
EXIST TOTAL DISPLAY LIMIT ?
STEP230
NO
YES
SEARCH TOTAL LIMIT MANAGEMENT FILE WITH MESSAGE ID
STEP231
YES
RECORD FOUND?
STEP232
NO
CREATE RECORD
STEP233
DISPLAY COUNTER WITHIN TOTAL LIMIT?
STEP234
NO
YES
INCREMENT DISPLAY COUNTER
STEP235
DISPLAY LIMIT DESIGNATED?
STEP236
NO
YES
SEARCH INDIVIDUAL LIMIT MANAGEMENT FILE
STEP237
YES
RECORD FOUND?
STEP238
NO
CREATE USER RECORD
STEP239
DISPLAY COUNTERWITHIN DISPLAY LIMIT?
STEP240
NO
YES
INCREMENT DISPLAY COUNTER
STEP241
TOTAL LIMIT DESIGNATED ?
STEP242
NO
YES
DECREMENT DISPLAY COUNTER
STEP243
ADD MESSAGE TO QUEUE END
STEP244
MORE POINTER
STEP245
SCAN ALL MESSAGE?
STEP228
NO
YES
MOVE POINTER
STEP229
D

F I G. 20

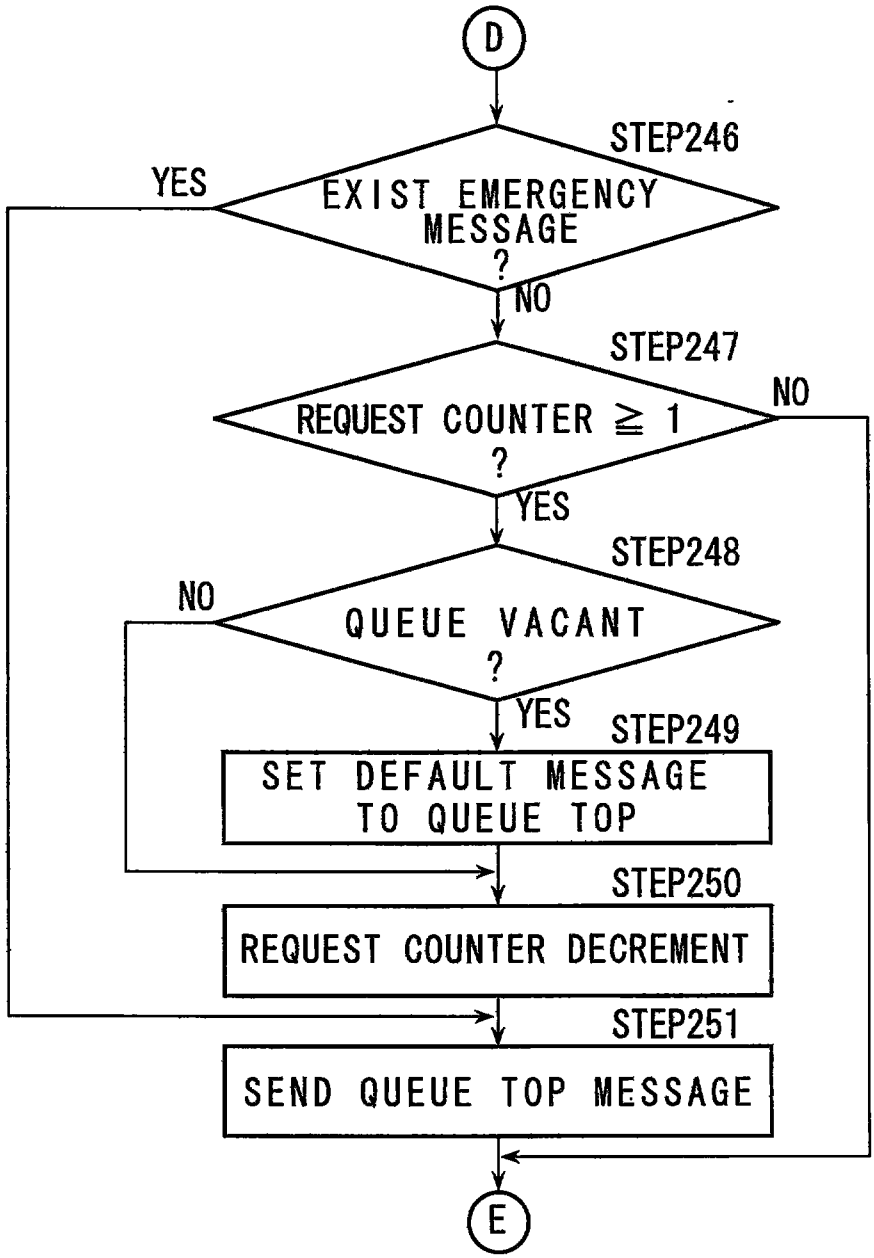

D
STEP246
EXIST EMERGENCY MESSAGE ?
YES
NO
STEP247
REQUEST COUNTER ≧ 1 ?
NO
YES
STEP248
QUEUE VACANT ?
NO
YES
STEP249
SET DEFAULT MESSAGE TO QUEUE TOP
STEP250
REQUEST COUNTER DECREMENT
STEP251
SEND QUEUE TOP MESSAGE
E

FIG. 21

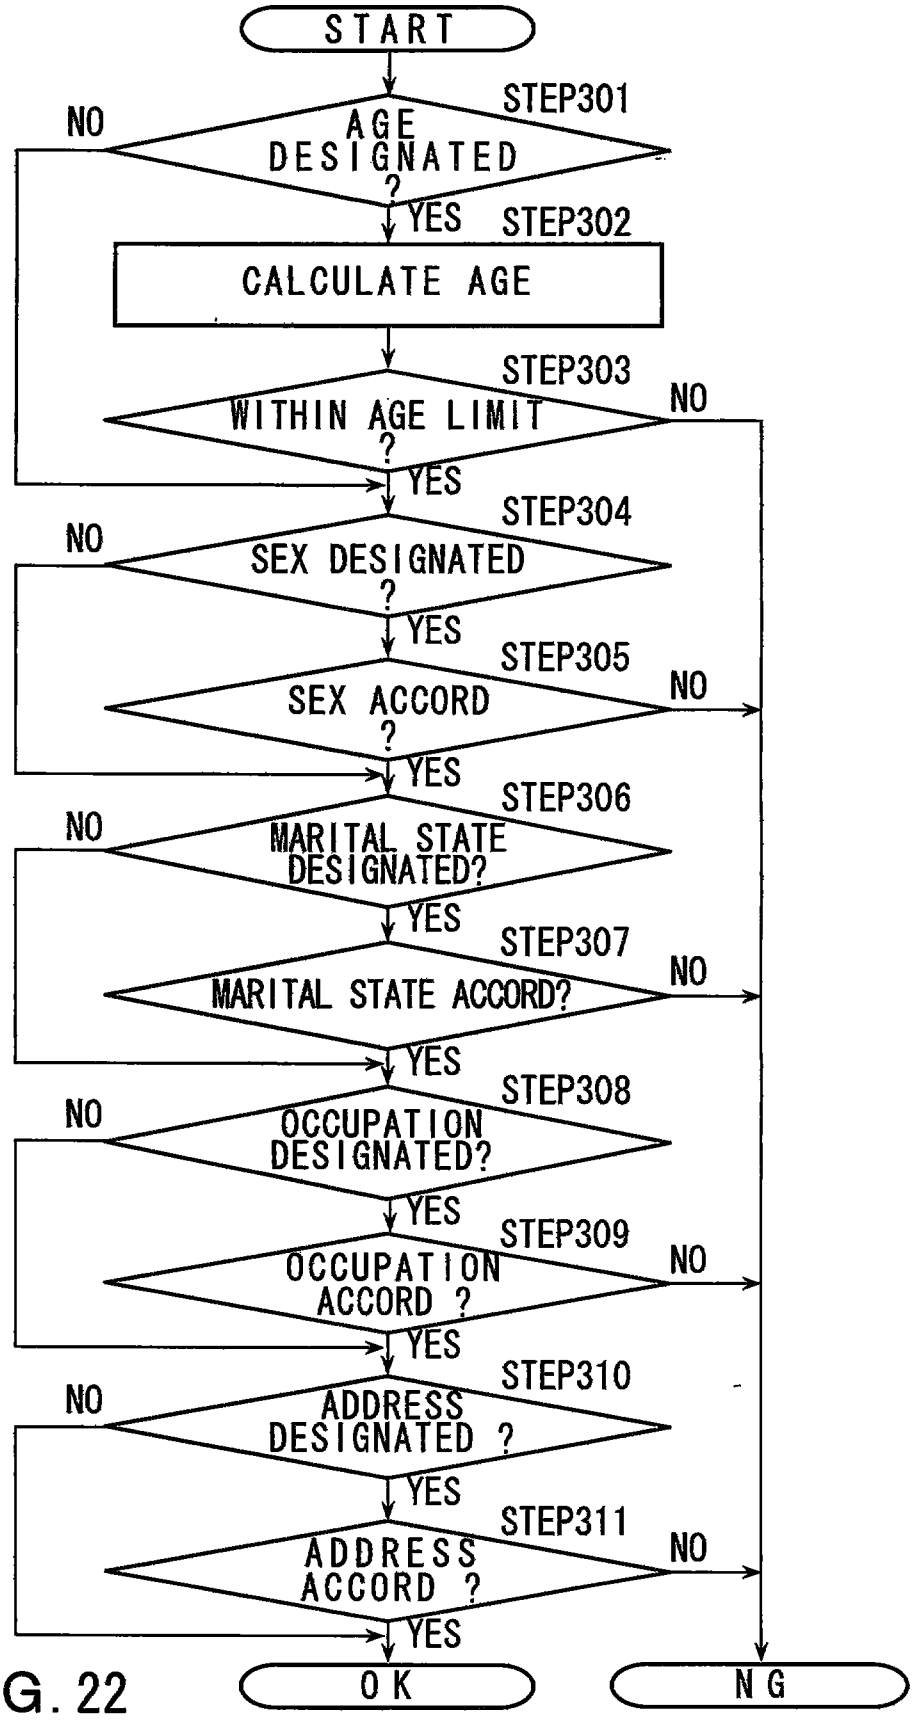

START
STEP301
AGE DESIGNATED ?
NO
YES
STEP302
CALCULATE AGE
STEP303
WITHIN AGE LIMIT ?
NO
YES
STEP304
SEX DESIGNATED ?
NO
YES
STEP305
SEX ACCORD ?
NO
YES
STEP306
MARITAL STATE DESIGNATED?
NO
YES
STEP307
MARITAL STATE ACCORD?
NO
YES
STEP308
OCCUPATION DESIGNATED?
NO
YES
STEP309
OCCUPATION ACCORD ?
NO
YES
STEP310
ADDRESS DESIGNATED ?
NO
YES
STEP311
ADDRESS ACCORD ?
NO
YES
OK
NG

FIG. 22

WHAT IS CLAIMED IS:

1. An information display system comprising an information provider having a display information providing means for providing a display information received from a communication network to a user and a terminal having a connecting means which freely connects to and disconnects from the information provider via a communication line,

wherein the terminal has:

means for transmitting a request information for identifying specific display information, which the user designates from among the display information, to the information provider via the communication line;

means for receiving the specific display information, which is transferred from the information provider based on the request information, from the information provider via the communication line;

means for receiving additional display information, which is not designated by the user, from the information provider via the communication line while receiving the specific display information at the same time;

a display for displaying an image;

means for displaying the specific display information, which has been received from the information provider, on a first display region installed on the display;

means for displaying the additional display information, which has been received from the information provider, on a second display region installed on the display; and

means for updating periodically the additional display information displayed on the second display region.

2. An information display system as claimed in claim 1, wherein the terminal further has means for controlling the additional display information so as to cause the terminal to

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

display the additional display information on the most front surface of the display.

3. An information display system as claimed in claim 2, wherein the terminal further has:

an additional display information judging means for judging whether the entire additional display information is displayed inside a displayable range of the display or not; and

means for shifting the entire additional display information so as to display the entire additional display information inside the displayable range of the display when the additional display information judging means judges that the entire additional display information is not displayed inside the displayable range of the display.

4. An information display system as claimed in claim 3, wherein the terminal further has a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not,

the information display system further comprising a warning means for issuing a warning on the display of the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

5. An information display system as claimed in claim 4, wherein the warning means further has a warning displaying means for displaying the warning on the display of the terminal.

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



6. An information display system as claimed in claim 4, wherein the specific display information is updatable and the terminal further has an updated display information delaying means which delays displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state within a prescribed length of time after the warning means issues a warning.

7. An information display system as claimed in claim 6, wherein the terminal further has an updated specific display information display stopping means which stops displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state within a prescribed length of time after the updated display information delaying means starts delaying displaying the updated specific display information.

8. An information display system as claimed in claim 7, wherein the terminal further has a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state within a prescribed length of time after the updated specific display information display stopping means stops displaying the updated specific display information.

9. An information display system as claimed in claim 3, wherein the specific display information is updatable and the terminal further has:

a normal display state detecting means for detecting whether the entire additional display information is in a

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

an updated specific information display delaying means which delays displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

10. An information display system as claimed in claim 9, wherein the updated specific display information delaying means delays displaying the updated specific display information by delaying a normal transmission of the specific display information from the display information provider to the terminal.

11. An information display system as claimed in claim 9, further comprising a delay releasing means for releasing the specific display information delay of the updated specific display information by the updated display delaying means when the normal display state detecting means detects that the entire additional display information is in the normal display state within a prescribed length of time after the updated specific display information delaying means delays the display of the updated specific display information.

12. An information display system as claimed in claim 3, wherein at least the specific display information is updatable, and the terminal further has:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

THIS SHEET HAS BEEN REPLACED

* C L M S *

an updated specific display information stopping means which stops displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

13. An information display system as claimed in claim 12, wherein the updated specific information display stopping means stops displaying the updated specific display information by stopping a normal transmission of the specific display information from the display information provider to the terminal.

14. An information display system as claimed in claim 12, further comprising an updated specific display information stop releasing means for releasing the stop of the updated specific display information by the updated display information stopping means when the normal display state detecting means detects that the entire additional display information is in the normal display state within a prescribed length of time after the updated specific information display stopping means stops the display of the updated specific display information.

15. An information display system as claimed in claim 3, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal display state detecting means

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced

detects that the entire additional display information is not in the normal display state.

16. An information provider which transfers a plurality of display information, which the information provider receives from a communication network, to a terminal having a display comprising:

a connecting means which freely connects to and disconnects from the terminal using a communication line;

a request information receiving means for receiving via the communication line a request information which identifies a specific display information, which a user of the terminal designates directly, from among the plurality of display information;

an additional information transmitting means for transmitting a plurality of additional display information, which are information other than the information that are received from the communication network and transferred to the terminal, to the terminal;

an additional information selecting means for selecting an additional display information from among the plurality of additional display information based on a prescribed condition regardless of whether the user of the terminal designates a specific display information or not; and

an additional display information transmitting means for transmitting in parallel the specific display information and the additional display information selected by the additional information selecting means so as to display the specific display information and the selected additional display information on the terminal.

17. An information provider as claimed in claim 16, further

This Sheet Has Been Replaced
THIS SHEET HAS BEEN REPLACED

* C L M S *

comprising means for displaying the specific display information and the selected additional display information on different display regions of the display, respectively.

18. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

a warning means for issuing a warning to the display of the terminal when the normal display state detecting means has detected that the entire additional display information is not in the normal display state.

19. An information provider as claimed in claim 18, wherein the warning means has a warning displaying means for displaying a warning on the display.

20. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

an display information update delaying means which delays updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

21. An information provider as claimed in claim 20, wherein

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

the display information update delaying means delays updating the specific display information by delaying a normal transmission of the specific display information from the display information provider to the terminal.

22. An information provider as claimed in claim 20, further comprising a display information update delay releasing means for releasing the specific display information update delay of the specific display information by the display information update delaying means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

23. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

a specific information display update stopping means which stops updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

24. An information provider as claimed in claim 23, wherein the specific display information update stopping means stops updating the specific information display by stopping a normal transmission of the specific display information from the display information provider to the terminal.

25. An information provider as claimed in claim 23, further

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

comprising a specific display information update stop releasing means for releasing the specific display information update stop by the specific display information update stopping means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

26. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display or not; and

a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

27. An information provider as claimed in claim 26, wherein the terminal has a display memory for storing a content displayed on the display, and the normal display state detecting means detects whether the additional display information is displayed in the normal display state or not by detecting whether a content of the display memory displayed in a display region of the additional display information matches the additional display information transmitted from the information provider.

28. An information provider as claimed in claim 16, further comprising means for controlling the additional display information so as to display the additional display information on the most front surface of the display.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

29. An information provider as claimed in claim 16, further comprising:

a most front surface display state detecting means for detecting whether the entire additional display information is displayed on the most front surface of the display or not; and

a warning means for issuing a warning to the terminal when the entire additional display information is not in the most front surface display state.

30. An information provider as claimed in claim 29, wherein the warning means has a warning displaying means for displaying the warning on the display.

31. An information provider as claimed in claim 29, further comprising a specific display information display delaying means which delays displaying the specific display information when the most front surface display state detecting means detects that the entire additional display information is not in the most front surface display state.

32. An information provider as claimed in claim 29, further comprising a specific information display update stopping means which stops updating the specific display information when the most front surface display state detecting means detects that the entire additional display information is not displayed on the most front surface of the display.

33. An information provider as claimed in claim 29, further comprising a communication disconnecting means which disconnects a communication between the information provider and the terminal when the most front surface display state detecting means detects that the entire additional display

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

information is not displayed on the most front surface of the display.

34. An information provider as claimed in claim 16, further comprising:

an additional display information display state judging means for judging whether the entire additional display information is displayed within a displayable range of the display or not; and

means shifting the entire additional display information into the displayable range of the display when the additional display information display state judging means judges that the entire additional display information is not displayed within the displayable range of the display.

35. An information provider as claimed in claim 34, further comprising:

a normal additional display information display state detecting means for detecting whether the entire additional display information is displayed within the displayable range of the display or not; and

a normal additional display information display state warning means for issuing a warning to the terminal when normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

36. An information provider as claimed in claim 35, wherein the normal additional display information display state warning means has a normal additional display information display state warning displaying means for displaying the normal additional display information display state warning.

37. An information provider as claimed in claim 35, further

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

comprising a specific display information display delaying means which delays displaying the specific display information when the normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

38. An information provider as claimed in claim 35, further comprising a specific display information display update stopping means which stops updating the specific display information when the normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

39. An information provider as claimed in claim 35, further comprising a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

40. An information provider as claimed in claim 16, further comprising a message database which holds the plurality of additional display information together with display conditions attached to the plurality of additional display information in correspondence, respectively, wherein the additional information selecting means selects the additional display information from among the plurality of additional display information in accordance with the display conditions held in the message database.

41. An information provider as claimed in claim 40, wherein

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED



the display conditions include type specific information of a user for displaying each of the additional display information, the information provider further comprising a user database which holds type specific information of a user of the terminal, the additional information selecting means further having:

a type specific information readout means for reading out the type specific information of each user from the user database; and

a type specific additional display information selecting means which selects the additional display information matching the display condition from the message database, using the type specific information that the type specific information readout means reads out from the user database.

42. An information provider as claimed in claim 41, wherein the type specific information on the user includes at least one of the age, gender, marital history, profession, and address of the user.

43. An information provider as claimed in claim 40, wherein each of the display conditions includes a display count upper limit for each user of the terminal, the information provider further comprising:

a transmission count counting means for counting a transmission count of each additional display information to the terminal for each user of the terminal; and

a transmission prohibiting means which prohibits a transmission of the additional display information to the terminal after the transmission count reaches the display count upper limit.

44. An information provider as claimed in claim 43, wherein

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

* C L M S *

the display count upper limit is a display count upper limit within a prescribed time interval.

45. An information provider as claimed in claim 41, wherein the display condition includes a display count total upper limit for each additional display information, the information provider further comprising:

a transmission count counting means for counting a transmission count of each additional display information to the terminal; and

a transmission prohibiting means which prohibits a transmission of the additional display information to the terminal after the transmission count reaches the display count total upper limit.

46. An information provider as claimed in claim 45, wherein the display count total upper limit is a display count total upper limit within a prescribed time interval.

47. An information provider as claimed in claim 40, wherein the display condition includes request display time of each additional display information, the information provider further comprising an additional display information transmitting means which transmits the additional display information to the terminal when current time reaches the request display time.

48. An information provider as claimed in claim 16, wherein the information provider is connected to an internet and the terminal has an internet information requesting means which requests an information as the specific display information on the internet, the information provider further comprising an internet information transmitting means which selects an

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

information on the internet and transmits the information to the terminal in response to a request from the terminal.

49. An information provider as claimed in claim 48, wherein the information provider sequentially transmits the additional display information, and periodically updates the additional display information on the display.

50. An information provider as claimed in claim 49, further comprising an advertisement information transmitting means which transmits an advertisement information on a commercial product or service as the additional display information to the terminal.

51. A recording medium which stores a program for operating a terminal having a display and a communication line connecting means for freely connecting to and disconnecting from a communication line, wherein the program has:

a communication line connecting means which causes the terminal to connect to an information provider that is capable of providing a plurality of display information that the information provider receives from a communication network via the communication line;

a request transmitting means for transmitting a request which causes the terminal to show the display information that a user of the terminal designates;

means for causing the terminal to receive from the information provider a specific display information that the request specifies and selects from among the plurality of display information;

an additional display information receiving means which causes the terminal to receive an additional display information in parallel with the specific display information, which is a display information not designated by the user,

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

from the information provider using the communication line; and

an information displaying means which causes the terminal to display the specific display information and the additional display information onto different display regions installed on the display, respectively.

52. A recording medium as claimed in claim 51, wherein the program further has:

an information display judging means which causes the terminal to judge whether the entire additional display information is displayed within a displayable range of the display or not; and

means for causing the terminal to shift the entire additional display information into the displayable range of the display when the information display judging means judges that the entire additional display information is not displayed within the displayable range of the display.

53. A recording medium as claimed in claim 51, wherein the program further has:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display or not; and

a warning means which causes the terminal to issue a warning to the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

54. A recording medium as claimed in claim 53, wherein the

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

warning means includes a warning displaying means which causes the terminal to display a warning on the display.

55. A recording medium as claimed in claim 51, wherein the program further has:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display or not; and

a specific display information update delaying means which causes the terminal to delay updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

56. A recording medium as claimed in claim 55, wherein the specific display information update delaying means causes the terminal to delay updating the specific display information by delaying a normal transmission of the specific display information from the information provider to the terminal.

57. A recording medium as claimed in claim 55, wherein the program further has a specific display information update delay releasing means which causes the terminal to release the delay of the specific display information update by the specific display information update delaying means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

58. A recording medium as claimed in claim 51, wherein the program further has:

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced





a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display or not; and

a specific display information update stopping means which causes the terminal to stop updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.


59. A recording medium as claimed in claim 58, wherein the specific display information update stopping means causes the terminal to stop updating the specific display information by stopping a normal transmission of the specific display information from the information provider to the terminal.

60. A recording medium as claimed in claim 58, wherein the program further has a specific display information update stop releasing means which causes the terminal to release the stop of the specific display information update by the normal display state detecting means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

61. A recording medium as claimed in claim 51, wherein the program further has:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display or not; and

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

* C L M S *

a communication disconnecting means which causes the terminal to disconnect a communication between the information provider and the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

62. A recording medium as claimed in claim 61, wherein the terminal has a display memory for storing a display content of the display, and the normal display state detecting means detects whether the additional display information is displayed or not by detecting whether the content of additional display information stored in the display memory displayed on the display region matches the additional display information transmitted from the information provider or not.


63. A terminal which freely connects to and disconnects from an information provider having a function which transfers a plurality of display information that the information provider receives from a communication network via a communication line, comprising:

means for transmitting a request information for identifying a specific display information, which is directly designated by a user of the terminal, from among the plurality of display information to the information provider via the communication line;

a first specific display information receiving means which receives the specific information transmitted from the information provider based on the request information;

a second specific display information receiving means which receives an additional display information that is selected from among a plurality of additional display information not transferred from the communication network without requiring a designation by a user of the terminal;

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED
ANNEX of Preliminary Examination Report

* C L M S *

a display for displaying information; and

an information displaying means which displays the specific display information the first specific display information receiving means receives and the additional display information the second specific display information receiving means receive onto first and second display regions installed on the display, respectively.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

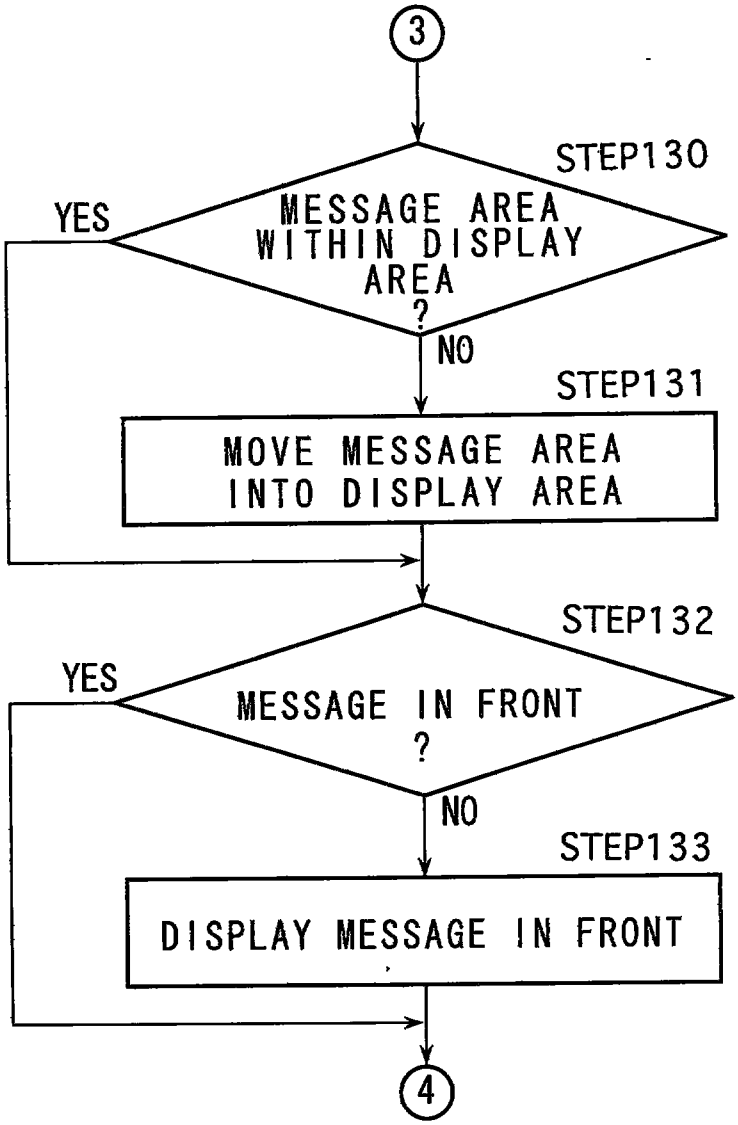

3
STEP130
MESSAGE AREA WITHIN DISPLAY AREA ?
YES
NO
STEP131
MOVE MESSAGE AREA INTO DISPLAY AREA
STEP132
MESSAGE IN FRONT ?
YES
NO
STEP133
DISPLAY MESSAGE IN FRONT
4

FIG. 14

REPLACEMENT SHEET
9804319-3

WHAT IS CLAIMED IS:



1. An information display system comprising an information provider having a display information providing means for providing a display information received from a communication network to a user and a terminal having a connecting means which freely connects to and disconnects from the information provider over a communication line,

wherein the terminal has:

means for transmitting a request information for identifying specific display information, which the user designates from the display information, to the information provider via the communication line;

means for receiving the specific display information from the information provider via the communication line based on the request information;

means for receiving additional display information, which is not designated by the user, from the information provider via the communication line while receiving the specific display information at the same time;

a display;

means for displaying the specific display information received from the information provider on a first display region on the display;

means for displaying the additional display information received from the information provider on a second display region on the display; and

means for updating periodically the additional display information displayed on the second display region.

2. An information display system as claimed in claim 1, wherein the terminal further has means for controlling the additional display information so as to cause the terminal to

REPLACEMENT SHEET
23 JUL 1999

REPLACEMENT SHEET

wherein the specific display information is updatable and the terminal further has an updated display information delaying means which delays displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state within a prescribed length of time after the warning means issues a warning.

7. An information display system as claimed in claim 6, wherein the terminal further has an updated specific display information display stopping means which stops displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state within a prescribed length of time after the updated display information delaying means starts delaying displaying the updated specific display information.

8. An information display system as claimed in claim 7, wherein the terminal further has a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state within a prescribed length of time after the updated specific display information display stopping means stops displaying the updated specific display information.

9. An information display system as claimed in claim 3, wherein the specific display information is updatable and the terminal further has:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display

REPLACEMENT SHEET
23 JUL 1999

display the additional display information on the most front surface of the display.

3. An information display system as claimed in claim 2, wherein the terminal further has:

an additional display information judging means for judging whether the entire additional display information is displayed inside a displayable range of the display ; and

means for shifting the entire additional display information so as to display the entire additional display information inside the displayable range of the display when the additional display information judging means judges that the entire additional display information is not displayed inside the displayable range of the display.

4. An information display system as claimed in claim 3, wherein the terminal further has a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display ,

the information display system further comprising a warning means for issuing a warning on the display of the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

5. An information display system as claimed in claim 4, wherein the warning means further has a warning displaying means for displaying the warning on the display of the terminal.

6. An information display system as claimed in claim 4,

REPLACEMENT SHEET
23 JUL 1999

information is displayed inside the displayable range on the most front surface of the display ; and

an updated specific information display delaying means which delays displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

10. An information display system as claimed in claim 9, wherein the updated specific display information delaying means delays displaying the updated specific display information by delaying a normal transmission of the specific display information from the display information provider to the terminal.

11. An information display system as claimed in claim 9, further comprising a delay releasing means for releasing the specific display information delay of the updated specific display information by the updated display delaying means when the normal display state detecting means detects that the entire additional display information is in the normal display state within a prescribed length of time after the updated specific display information delaying means delays the display of the updated specific display information.

12. An information display system as claimed in claim 3, wherein at least the specific display information is updatable, and the terminal further has:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display ; and

REPLACEMENT SHEET
23 JUN 1999

an updated specific display information stopping means which stops displaying the updated specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

13. An information display system as claimed in claim 12, wherein the updated specific information display stopping means stops displaying the updated specific display information by stopping a normal transmission of the specific display information from the display information provider to the terminal.

14. An information display system as claimed in claim 12, further comprising an updated specific display information stop releasing means for releasing the stop of the updated specific display information by the updated display information stopping means when the normal display state detecting means detects that the entire additional display information is in the normal display state within a prescribed length of time after the updated specific information display stopping means stops the display of the updated specific display information.

15. An information display system as claimed in claim 3, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display ; and

a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal display state detecting means

REPLACEMENT SHEET
23 JUL 1999

detects that the entire additional display information is not in the normal display state.

16. An information provider which receives a plurality of display information from a communication network and transfers said plurality of display information to a terminal having a display, comprising:

a connecting means which freely connects to and disconnects from said terminal over a communication line;

a request information receiving means for receiving via said communication line a request information which identifies a specific display information among said plurality of display information;

an additional information storing means for storing a plurality of additional display information;

an additional information selecting means for selecting an additional display information from the plurality of additional display information based on a prescribed condition;

an additional display information transmitting means for transmitting in parallel the specific display information and the additional display information selected by the additional information selecting means;

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display; and

a warning means for warning to the terminal when the normal display state detecting means has detected that the entire additional display information is not in the normal display state.

17. An information provider as claimed in claim 16, wherein

REPLACEMENT SHEET
23 JUL 1999

REPLACEMENT SHEET

the warning means has a warning displaying means for displaying a warning on the display.

18. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display ; and

an display information update delaying means which delays updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

19. An information provider as claimed in claim 18, wherein the display information update delaying means delays updating the specific display information by delaying a normal transmission of the specific display information from the display information provider to the terminal.

20. An information provider as claimed in claim 18, further comprising a display information update delay releasing means for releasing the specific display information update delay of the specific display information by the display information update delaying means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

21. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting

REPLACEMENT SHEET
23 JUL 1999

whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display ; and

a specific information display update stopping means which stops updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

22. An information provider as claimed in claim 21, wherein the specific display information update stopping means stops updating the specific information display by stopping a normal transmission of the specific display information from the display information provider to the terminal.

23. An information provider as claimed in claim 21, further comprising a specific display information update stop releasing means for releasing the specific display information update stop by the specific display information update stopping means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

24. An information provider as claimed in claim 16, further comprising:

a normal display state detecting means for detecting whether the entire additional display information is in a normal display state in which the entire additional display information is displayed inside the displayable range on the most front surface of the display ; and

a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal display state detecting means

REPLACEMENT SHEET
23 JUL 1999

detects that the entire additional display information is not in the normal display state.

25. An information provider as claimed in claim 24, wherein the terminal has a display memory for storing a content displayed on the display, and the normal display state detecting means detects whether the additional display information is displayed in the normal display state by detecting whether a content of the display memory displayed in a display region of the additional display information matches the additional display information transmitted from the information provider.

26. An information provider as claimed in claim 16, further comprising means for controlling said terminal to display the additional display information on the most front surface of the display.

27. An information provider as claimed in claim 16, further comprising:

a most front surface display state detecting means for detecting whether the entire additional display information is displayed on the most front surface of the display ; and

a warning means for issuing a warning to the terminal when the entire additional display information is not in the most front surface display state.

28. An information provider as claimed in claim 27, wherein the warning means has a warning displaying means for displaying the warning on the display.

29. An information provider as claimed in claim 27, further comprising a specific display information display delaying means which delays displaying the specific display

REPLACEMENT SHEET
23 JUL 1999

information when the most front surface display state detecting means detects that the entire additional display information is not in the most front surface display state.

30. An information provider as claimed in claim 27, further comprising a specific information display update stopping means which stops updating the specific display information when the most front surface display state detecting means detects that the entire additional display information is not displayed on the most front surface of the display.

31. An information provider as claimed in claim 27, further comprising a communication disconnecting means which disconnects a communication between the information provider and the terminal when the most front surface display state detecting means detects that the entire additional display information is not displayed on the most front surface of the display.

32. An information provider as claimed in claim 16, further comprising:

an additional display information display state judging means for judging whether the entire additional display information is displayed within a displayable range of the display ; and

means shifting the entire additional display information into the displayable range of the display when the additional display information display state judging means judges that the entire additional display information is not displayed within the displayable range of the display.

33. An information provider as claimed in claim 34, further comprising:

REPLACEMENT SHEET
23 JUL 1998

a normal additional display information display state detecting means for detecting whether the entire additional display information is displayed within the displayable range of the display ; and

a normal additional display information display state warning means for issuing a warning to the terminal when normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

34. An information provider as claimed in claim 33, wherein the normal additional display information display state warning means has a normal additional display information display state warning displaying means for displaying the normal additional display information display state warning.

35. An information provider as claimed in claim 33, further comprising a specific display information display delaying means which delays displaying the specific display information when the normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

36. An information provider as claimed in claim 33, further comprising a specific display information display update stopping means which stops updating the specific display information when the normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

37. An information provider as claimed in claim 35, further

REPLACEMENT SHEET
23 JUL 1999

comprising a communication disconnecting means which disconnects a communication between the information provider and the terminal when the normal additional display information display state detecting means detects that the entire additional display information is not displayed within the displayable range of the display.

38. An information provider as claimed in claim 16, further comprising a message database which holds the plurality of additional display information together with display conditions of each additional display information, wherein the additional information selecting means selects the additional display information from the plurality of additional display information in accordance with the display conditions held in the message database.

39. An information provider as claimed in claim 38, wherein the display conditions include type specific information of a user for displaying each of the additional display information, the information provider further comprising a user database which holds type specific information of a user of the terminal, the additional information selecting means further having:

a type specific information readout means for reading out the type specific information of each user from the user database; and

a type specific additional display information selecting means which selects the additional display information matching the display condition from the message database, using the type specific information that the type specific information readout means reads out from the user database.

40. An information provider as claimed in claim 41, wherein

REPLACEMENT SHEET
23 JUL 1999

the type specific information on the user includes at least one of the age, gender, marital history, profession, and address of the user.

41. An information provider as claimed in claim 38, wherein each of the display conditions includes a display count upper limit for each user of the terminal, the information provider further comprising:

a transmission count counting means for counting a transmission count of each additional display information to the terminal for each user of the terminal; and

a transmission prohibiting means which prohibits a transmission of the additional display information to the terminal after the transmission count reaches the display count upper limit.

42. An information provider as claimed in claim 41, wherein the display count upper limit is a display count upper limit within a prescribed time interval.

43. An information provider as claimed in claim 38, wherein the display condition includes a display count total upper limit for each additional display information, the information provider further comprising:

a transmission count counting means for counting a transmission count of each additional display information to the terminal; and

a transmission prohibiting means which prohibits a transmission of the additional display information to the terminal after the transmission count reaches the display count total upper limit.

44. An information provider as claimed in claim 43, wherein

REPLACEMENT SHEET
23 JUL 1999

the display count total upper limit is a display count total upper limit within a prescribed time interval.

45. An information provider as claimed in claim 38, wherein the display condition includes request display time of each additional display information, the information provider further comprising an additional display information transmitting means which transmits the additional display information to the terminal when current time reaches the request display time.

46. An information provider as claimed in claim 16, wherein the information provider is connected to an internet and the terminal has an internet information requesting means which requests an information as the specific display information on the internet, the information provider further comprising an internet information transmitting means which selects an information on the internet and transmits the information to the terminal in response to a request from the terminal.

47. An information provider as claimed in claim 46, wherein the information provider sequentially transmits the additional display information, and periodically updates the additional display information on the display.

48. An information provider as claimed in claim 47, further comprising an advertisement information transmitting means which transmits an advertisement information on a commercial product or service as the additional display information to the terminal.

49. A recording medium which stores a program for operating a terminal having a display and a communication line

REPLACEMENT SHEET
23 JUL 1999

connecting means for freely connecting to and disconnecting from a communication line, said program comprising:

a communication line connecting means which causes the terminal to connect to an information provider that is capable of providing a plurality of display information that the information provider receives from a communication network via the communication line;

a request transmitting means for transmitting a request which causes the terminal to show the display information that a user of the terminal designates;

means for causing the terminal to receive from the information provider a specific display information that the request specifies and selects from the plurality of display information;

an additional display information receiving means which causes the terminal to receive an additional display information in parallel with the specific display information not designated by the user, from the information provider using the communication line;

an information displaying means which causes the terminal to display the specific display information and the additional display information onto different display regions on the display, respectively;

an information display judging means which causes the terminal to judge whether the entire additional display information is displayed within a displayable range of the display; and

means for causing the terminal to shift the entire additional display information into the displayable range of the display when the information display judging means judges that the entire additional display information is not displayed within the displayable range of the display.

50. A recording medium as claimed in claim 49, wherein the

REPLACEMENT SHEET

23 JUL 1999

program further comprises:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display ; and

a warning means which causes the terminal to issue a warning to the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

51. A recording medium as claimed in claim 50, wherein the warning means includes a warning displaying means which causes the terminal to display a warning on the display.

52. A recording medium as claimed in claim 49, wherein the program further comprises:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display ; and

a specific display information update delaying means which causes the terminal to delay updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

53. A recording medium as claimed in claim 52, wherein the specific display information update delaying means causes the terminal to delay updating the specific display information

REPLACEMENT SHEET
23 JUL 1999

REPLACEMENT SHEET

by delaying a normal transmission of the specific display information from the information provider to the terminal.

54. A recording medium as claimed in claim 52, wherein the program further comprises a specific display information update delay releasing means which causes the terminal to release the delay of the specific display information update by the specific display information update delaying means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

55. A recording medium as claimed in claim 49, wherein the program further comprises:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display ; and

a specific display information update stopping means which causes the terminal to stop updating the specific display information when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

56. A recording medium as claimed in claim 55, wherein the specific display information update stopping means causes the terminal to stop updating the specific display information by stopping a normal transmission of the specific display information from the information provider to the terminal.

57. A recording medium as claimed in claim 58, wherein the

REPLACEMENT SHEET
23 JUIL 1999

REPLACEMENT SHEET

program further comprises a specific display information update stop releasing means which causes the terminal to release the stop of the specific display information update by the normal display state detecting means when the normal display state detecting means detects that the entire additional display information is in the normal display state.

58. A recording medium as claimed in claim 49, wherein the program further comprises:

a normal display state detecting means which causes the terminal to detect whether the entire additional display information is in a normal display state in which the entire additional display information is displayed within the displayable region and on the most front surface of the display ; and

a communication disconnecting means which causes the terminal to disconnect a communication between the information provider and the terminal when the normal display state detecting means detects that the entire additional display information is not in the normal display state.

59. A recording medium as claimed in claim 58, wherein the terminal has a display memory for storing a display content of the display, and the normal display state detecting means detects whether the additional display information is displayed by detecting whether the content of additional display information stored in the display memory displayed on the display region matches the additional display information transmitted from the information provider.

60. A terminal which freely connects to and disconnects from an information provider having a function which transfers a plurality of display information that the

REPLACEMENT SHEET
23 JUL 1999

REPLACEMENT SHEET

information provider receives from a communication network via a communication line, comprising:

means for transmitting a request information for identifying a specific display information, which is directly designated by a user of the terminal, from the plurality of display information to the information provider via the communication line;

a first specific display information receiving means which receives the specific information transmitted from the information provider based on the request information;

a second specific display information receiving means which receives an additional display information that is selected from a plurality of additional display information not transferred from the communication network without requiring a designation by a user of the terminal;

a display for displaying information;

an information displaying means which displays the specific display information the first specific display information receiving means receives and the additional display information the second specific display information receiving means receive onto first and second display regions on the display, respectively;

an information display judging means which judges whether the entire additional display information is displayed within a displayable range of the display ; and

means for shifting the entire additional display information into the displayable range of the display when the information display judging means judges that the entire additional display information is not displayed within the displayable range of the display.

REPLACEMENT SHEET
23 JUL 1999