

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)


PCT

(10) International Publication Number
WO 2004/035228 A2

- (51) International Patent Classification⁷: **B05C**
- (21) International Application Number:
PCT/JP2003/012028
- (22) International Filing Date:
19 September 2003 (19.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002-300097 15 October 2002 (15.10.2002) JP
2003-088448 27 March 2003 (27.03.2003) JP
2003-088449 27 March 2003 (27.03.2003) JP
- (71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).
- (72) Inventors: **SASAGURI, Shinji**; 5-2-5-501, Befu, Jonan-ku, Fukuoka-shi, Fukuoka, 814-0104 (JP). **OZONO, Mitsuru**; 1-19-5, Hikarigaoka, Chikushino-shi, Fukuoka 818-0036 (JP).
- (74) Agents: **OGURI, Shohei** et al.; Eikoh Patent Office, 28th Floor, ARK Mori Building, 12-32, Akasaka 1-chome, Minato-ku, Tokyo 107-6028 (JP).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: PASTE EJECTION APPARATUS

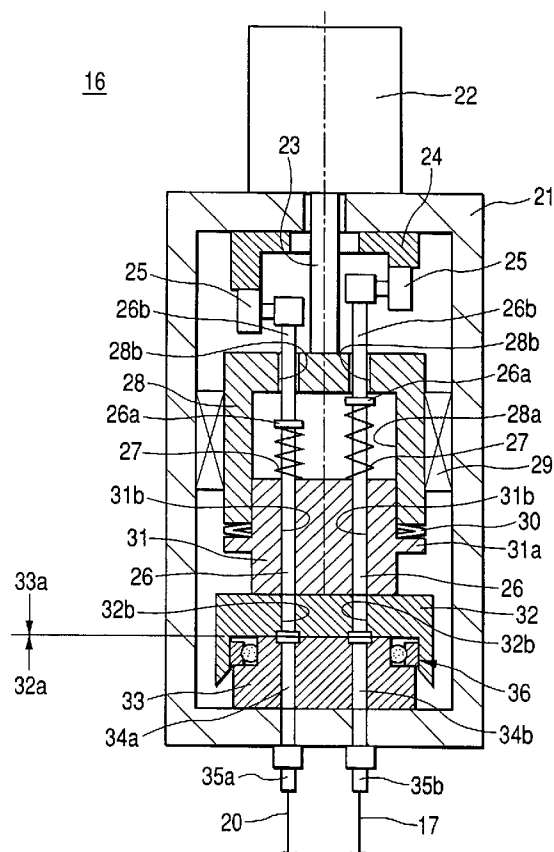

(57) Abstract: In a seal mechanism which constitutes a port switching portion in a pump mechanism of a paste ejection apparatus that ejects paste, and which prevents leakage of the paste from a seal portion between a plunger block rotating with a plunger and a fixed seal block (between a seal surface and a sliding surface), a housing portion is formed by opposing an outer surface provided for the seal block to an inner surface extending axially from the cylinder block, and a ring-shaped external seal member formed by combination of an O-ring and self-lubricant material such as PTFE is attached into the housing portion. Hereby, it is possible to prevent the paste that has leaked from the seal portion from leaking to the outside of the housing portion by the external seal member.



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*