

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2008 (06.11.2008)

PCT

(10) International Publication Number
WO 2008/132272 A3

(51) International Patent Classification:

E05B 47/06 (2006.01) *E05B 47/00* (2006.01)
E05B 15/10 (2006.01)

(74) Agent: AWEK INDUSTRIAL PATENTS LTD OY;
P.O.Box 230 (Lautatarhankatu 6), FI-00101 Helsinki (FI).

(21) International Application Number:

PCT/FI2008/050170

(22) International Filing Date: 9 April 2008 (09.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

20075295 27 April 2007 (27.04.2007) FI

(71) Applicant (for all designated States except US): ABLOY OY; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HELISTEN, Mika
[FI/FI]; Ratapolku 4 B 10, FI-80400 Ylämylly (FI).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: DOOR LOCK

FIG. 1

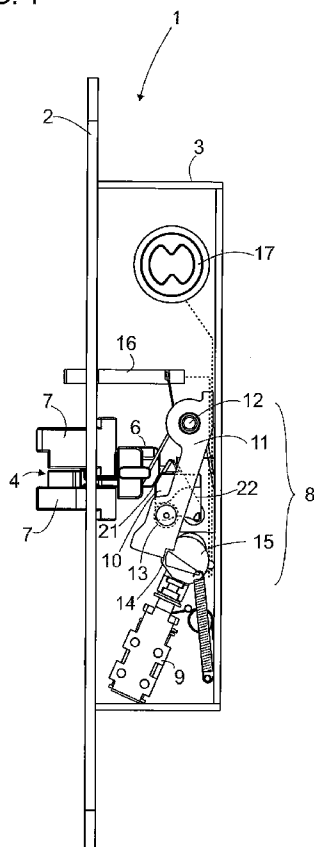

(57) Abstract: A door lock comprising a lock body (3) fitted with a front plate and a dual-action bolt (4). The transfer of external force to the locking piece (5) in the lock body is reduced. The reduction of external force is arranged in two stages of transmission. At the first stage of transmission, the transmitted force is reduced using a wedge part (10) that is in force transmission contact with a lever (11). The second stage of transmission constitutes the lever.



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

(88) Date of publication of the international search report:

18 December 2008