



(51) International Patent Classification:

H04N 13/00 (2006.01) G02B 27/22 (2006.01)

(21) International Application Number:

PCT/US2013/035843

(22) International Filing Date:

9 April 2013 (09.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: BITANIMATE, INC. [US/US]; 5 Centerpointe Drive, Suite 400, Lake Oswego, OR 97035 (US).

(72) Inventors: MALEKI, Behrooz, A.; 5 Centerpointe Drive, Suite 400, Lake Oswego, OR 97035 (US). SARKHOSH, Sarvenaz; 5 Centerpointe Drive, Suite 400, Lake Oswego, OR 97035 (US).

(74) Agents: ISRAELSEN, R., Burns et al.; MASCHOFF BRENNAN, 1389 Center Drive, Suite 300, Park City, UT 84098 (US).

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: TWO-DIMENSIONAL VIDEO TO THREE-DIMENSIONAL VIDEO CONVERSION METHOD AND SYSTEM

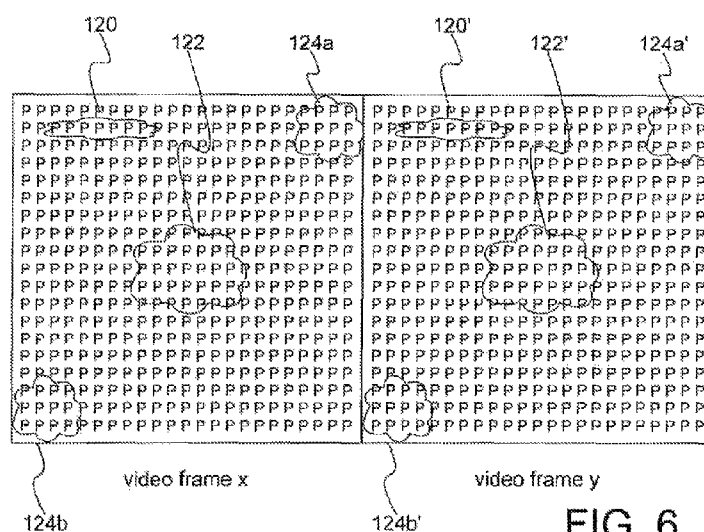


FIG. 6

(57) Abstract: A method for converting two-dimensional video to three-dimensional video. The method includes the steps of comparing at least part of video frame x to a corresponding at least part of video frame y to determine movement therebetween, calculating a movement direction and movement extent based on the determined movement, determining viewing frame L and viewing frame R based on the movement direction, and modifying viewing frame R based on the movement direction and the movement extent to create modified viewing frame R'. One alternative embodiment is a video display device for converting two-dimensional video to three-dimensional video. Another alternative embodiment includes one or more device-readable media storing executable instructions that, when executed, configure a video display device to convert two-dimensional video to three-dimensional video.