



(51) International Patent Classification:
H04L 12/24 (2006.01)

(21) International Application Number:
PCT/US2008/013693

(22) International Filing Date:
12 December 2008 (12.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/003,051 19 December 2007 (19.12.2007) US

(71) Applicant (for all designated States except US): **SO-LARWINDS WORLDWIDE LLC** [US/US]; 3711 South Mopac Expressway, Building 2, Austin, TX 78746 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DANNER, Tim** [US/US]; 1301 South Mopac Expressway, Austin, TX 78746 (US).

(74) Agents: **GOLDHUSH, Douglas, H.** et al.; Squire, Sanders & Dempsey L.L.P., 8000 Towers Crescent Drive, 14th Floor, Tysons Corner, VA 22182 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: INTERNET PROTOCOL SERVICE LEVEL AGREEMENT ROUTER AUTO-CONFIGURATION

FIGURE 1A

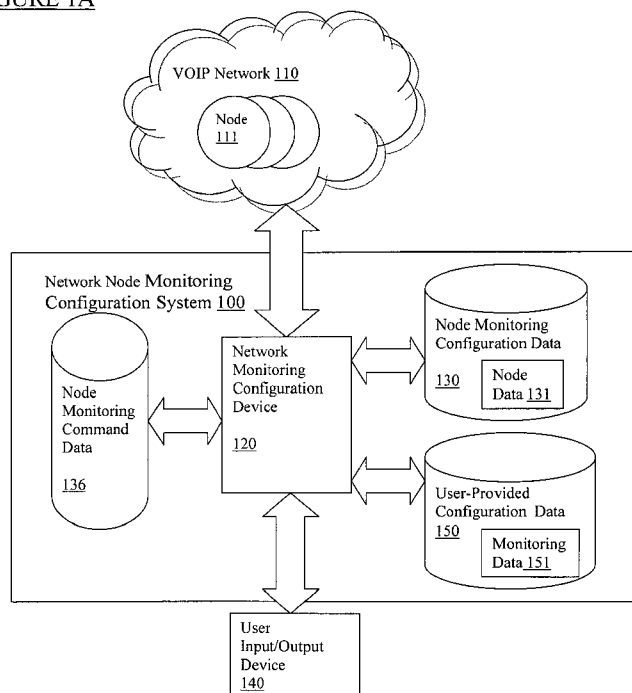

(57) Abstract: Once the user has configured which call paths to monitor, VOIP automatically creates all the required IP SLA operations, including turning on the responder on the destination side. When these operations disappear, either due to their periodic expiration or due to a router reset, so the service dynamically recreates the IP SLA operations as necessary.

**Published:****(88) Date of publication of the international search report:**

20 August 2009

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*