

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 July 2002 (11.07.2002)

PCT

(10) International Publication Number
WO 02/054776 A1

(51) International Patent Classification⁷: **H04N 7/26, 7/58**

(21) International Application Number: PCT/FI02/00004

(22) International Filing Date: 3 January 2002 (03.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/259,529	3 January 2001 (03.01.2001)	US
09/827,796	6 April 2001 (06.04.2001)	US
09/883,887	18 June 2001 (18.06.2001)	US
09/925,769	9 August 2001 (09.08.2001)	US

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KARCZEWICZ, Marta** [PL/US]; 1224 Hidden Ridge, #3097, Irving, TX 75038 (US). **KURCEREN, Ragip** [TR/US]; 7914 N. MacArthur Blvd., Apt. 2043, Irving, TX 75063 (US).

(74) Agent: **TAMPEREEN PATENTTITOIMISTO OY**; Hermiankatu 6, FIN-33720 Tampere (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: SWITCHING BETWEEN BIT-STREAMS IN VIDEO TRANSMISSION

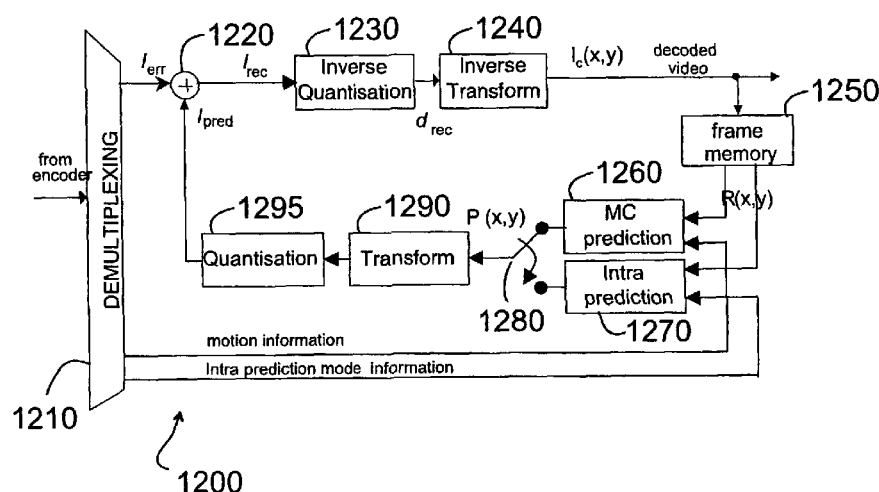

(57) Abstract: The invention relates to a method for transmitting video information, in which at least a first bit-stream (510) and a second bit-stream are formed. The first bit-stream (510) comprises at least one video frame, and the second bit-stream (520) comprises at least one predictive video frame (524). At least partly different encoding parameters are used with encoding of the frames of said first bit-stream (510) and said second bit-stream (520). At least one frame of said first bit-stream (510) is being transmitted, and the transmission is switched over from said first (510) to said second bit-stream (520). In switching the transmission over from said first (510) to said second bit-stream (520), a secondary switching frame (550) is transmitted, which have been encoded using the encoding parameters of the second bit-stream (520) and at least one reference frame from the first bit-stream (510). Said secondary switching frame (550) is used as a reference frame in the reconstruction of said at least one predictive video frame (524) of the second set of video frames. The invention also relates to an encoder for encoding video information, a decoder for decoding a video information, and a signal representing encoded video information.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*