



(51) International Patent Classification:

A47D 15/00 (2006.01) A47D 1/00 (2006.01)
A47C 3/20 (2006.01)

(21) International Application Number:

PCT/NO2009/000121

(22) International Filing Date:

31 March 2009 (31.03.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20081658 3 April 2008 (03.04.2008) NO

(71) Applicant (for all designated States except US): **PETER OPSVIK AS** [NO/NO]; Pilestredet 27 H, NO-0164 Oslo (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **OPSVIK, Peter** [NO/NO]; Pilestredet 27 H, NO-0125 Oslo (NO).

(74) Agent: **Zacco Norway AS**; P.O. Box 2003 Vika, NO-0125 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FASTENING DEVICE FOR A CHAIR

Fig. 1

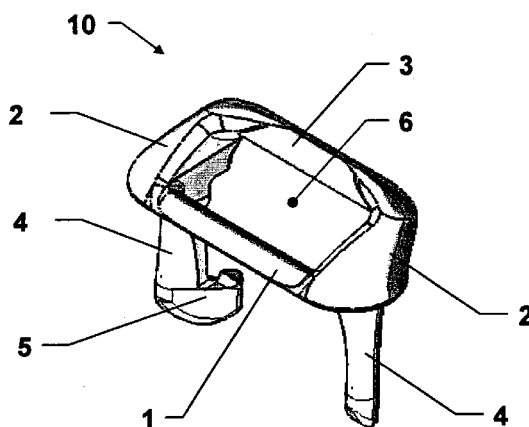

(57) Abstract: The present invention concerns a fastening device for use in a children's chair (40) with a seat plate (41), wherein the seat plate has a vertical through hole, characterized in that a cross piece (1) connected to two side pieces (2) which are joined by a cross bar (3) and defining an opening (6), wherein the cross bar (3) is positioned in a vertical distance from the cross piece (1) when the fastening device is mounted; two mainly vertical lining elements (4) to be inserted into the hole, connected to the underside of the cross piece (1) and/or side pieces (2) in their upper ends, wherein the lining elements (4) each comprise at least one locking hook 5 in their lower ends which have a larger horizontal extent than the lining elements.