



- (51) **International Patent Classification:**
B65G 15/60 (2006.01) *B65G 21/02* (2006.01)
- (21) **International Application Number:**
PCT/EP2013/050989
- (22) **International Filing Date:**
18 January 2013 (18.01.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
0094/12 23 January 2012 (23.01.2012) CH
- (71) **Applicant:** MIKRON SA [CH/CH]; Route du Vignoble 17, CH-2017 Boudry (CH).
- (72) **Inventors:** GUTIERREZ, José-Andrés; F.-C. de Marval 1, CH-2000 Neuchâtel (CH). THIEBAUD, Serge; Chemin des Sources 18, CH-2013 Colombier (CH). NEUMANN, Olivier; Rue des Poudrières 31, CH-2000 Neuchâtel (CH). AUTHIER, Jean-Charles; Rue de la Côte 42, CH-2000 Neuchâtel (CH).
- (74) **Agent:** P&TS SA; Av. J.-J. Rousseau 4, P.O. Box 2848, CH-2001 Neuchâtel (CH).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

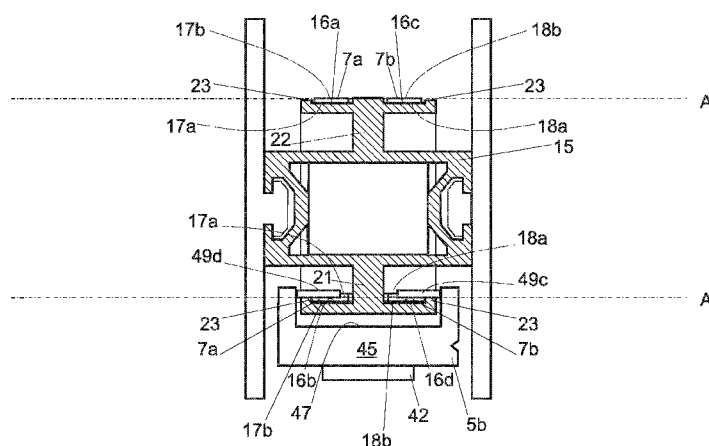
(54) **Title:** A CONVEYOR

Fig. 2

(57) **Abstract:** A conveyor (3) comprising, a first belt (7a) which is configured to move in a closed loop (19); a support element (15) which comprises first surface (16a) which is configured to cooperate with a first surface (17a) of the first belt (7a) to support the first belt (7a) during an outgoing part of the closed loop (19) and a second surface (16b) which is configured to cooperate with a second surface (17b) of the first belt (7a) to support the first belt (7a) during a return part of the closed loop (19), so that the first belt (7a) is prevented from hanging; a second belt (7b) which is configured to move in a closed loop (19), and the support element (15) comprises a third surface (16c) which is configured to cooperate with a first surface (18a) of the second belt (7b) to support the second belt (7b) during an outgoing part of the closed loop (19) and a fourth surface (16d) which cooperates with a second surface (18b) of the second belt (7b) to support the second belt (7b) during a return part of the closed loop (19), so that the second belt (7b) is prevented from hanging; wherein the support element (15) comprises a member which has an inverted T-shaped cross-section, which defines the second and fourth surfaces (18b, 16d). There is further provided a puck (5a-c) which can cooperate with the conveyor (3); and a conveyor assembly which comprises the conveyor (3) and one or more pucks (5a-c).