

(51) International Patent Classification:
G03G 15/08 (2006.01)

(21) International Application Number:

PCT/JP2011/078626

(22) International Filing Date:

2 December 2011 (02.12.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010-270370 3 December 2010 (03.12.2010) JP
2011-197303 9 September 2011 (09.09.2011) JP
(71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MATSUMOTO, Junichi** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP). **KAI, Tsukuru** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP). **HOSOKAWA, Hiroshi** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP). **KOMATSU, Makoto** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP). **HAYAKAWA, Tadashi** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-

chome, Ohta-ku, Tokyo, 1438555 (JP). **OZAWA, Yuzuru** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).
(74) Agent: **NISHIWAKI, Tamio**; Asahi Bldg. 7F, 6-7, Ginza 6-chome, Chuo-ku, Tokyo, 1040061 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: POWDER CONTAINER, POWDER SUPPLY DEVICE AND IMAGE FORMING APPARATUS

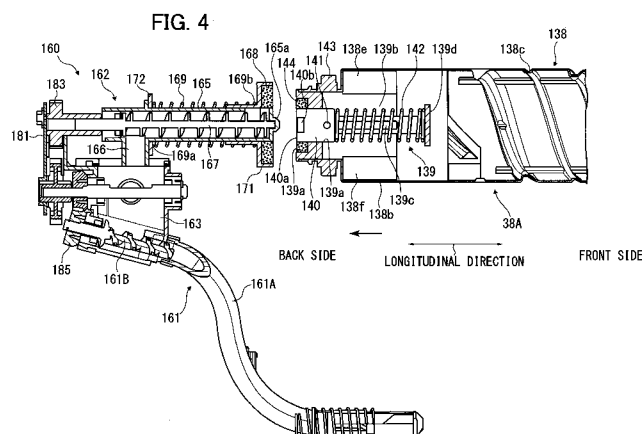

(57) Abstract: Provided is a powder container having a new structure capable of stable discharge and transport of a powder contained in a container by enabling the powder to be reliably discharged to the outside of the package while preventing the powder from spilling and flying out of the container. The powder container has a container body 138 for transporting powder contained therein from a first end side 138a to a second end side 138b thereof by self-rotating; a nozzle receiver 139 having a nozzle receiving hole (insertion section) 139a arranged inside the second end side of the container body and configured to allow a transport nozzle 162 having a powder receiving inlet 170 to be inserted therein, and a supply port 139b arranged in at least a part of the nozzle receiver 139 and configured to supply the powder in the container body 138 to the powder receiving inlet 170; and a shutter 140 supported by the nozzle receiver 139 and configured to open and close the nozzle receiving hole (insertion section) 139a by sliding in response to insertion of the transport nozzle 162 into the nozzle receiver 139.