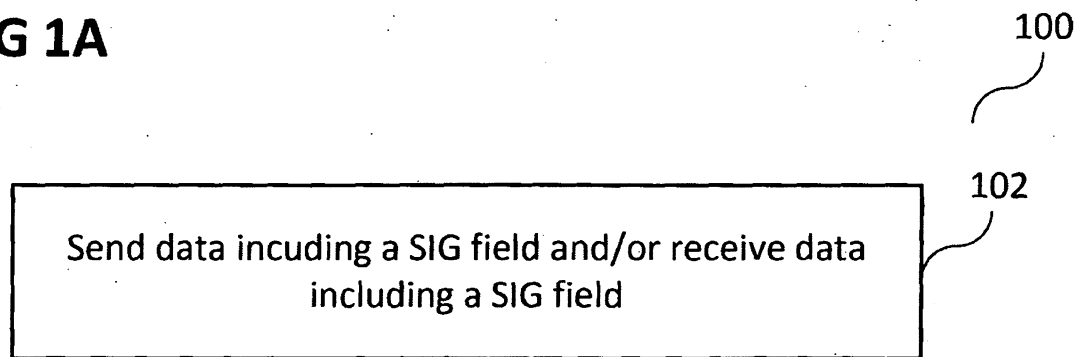
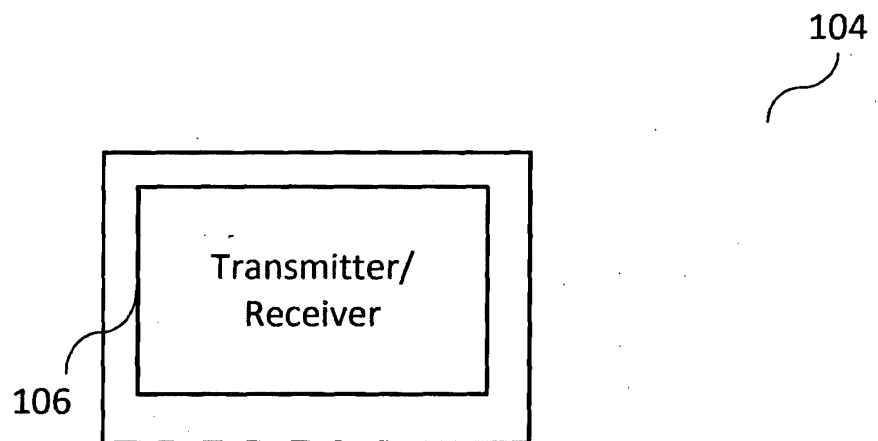
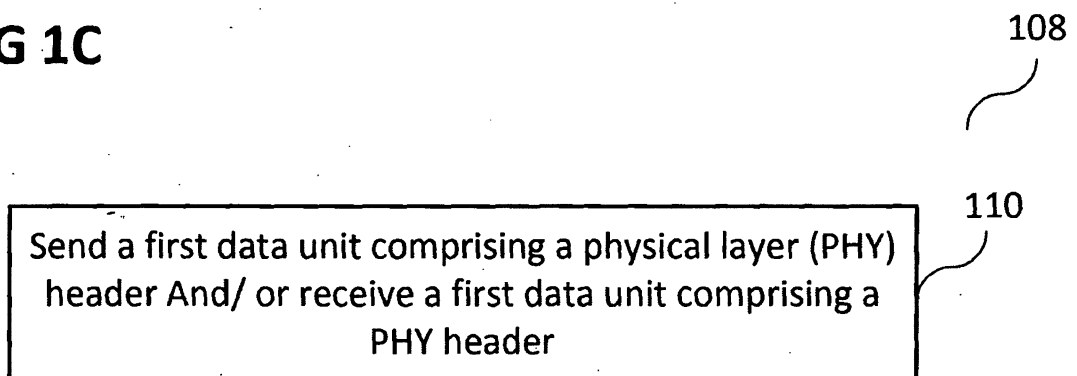


1/11

FIG 1A**FIG 1B****FIG 1C**

2/11

FIG 2


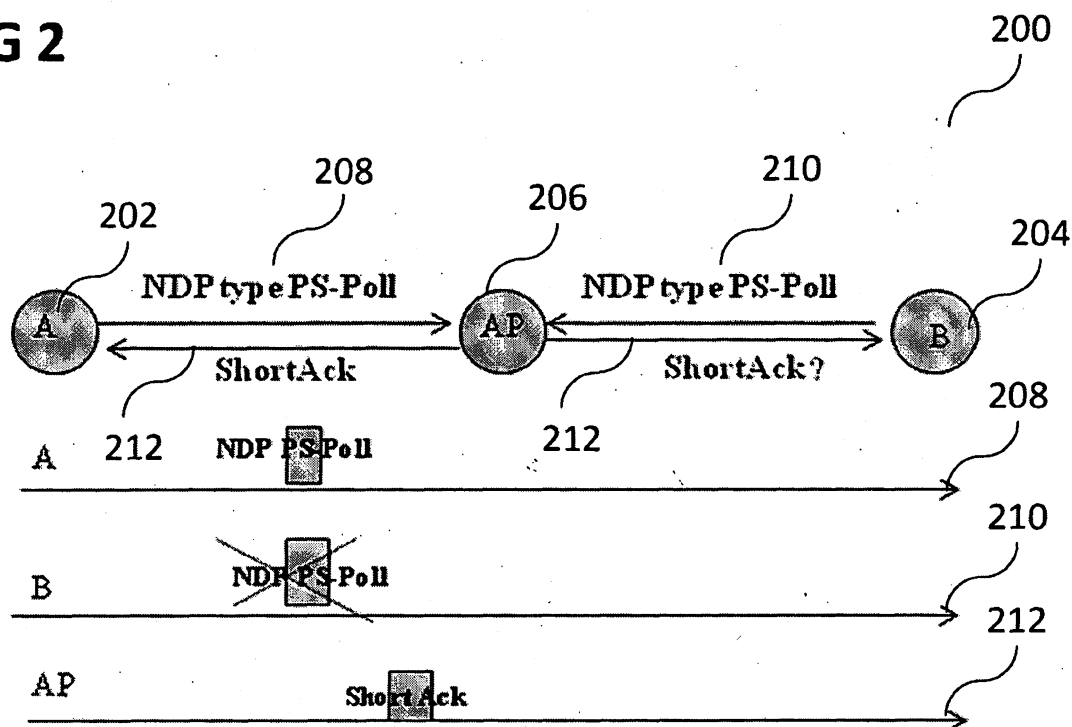


FIG 3

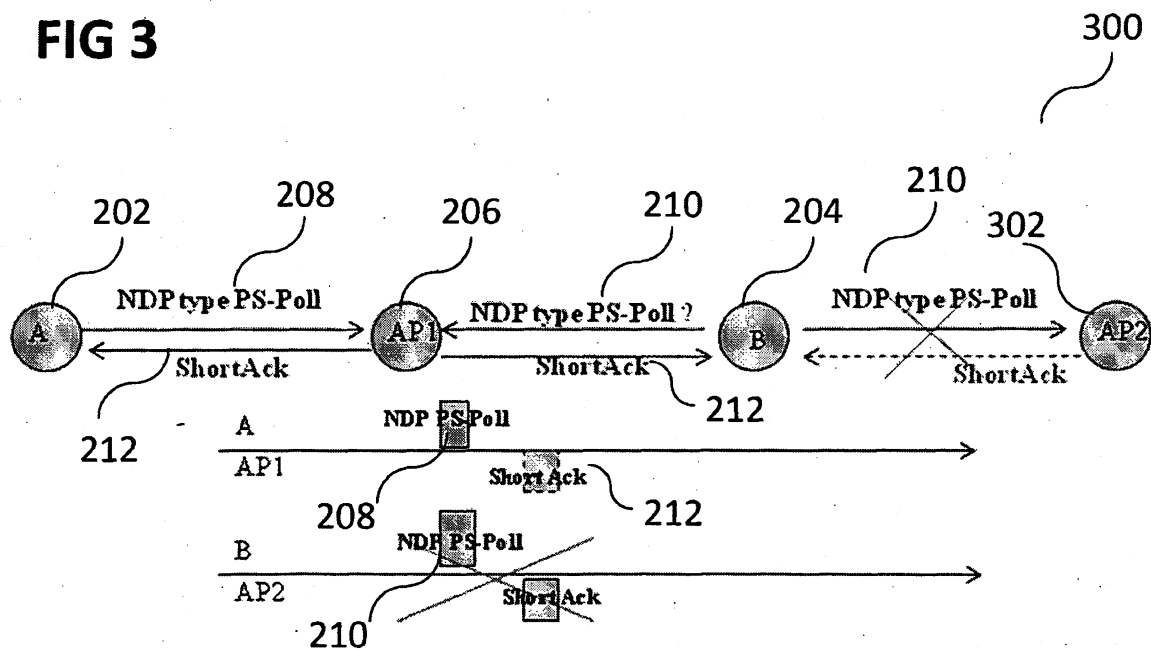

3/11

FIG 4


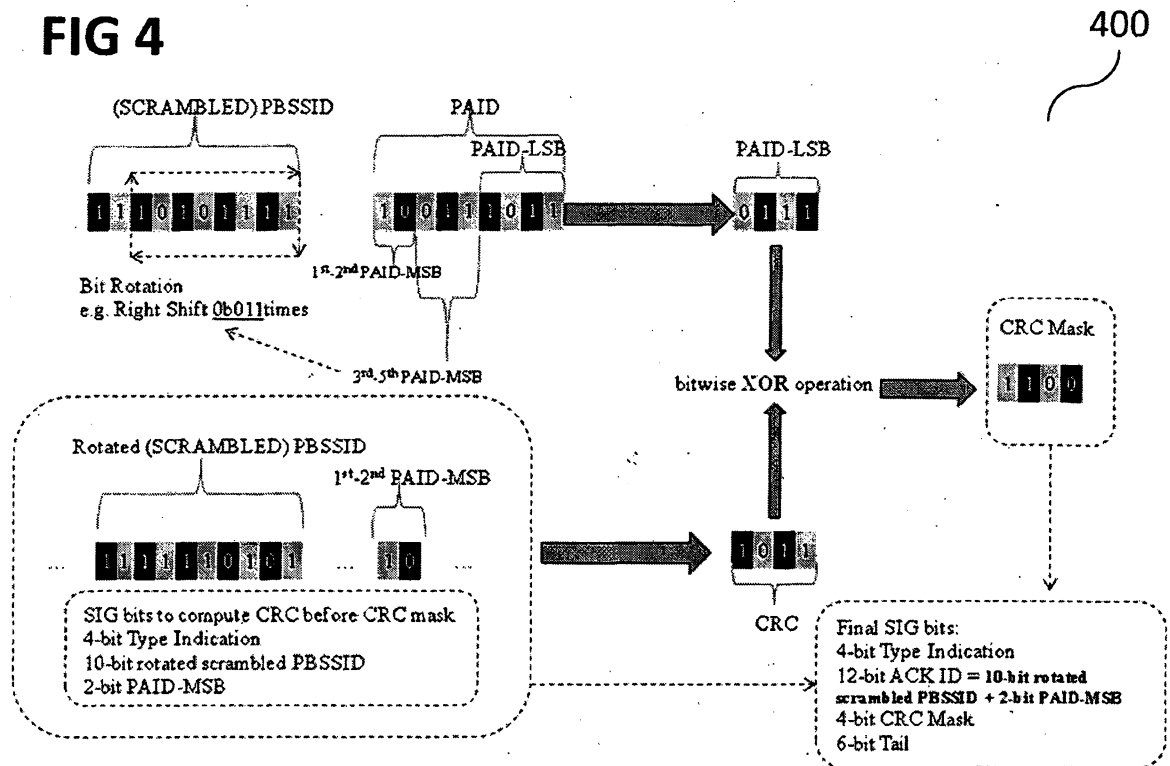


FIG 5

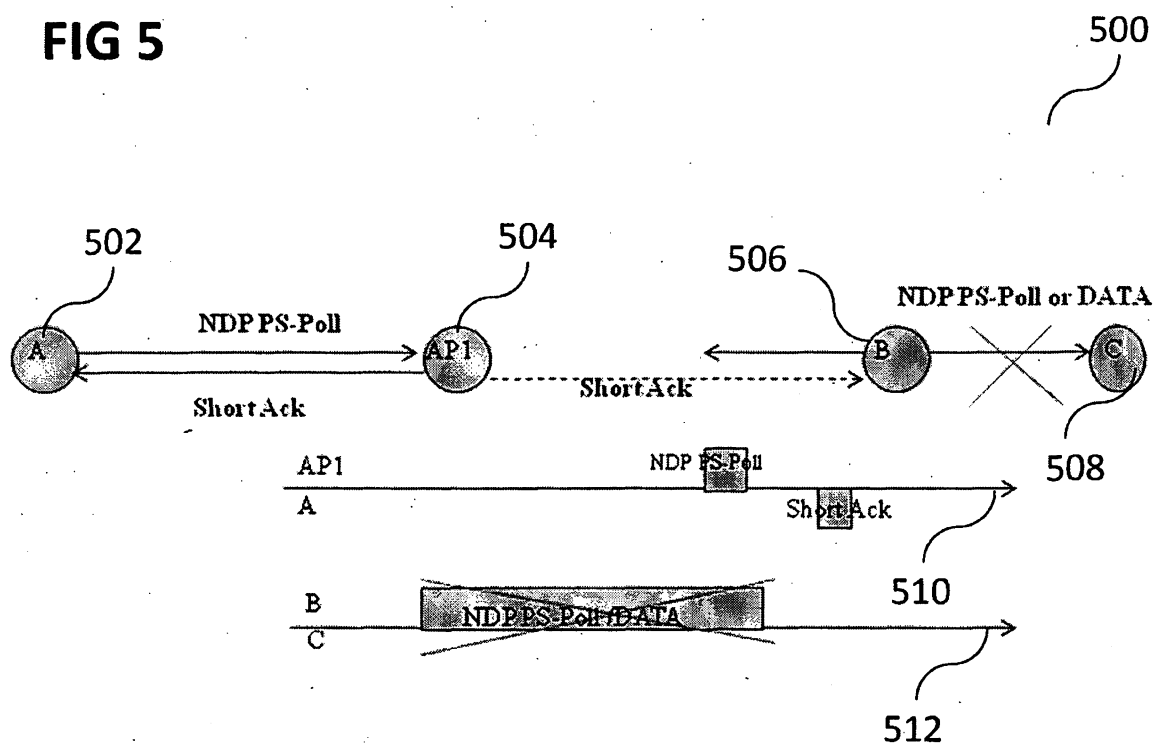

4/11

FIG 6

600




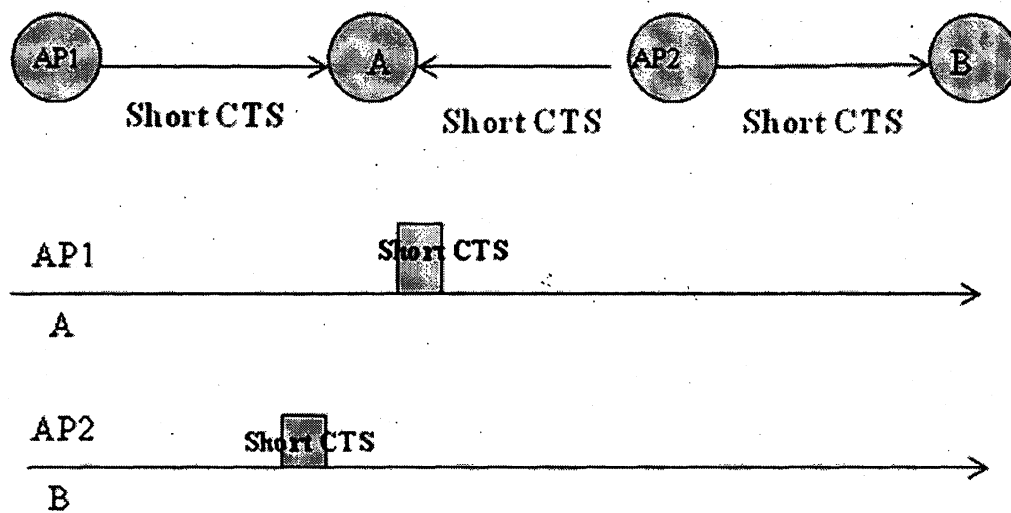


FIG 7

700

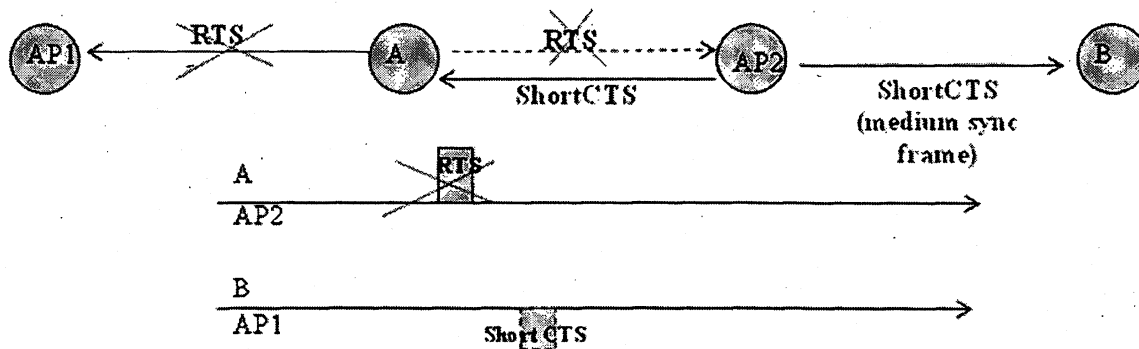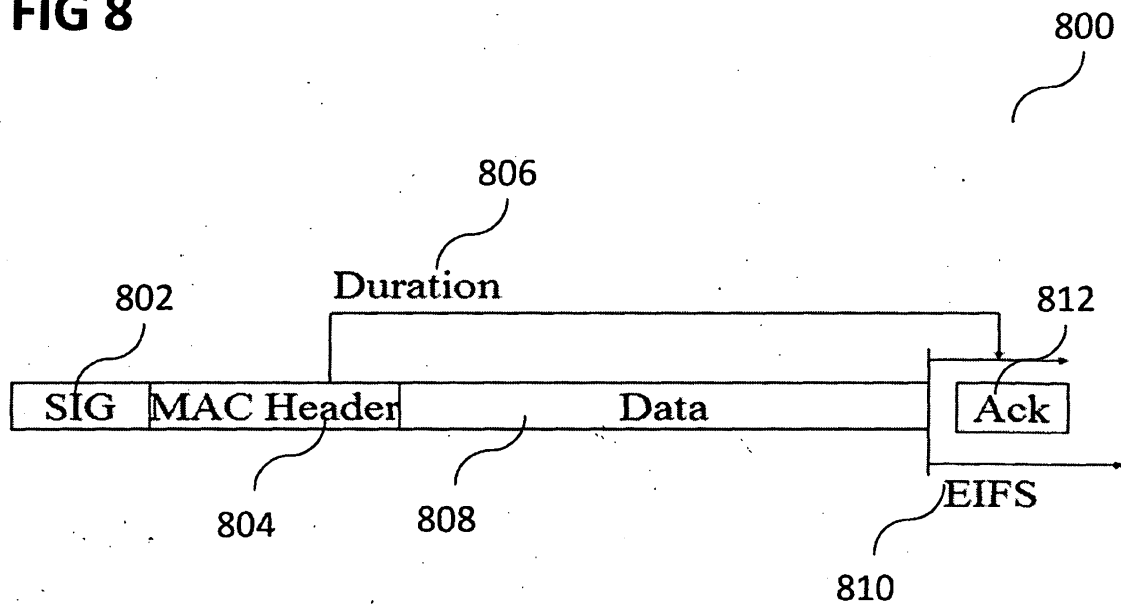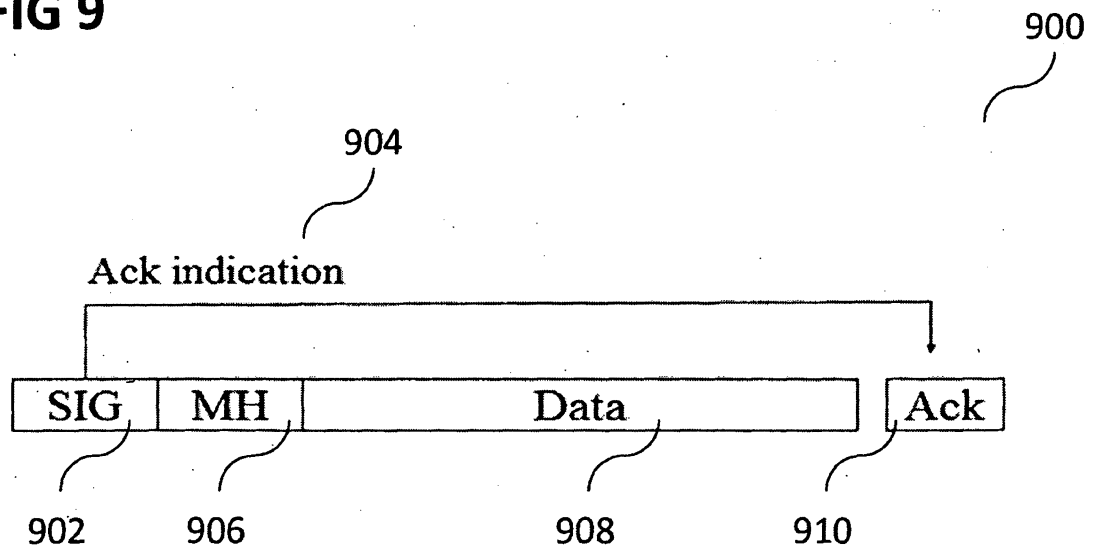

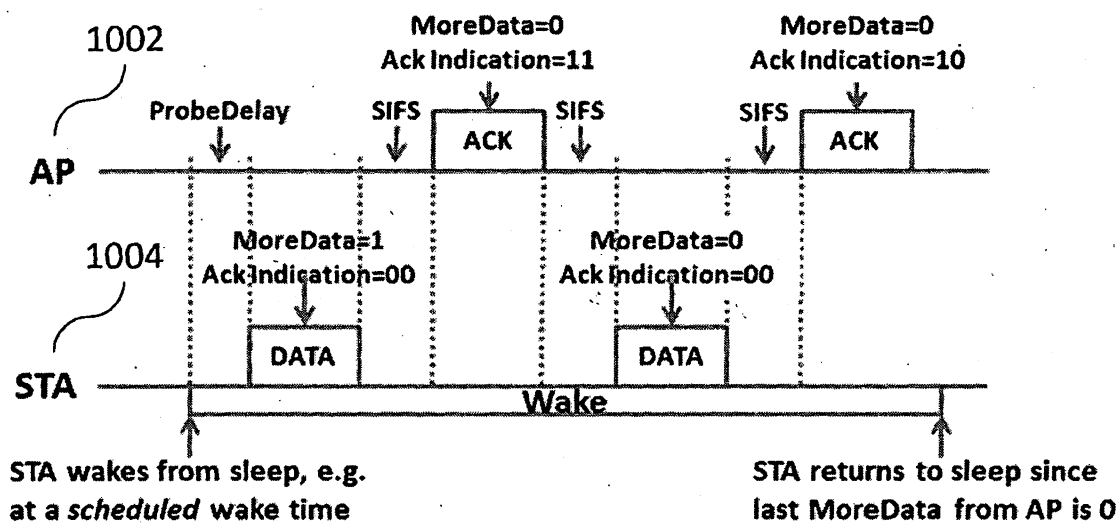
5/11

FIG 8**FIG 9**


6/11

FIG 10

STA, with buffered uplink (UL) traffic, starts transmission with UL DATA instead of PS-POLL.

**FIG 11**

STA, with buffered uplink (UL) traffic, starts transmission with UL DATA instead of PS-POLL.

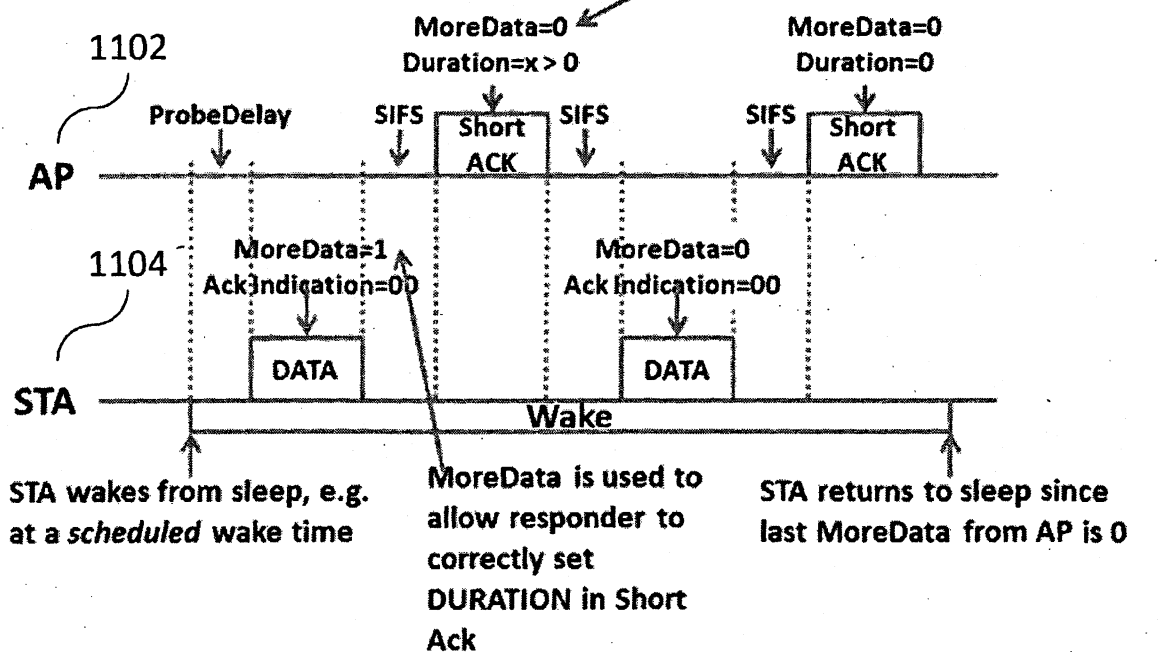

7/11

FIG 12

1200

AP sends downlink DATA frame with Ack Indication bits set to 00 to relay


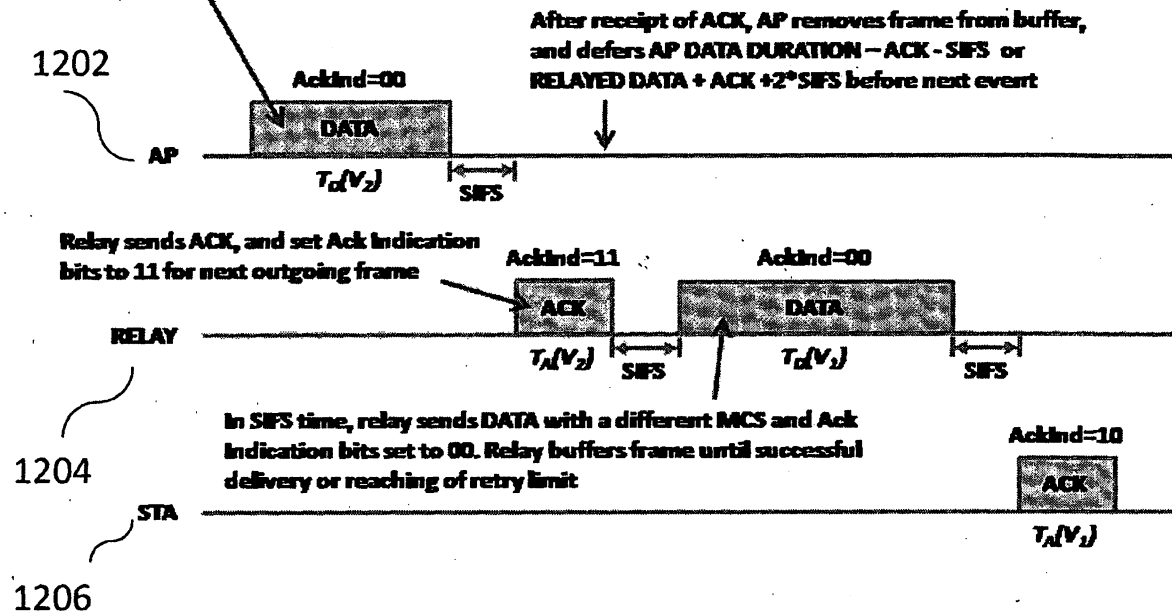


FIG 13

1300

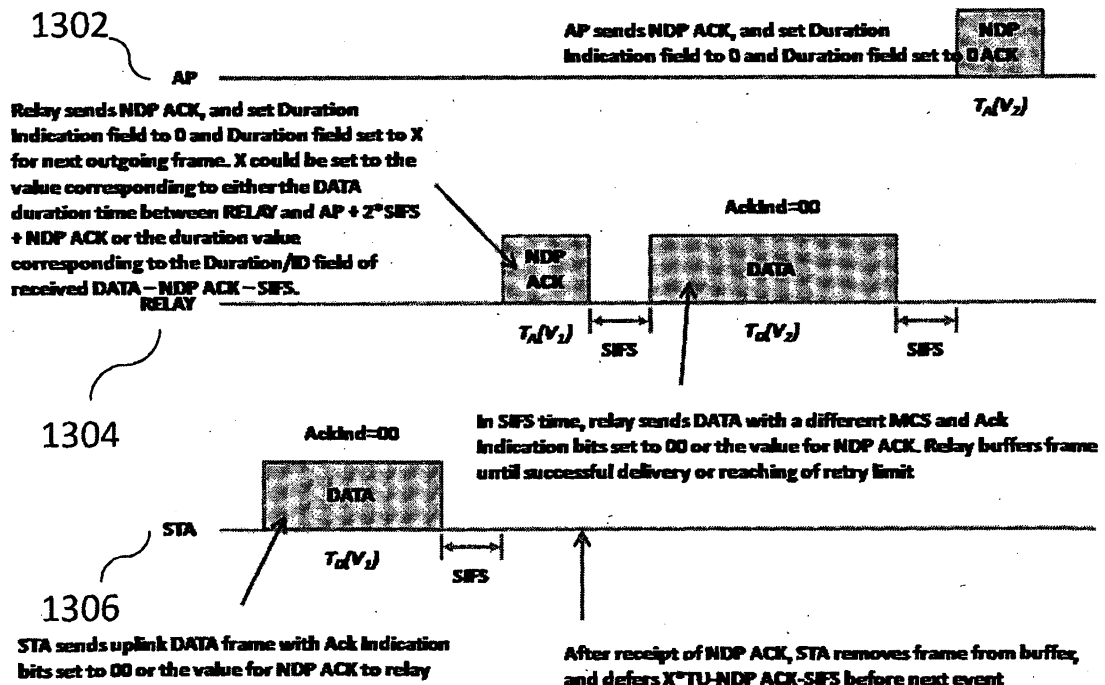

8/11

FIG 14


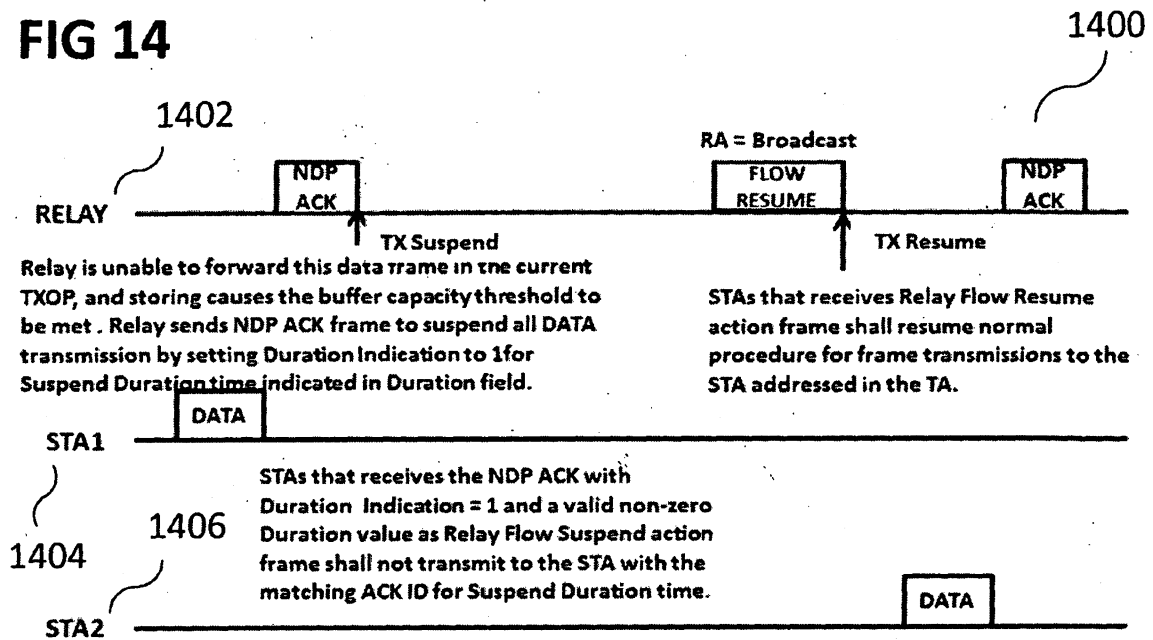


FIG 15

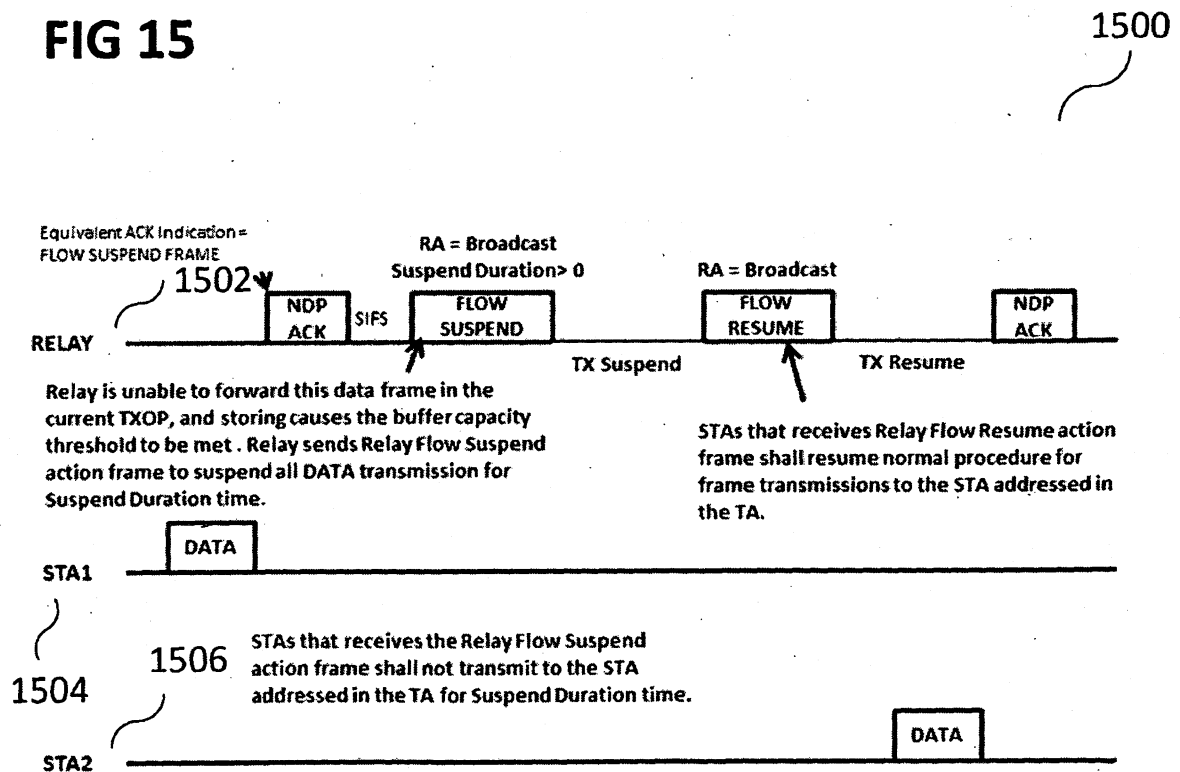

9/11

FIG 16

1600


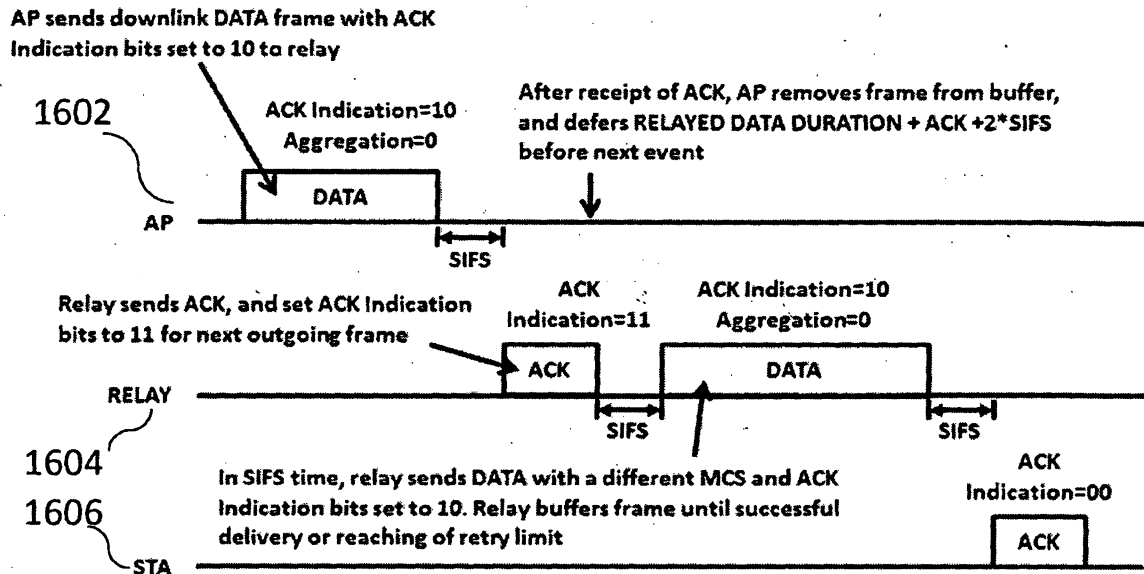


FIG 17

1700

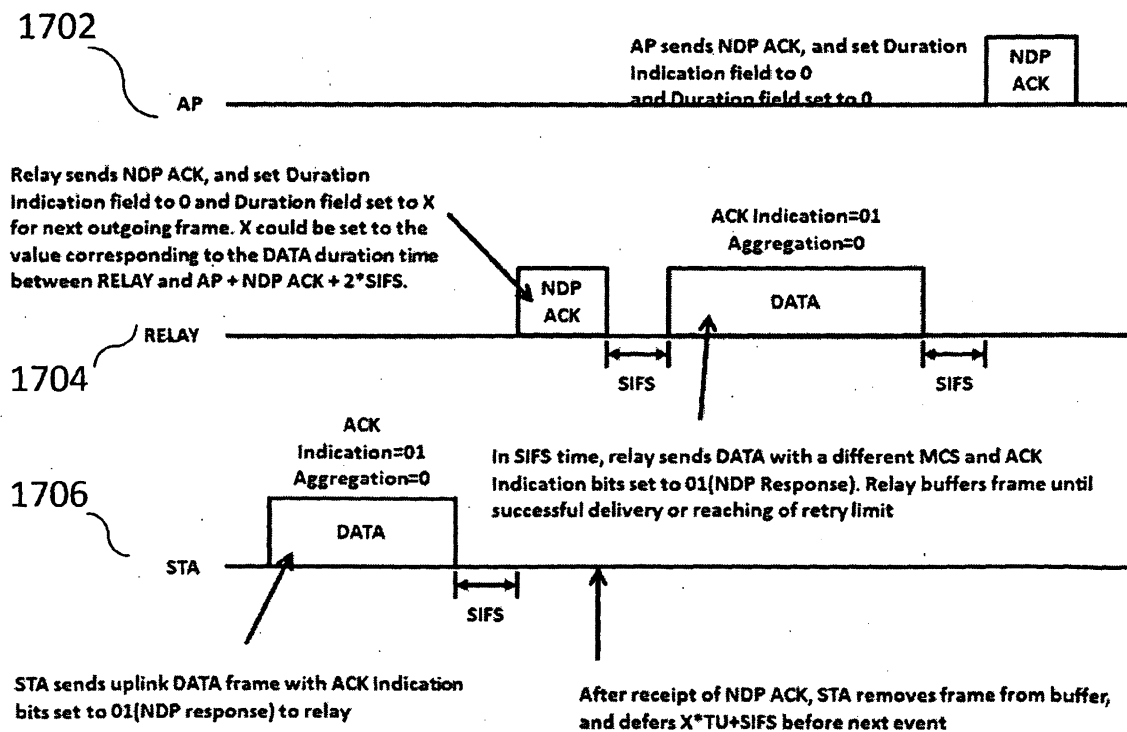

10/11

FIG 18


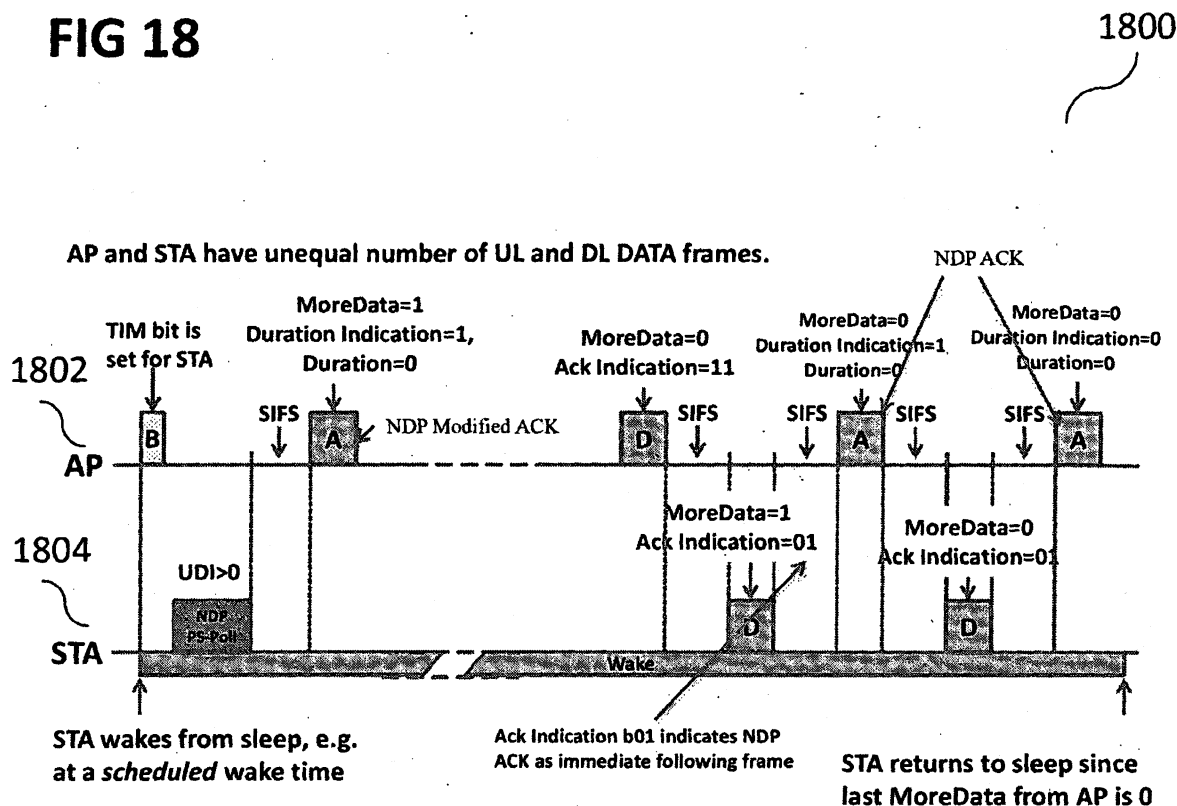


FIG 19

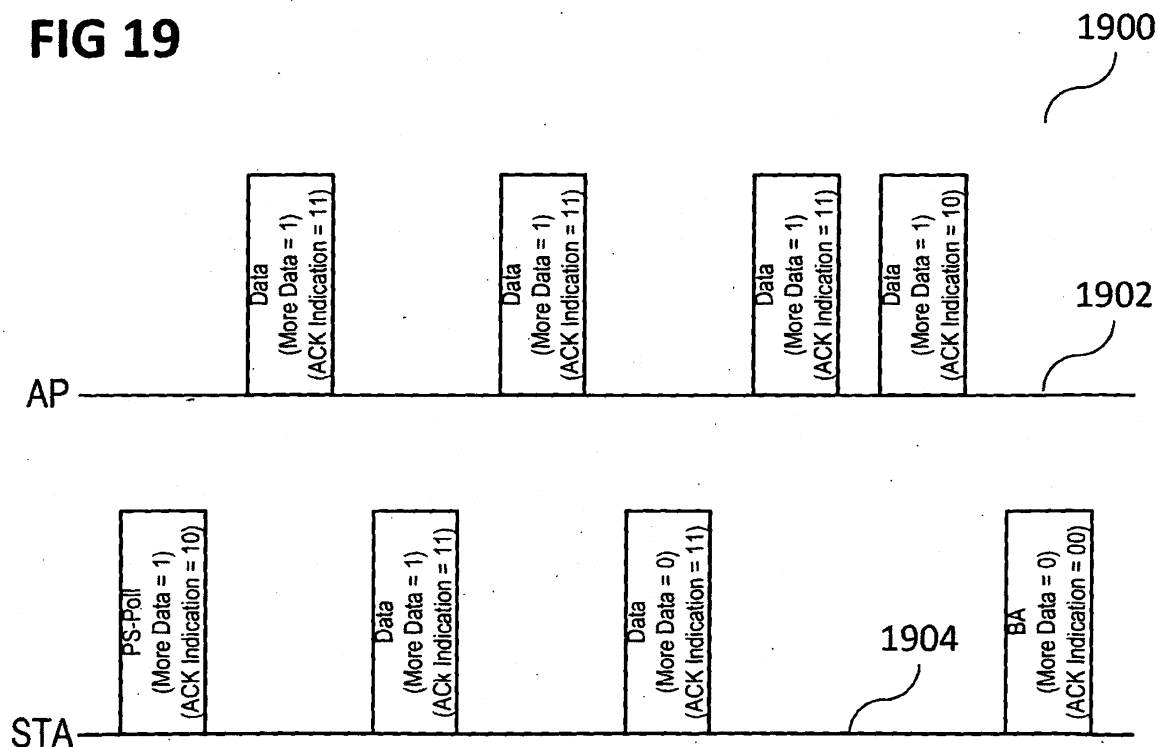

11/11

FIG 20

2000

