
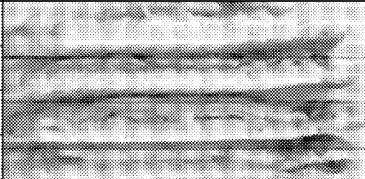


[도1]


SAMPLE CONDITIONS		PROOFING	
		0	X
RETARDING	0	A	B
	X	C	D

SAMPLE	CROSS SECTION		
A		↑ VOLUME	↑ THE NUMBER OF PORES
B			
C			
D			

[도2]

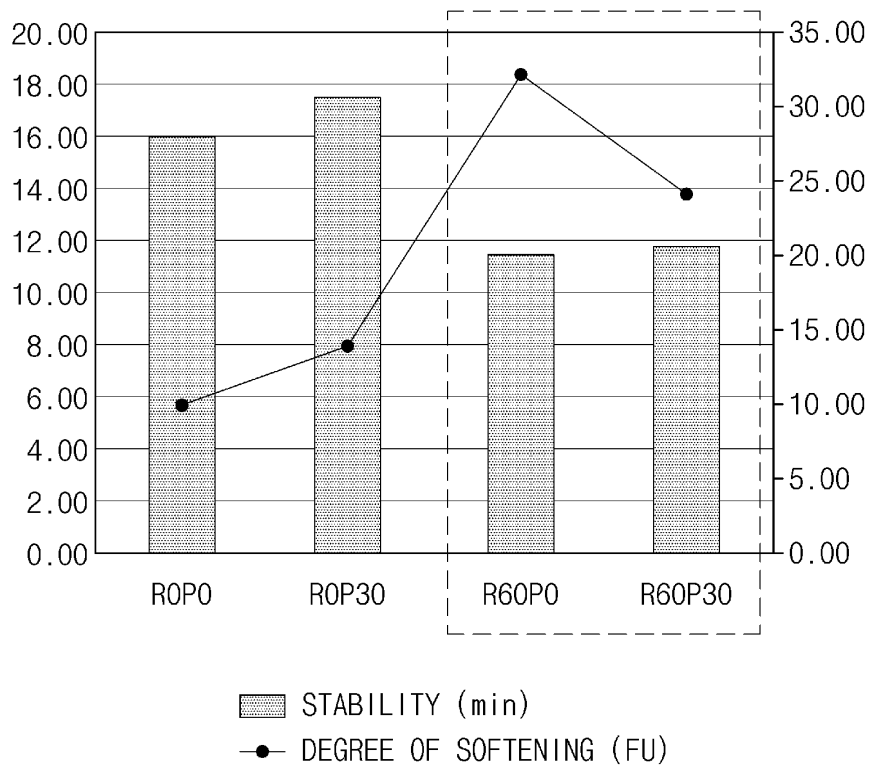


[도3]

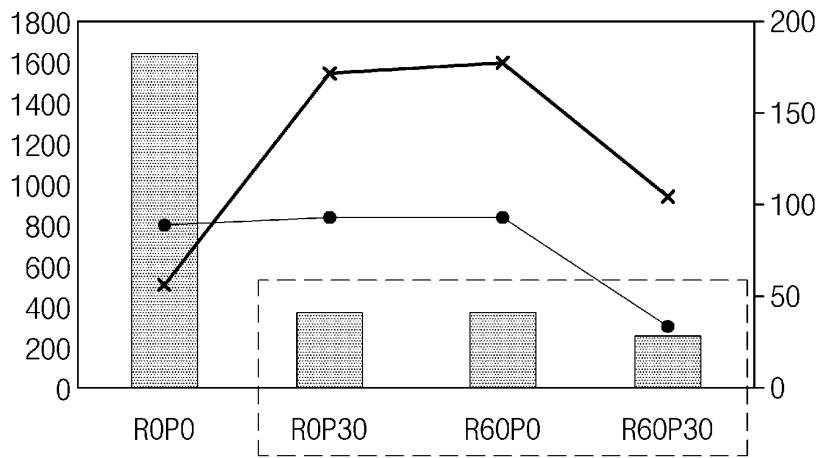


휴지 or 발효 공정 적용시 반죽 강도 약 4배 감소

■ MAXIMUM (BU)
 —×— EXTENSIBILITY (mm)
 —●— ENERGY (area)


[도4]

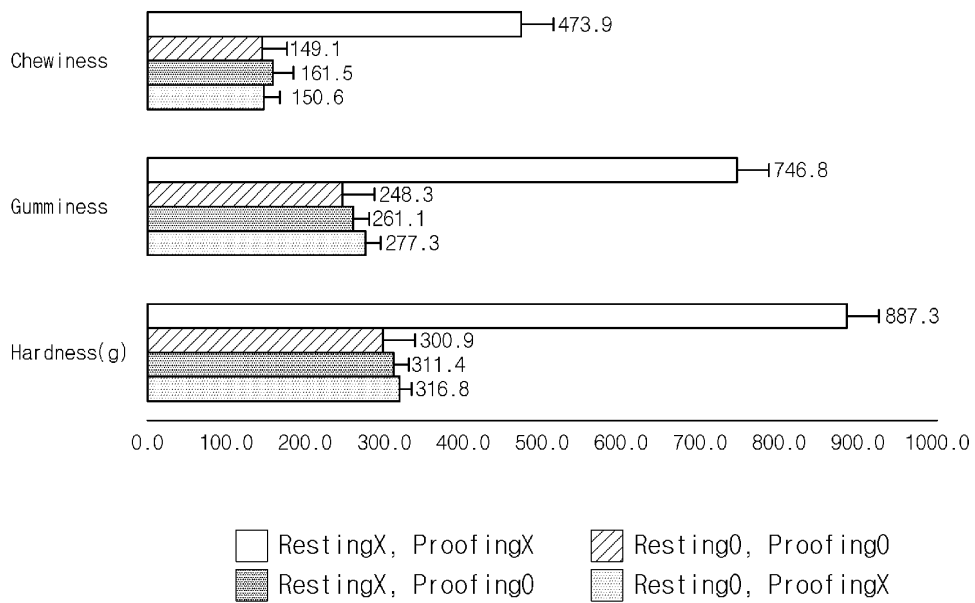


[도5]

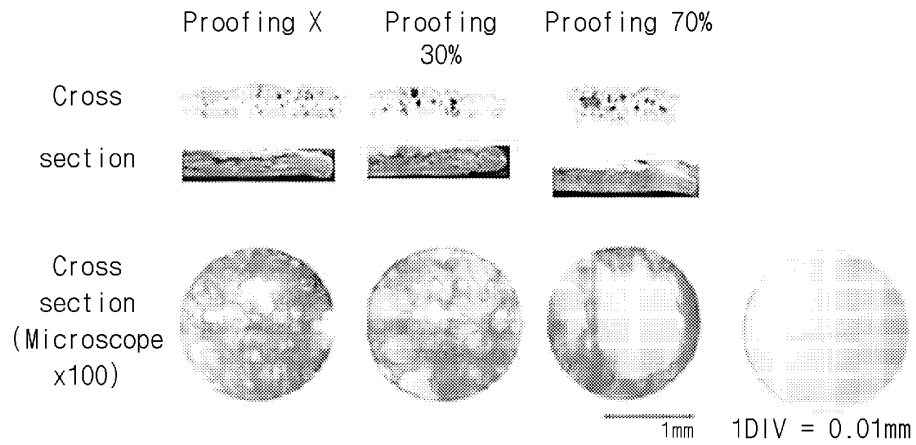

[도6]

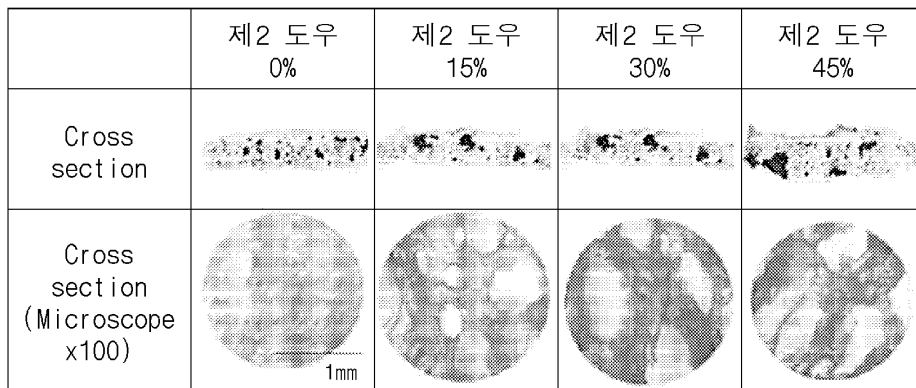

[도7]

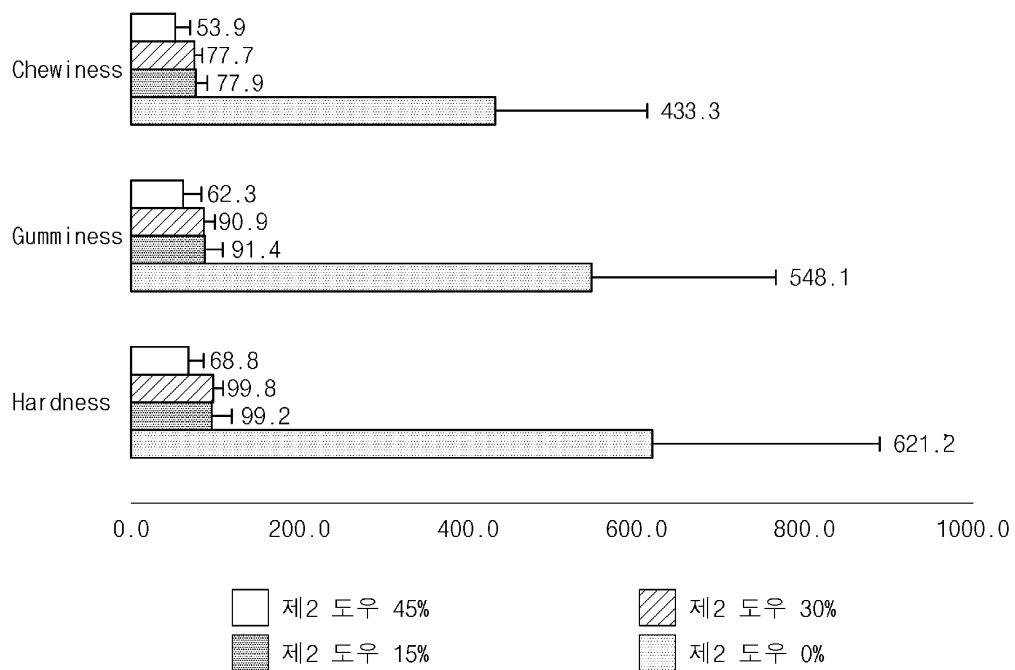

[도8]

