

(43) International Publication Date
16 October 2014 (16.10.2014)

- (51) International Patent Classification:
B63B 21/04 (2006.01) *B63B 21/20* (2006.01)
- (21) International Application Number:
PCT/SE2014/050446
- (22) International Filing Date:
11 April 2014 (11.04.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1350466-7 12 April 2013 (12.04.2013) SE
- (71) Applicant: **BASSOE TECHNOLOGY AB** [SE/SE]; PO Box 2338, S-403 15 Göteborg (SE).
- (72) Inventors: **ÅKERSTRÖM, Per-Anders**; Krokslätt's Storgata 10, S-431 38 Mölndal (SE). **WOCKATZ, Christer**; Charlottenburgsvägen 26, S-169 53 Solna (SE).
- (74) Agent: **ZACCO SWEDEN AB**; P.O Box 5581, S-114 85 Stockholm (SE).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A MOORING SYSTEM

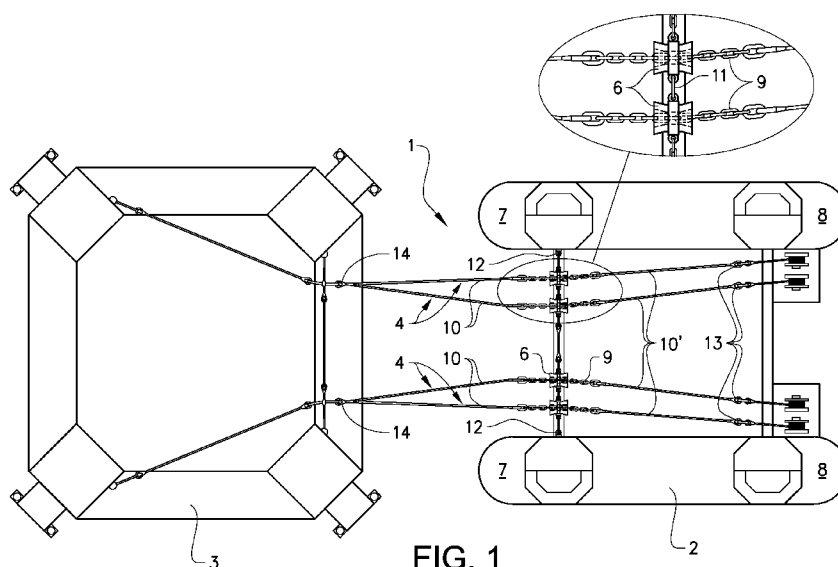


FIG. 1

(57) **Abstract:** A mooring system (1) comprising a first and a second object (2, 3), wherein at least said first object (2) is floating, and wherein said mooring system (1) further comprises a hawser (4) with a first end adapted to be attached to said first object (2), and a second end adapted to be attached to said second object (3), characterised in that the hawser (4) comprises at least two rope segments (10, 10') with an intermediate chafing member (9) arranged between the at least two rope segments (10, 10'), wherein the intermediate chafing member (9) runs via a fairlead (6) and said fairlead (6) is adapted to be arranged adjacent a side (7) of said first object (2) facing the second object (3) and said first end being attached to an attachment point of said first object (2), which attachment point being distanced to said fairlead (6).