



(51) International Patent Classification:  
*B27L 11/02* (2006.01) *B02C 18/18* (2006.01)

(21) International Application Number:  
PCT/SE2011/000042

(22) International Filing Date:  
2 March 2011 (02.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
1000210-3 5 March 2010 (05.03.2010) SE

(72) Inventors; and

(71) Applicants : **HELLSTRÖM, Lisbeth** [SE/SE]; Nackstavägen 19 E, vän 2, S-853 51 Sundsvall (SE). **ENGSTRAND, Per** [SE/SE]; Österflygge 115, S-860 41 Liden (SE). **CARLBERG, Torbjörn** [SE/SE]; Bondevägen 8, S-856 53 Sundsvall (SE). **GRADIN, Per** [SE/SE]; Viskansvägen 5, S-860 13 Stöde (SE). **GREGERSEN, Oyvind** [NO/NO]; Tankveien 15, N-7046 Trondheim (NO).

(74) Common Representative: **HELLSTRÖM, Lisbeth**;  
Nackstavägen 19 E, vän 2, S-853 51 Sundsvall (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR PRODUCING AND PROCESSING WOOD CHIPS

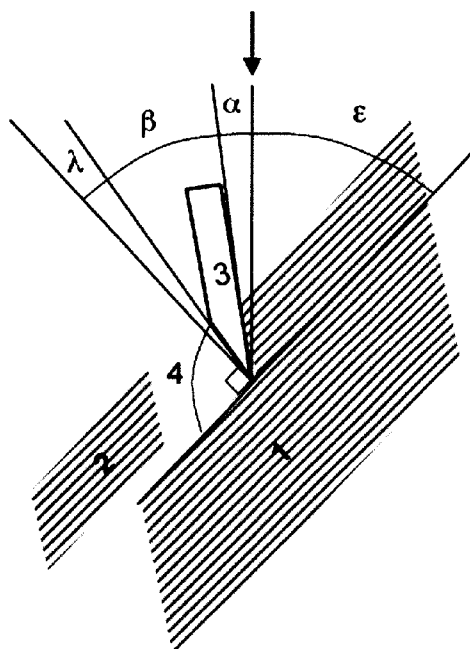


Fig. 1

(57) Abstract: This patent application describes a method to produce wood chips with the intention of reducing the energy consumption in the subsequent process steps for pulp production. With the present method wood chipping is done in a wood chipper where the chipping tool (3) has an angle  $\gamma$  (4) within the interval of  $75^\circ$  to  $105^\circ$  between the fibre direction of the log and the side of the tool which faces the chip (2). Angles in this interval will cause an axially directed compression of the chip which will cause a cracking of the wood during chipping.



---

**Published:**

— *with international search report (Art. 21(3))*