



(51) International Patent Classification:
H04L 27/233 (2006.01) *G01S 19/02* (2010.01)
H03M 7/00 (2006.01)

(21) International Application Number:
PCT/US2011/026500

(22) International Filing Date:
28 February 2011 (28.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/780,365 14 May 2010 (14.05.2010) US

(71) Applicant (for all designated States except US): THE
BOEING COMPANY [US/US]; 100 North Riverside
Plaza, Chicago, Illinois 60606-2016 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): GUTT, Gregory M.
[US/US]; 42758 Conquest Circle, Ashburn, Virginia
20148 (US).


(74) Agents: RAD, Fariba K. et al.; The Boeing Company,
P.O. Box 2515, MC 110-SD54, Seal Beach, California
90740-1515 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: BIT SIGNAL STRUCTURE FOR DIFFERENTIALLY ENCODED BROADCASTS

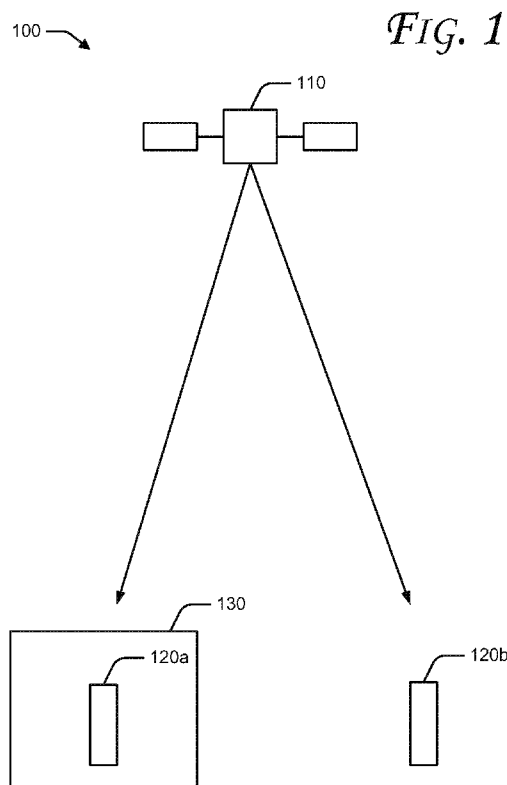

(57) Abstract: In one embodiment, a communication device comprises a differential encoder to receive data for transmission and encode the data for transmission using a set of codes that, when processed by the differential encoder, place the differential encoder in a known state and generate uncorrelated output sequences.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))