

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 May 2003 (22.05.2003)

PCT

(10) International Publication Number
WO 2003/041485 A3

(51) International Patent Classification⁷: **E02F 09/28**

(21) International Application Number:
PCT/US2002/035835

(22) International Filing Date:
8 November 2002 (08.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/986,705 9 November 2001 (09.11.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **ESCO CORPORATION** [US/US]; 2141 N.W. 25th Avenue, Portland, OR 97210 (US).

Published:
— with international search report


(72) Inventors: **OLLINGER, Charles, G., IV.**; 20570 S.W. Anna Court, Aloha, OR 97006 (US). **COWGILL, Noah, D.**; 7920 North Edison Street, Portland, OR 97203 (US).

(88) Date of publication of the international search report:
21 May 2004

(74) Agent: **SCHAD, Steven, P.**; Banner & Witcoff, Ltd., Eleventh floor, 1001 G Street, N.W., Washington, DC 20001-4597 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ASSEMBLY FOR SECURING A WEAR MEMBER

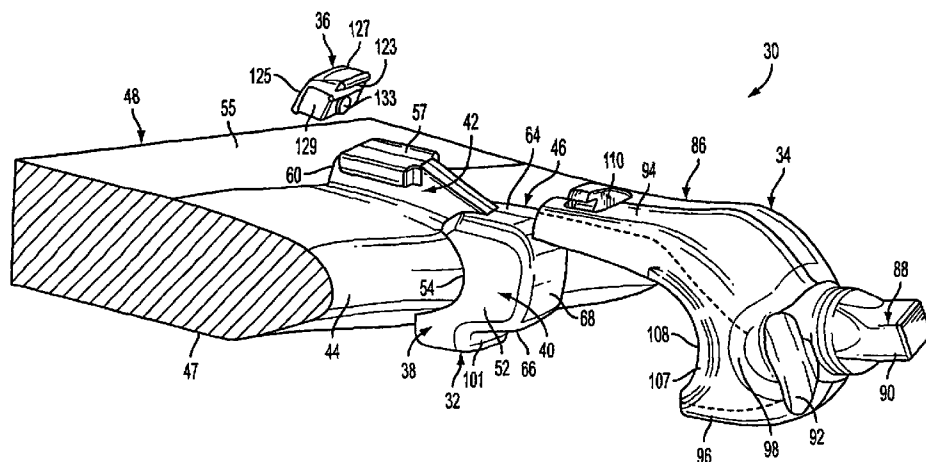

(57) Abstract: An assembly for mounting an excavating tooth (30) particularly suited for a dredge cutterhead includes a base (52), an adapter (34), and a lock (36). The base (32) includes a convex, curved bearing surface that abuts a concave, curved bearing surface on the adapter. The curved bearing surfaces are able to maintain substantially full contact with each other under transverse loading.

WO 2003/041485 A3