

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number
WO 03/062055 A1

(51) International Patent Classification⁷: **B64D 11/00**

(21) International Application Number: PCT/US03/01358

(22) International Filing Date: 17 January 2003 (17.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/349,679 17 January 2002 (17.01.2002) US

(71) Applicant: **SCOTT TECHNOLOGIES, INC.** [US/US];
One Chagrin Highlands, 2000 Auburn Drive, Suite 400,
Beachwood, OH 44122 (US).

(72) Inventors: **TOKASZ, Jeffrey, M.**; 115 Norwood Lane,
Orchard Park, NY 14127 (US). **SABIN, Jeffrey, M.**; 424
Burt Circle, Lewiston, NY 14092 (US).

(74) Agents: **PRINCIPE, David, L.** et al.; Hodgson Russ LLP,
One M & T Plaza, Suite 2000, Buffalo, NY 14203-2391
(US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VALVE MANIFOLD ASSEMBLY FOR OXYGEN MASK DISPENSING CONTAINER

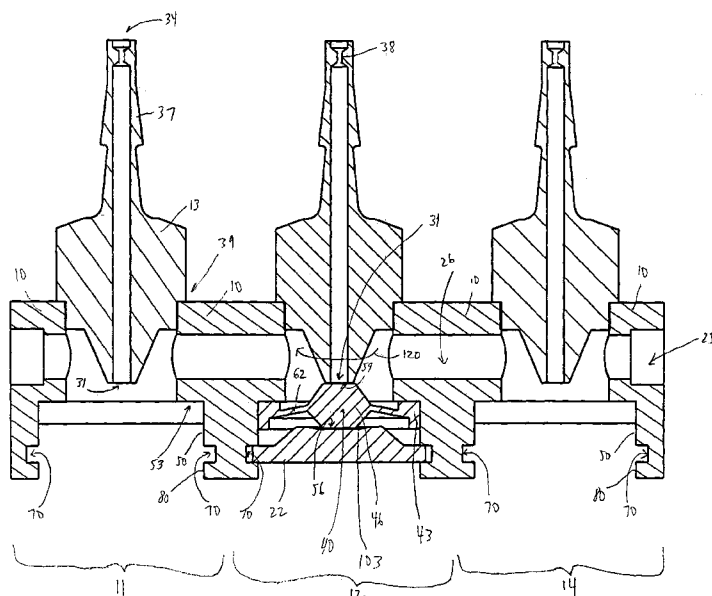

(57) Abstract: A valve manifold assembly with a valve body (10) having at least one inlet (25) and at least one outlet (34). The outlet has an opening (31) disposed inside a chamber formed in the valve body (10). The valve body (10) has at least one groove (70) defined therein. A valve member (40) is attached to the valve body. A retaining member (22) is disposed in at least one groove (70) in the valve body (10) so that the retaining member (22) engages with the valve member (40) to cause it to sealingly engage with the outlet opening (31). The retaining member (22) is capable of being removed from the groove (70) such that it no longer engages with the valve member (40) and it causes the valve member (40) to disengage from the outlet opening (31).



WO 03/062055 A1