

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 August 2011 (11.08.2011)

(10) International Publication Number
WO 2011/096899 A1

(51) International Patent Classification:
B64G 1/40 (2006.01) *H05H 1/50* (2006.01)
F03H 1/00 (2006.01)

(21) International Application Number:
PCT/SG2011/000055

(22) International Filing Date:
8 February 2011 (08.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
201000910-8 8 February 2010 (08.02.2010) SG

(72) Inventor; and

(71) Applicant : **MANZONI, Giulio** [IT/SG]; 29 West Coast Crescent, Blue Horizon, Tower E, #13-30, Singapour 128049 (SG).

(74) Agents: **MCLAUGHLIN, Michael, Gerard** et al.; McLaughlin IP Pte. Ltd., 24A Mosque Street, Singapore 059504 (SG).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: A MICRO-NOZZLE THRUSTER

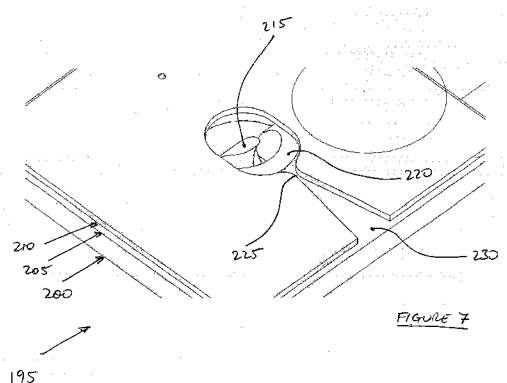

(57) Abstract: A micro-nozzle thruster comprising a micro-nozzle having an inlet at a first end perpendicularly aligned gas supply channel at a first end, and a thruster outlet at a second opposed end; said inlet in fluid communication with a gas supply channel, said gas supply channel perpendicularly aligned with a longitudinal axis of the micro-nozzle; a cathode within the gas supply channel and an anode external to the gas supply channel and proximate to the inlet, so as to create a plasma flow from said gas.