




(43) International Publication Date
3 October 2013 (03.10.2013)

- | | |
|---|---|
| (51) International Patent Classification:
<i>F02K 3/00</i> (2006.01) <i>F02C 7/36</i> (2006.01)
<i>F02C 7/00</i> (2006.01) <i>F02K 99/00</i> (2009.01) | (74) Agent: GOTTSCHALK, William S.; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US). |
| (21) International Application Number:
PCT/US2013/033643 | (81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW. |
| (22) International Filing Date:
25 March 2013 (25.03.2013) | (84) Designated States (<i>unless otherwise indicated, for every kind of regional protection available</i>): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM |
| (25) Filing Language:
English | |
| (26) Publication Language:
English | |
| (30) Priority Data:
13/432,699 28 March 2012 (28.03.2012) US | |
| (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US). | |
| (72) Inventors: COFFIN, James B.; 35 Hobson Avenue, Windsor, Connecticut 06095 (US). OTTO, John R.; 67 Carriage Crossing Lane, Middletown, Connecticut 06457 (US). | |

[Continued on next page]

(54) Title: GAS TURBINE ENGINE FAN DRIVE GEAR SYSTEM DAMPER

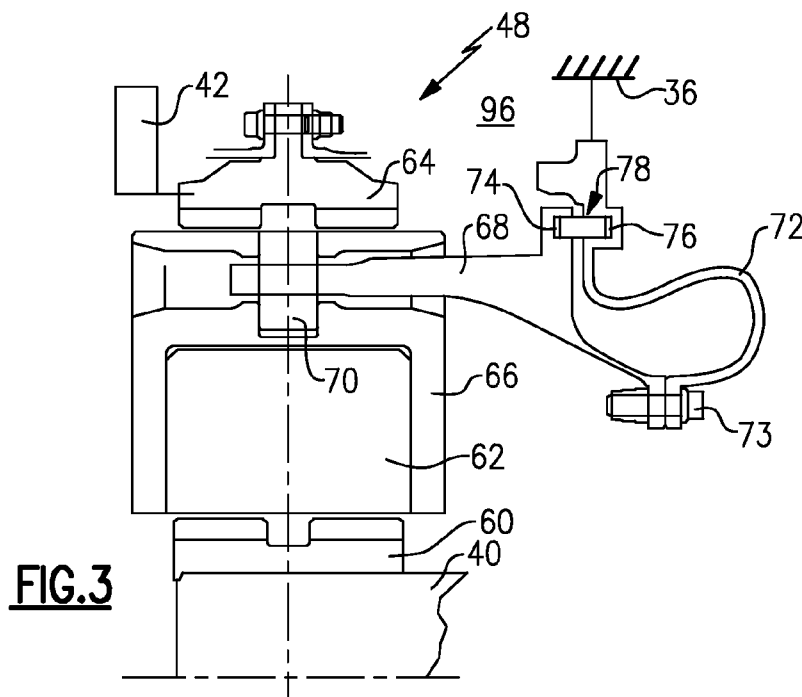

(57) Abstract: A gas turbine engine includes a fan section. A turbine section is coupled to the fan section via a geared architecture. The geared architecture includes a torque frame and a flex support spaced apart from one another at a location. A gear train is supported by the torque frame. A damper is provided between the torque frame and the flex support at the location.

WO 2013/148542 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*