


ABSTRACT

AN ELECTROCONDUCTIVE RESIN COMPOSITION

An electroconductive resin composition, having surface resistance values both at 10 V and 500 V being within a range of 10^5 - $10^{12} \Omega$ and a ratio of a surface resistance value at 10 V to a surface resistance value at 500 V being 10^6 or less; and comprising a polyphenylene ether and/or an alkenyl aromatic resin; a copolymer having an amine value of 170 or less of an alkenyl aromatic compound of formula(1):

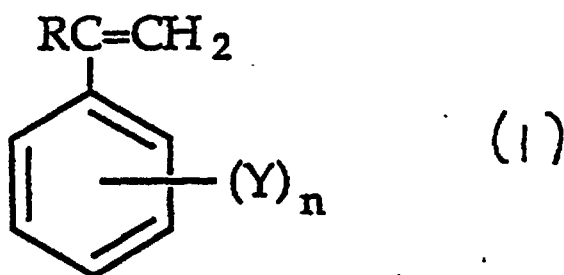

wherein R is hydrogen, an alkyl group etc. Y is hydrogen, halogen, an alkyl group etc. and n is an integer of 0 to 5, and a N,N-dialkylaminoalkyl (metha)acrylate compound; and a carbon black having a dibutylterephtharate oil absorption amount of 70 ml/100 or more.