



(51) International Patent Classification:

A43B 13/12 (2006.01) A43B 17/03 (2006.01)
A43B 17/00 (2006.01) A43B 17/08 (2006.01)
A43B 17/02 (2006.01) A43B 17/14 (2006.01)

(21) International Application Number:

PCT/IB2010/000208

(22) International Filing Date:

3 February 2010 (03.02.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

P0020090052 25 September 2009 (25.09.2009) ID

(71) Applicant (for all designated States except US): **BO-COROCCO ITALIA S.R.L.** [IT/IT]; Via Cavallotti, 15, I-20121 Milano (IT).

(72) Inventor; and

(71) Applicant : **RIDWAN, Saidbun** [ID/ID]; Jl. Pinisi Permai I No.1 RW/RT.006/007, Kel. Kapuk Muara, Kec. Penjaringan, Jakarta Utara (ID).

(74) Agent: **LUNATI & MAZZONI S.R.L.**; LUNATI, Valerio, Via Carlo Pisacane, 36, I-20129 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: MULTILAYER INSOLE TO BE FITTED IN FOOTWEAR AND THE LIKE

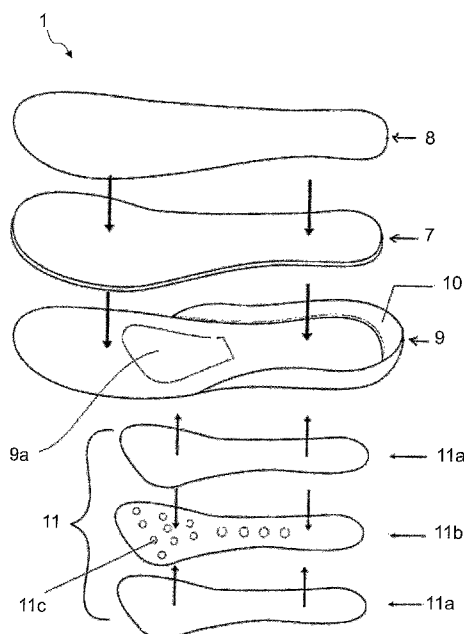


Fig. 1

(57) Abstract: A multilayer insole (1) to be fitted in a shoe (2), extending along a major extension surface (1a) and comprising at least one damper element (J) suitable to dampen the impact of a shoe (2) on the ground, made of an open-cell foam of damping microcellular polyurethane material, which damper element (7) substantially extends over the whole insole (1) in the direction of the major extension surface (1a) and is placed in the upper part of the insole (1).



-
- *as to the identity of the inventor (Rule 4.17(i))*
 - *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*