

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
12 January 2023 (12.01.2023)



(10) International Publication Number
WO 2023/282943 A1

(51) International Patent Classification:
B29C 45/73 (2006.01) *B29C 45/28* (2006.01)
B29C 45/27 (2006.01)

(21) International Application Number:
PCT/US2022/022834

(22) International Filing Date:
31 March 2022 (31.03.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
EP21184211.7 07 July 2021 (07.07.2021) EP
17/650,107 07 February 2022 (07.02.2022) US

(71) Applicant: INCOE CORPORATION [US/US]; 2850
High Meadow Circle, Auburn Hills, MI 48326 (US).

(72) Inventors: STRIEGEL, Christian; Kiesweg 2, Hainburg,
63512 Hessen (DE). GREB, Scott; 58254 Pleasant View

Ct., Washington Township, MI 48094 (US). JOERG, An-
ton; Bachstrasse 77, Grossostheim, Bayern 63762 (DE).

(74) Agent: EVANINA, Gunther, J.; Butzel Long Docketing
Department, 2410 Woodlake Drive, Suite 420, Okemos, MI
48864 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH,
KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,

(54) Title: HEATING DEVICE

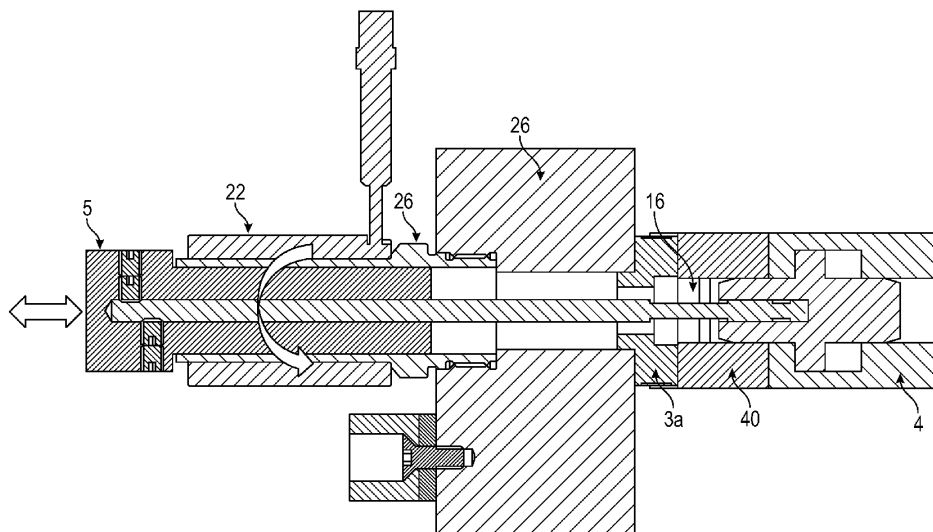


FIG. 8

(57) Abstract: Heating device for locally heating of an injection mold cavity wall, comprising: a base plate, an actuator located on the base plate, to perform a linear movement; a heated stamp connected to the actuator and driven by the actuator, to perform a linear movement in direction to and from the injection mold cavity wall; wherein the heated stamp is located below the base plate and the actuator is located on top of the base plate, and wherein the base plate comprises an opening through which a pin extends for transferring the linear movement from the actuator to the heated stamp.

[Continued on next page]

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*