28 MAY 2003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
30 August 2001 (30.08.2001)

PCT

(10) International Publication Number
WO 01/63824 A1

(51) International Patent Classification[7]: H04L 1/00

(21) International Application Number: PCT/KR00/01351

(22) International Filing Date:
23 November 2000 (23.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000-9624 26 February 2000 (26.02.2000) KR

(71) Applicant: SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416 Maetan-dong, Paldal-gu, Suwon-city, Kyungki-do 442-373 (KR).

(72) Inventors: PARK, Jeong-Hoon; 106-1406 Kwanak Hyundai Apt., Sangdo 5-dong, Dongjak-gu, Seoul 156-035 (KR). LEE, Yung-Lyul; 1-704 Keukdong Apt. 192, Garak-dong, Songpa-gu, Seoul 138-160 (KR). PARK, Dong-Seek; c/o Samsung Electronics Co., Ltd., 416 Maetan-dong, Paldal-gu, Suwon-city, Kyungki-do 442-370 (KR). BAE, Dae-Gyu; 207-1204 Jugong Apt., 548, Woncheon-dong, Paldal-gu, Suwon-city, Kyungki-do 442-380 (KR). KIM, In-Hwan; 3-309 Samsung 3-cha Apt., Maetan 4-dong, Paldal-gu, Suwon-city, Kyungki-do 442-374 (KR).

(74) Agent: LEE, Young-Pil; The Cheonghwa Bldg., 1571-18, Seocho-dong, Seocho-gu, Seoul 137-874 (KR).


(81) Designated States *(national)*: AU, BR, CA, CN, JP, NO, RU, SG.

(84) Designated States *(regional)*: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR TRANSMITTING/RECEIVING BITSTREAM IN NETWORK AND METHOD THEREOF

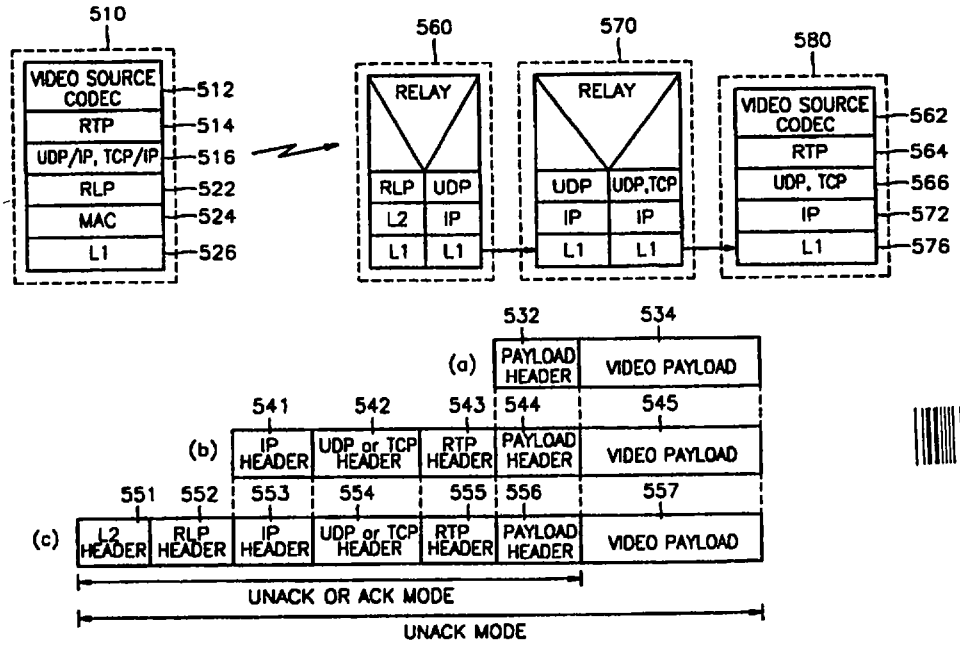



(57) Abstract: An apparatus and method of transceiving a bitstream, by which avideo bitstream is stably transmitted by the effective use of two logic channels when communication is established by the two logic channels during transmission of the video bitstream in a communication network, is provided. In this method, a source is encoded into a bitstream using a predetermined type of coding. Then, the encoded bitstream is transmitted to each communication protocol layer, while the header of each communication protocol layer is added to a payload. The header is transmitted separately from the bitstream.

WO 01/63824 A1