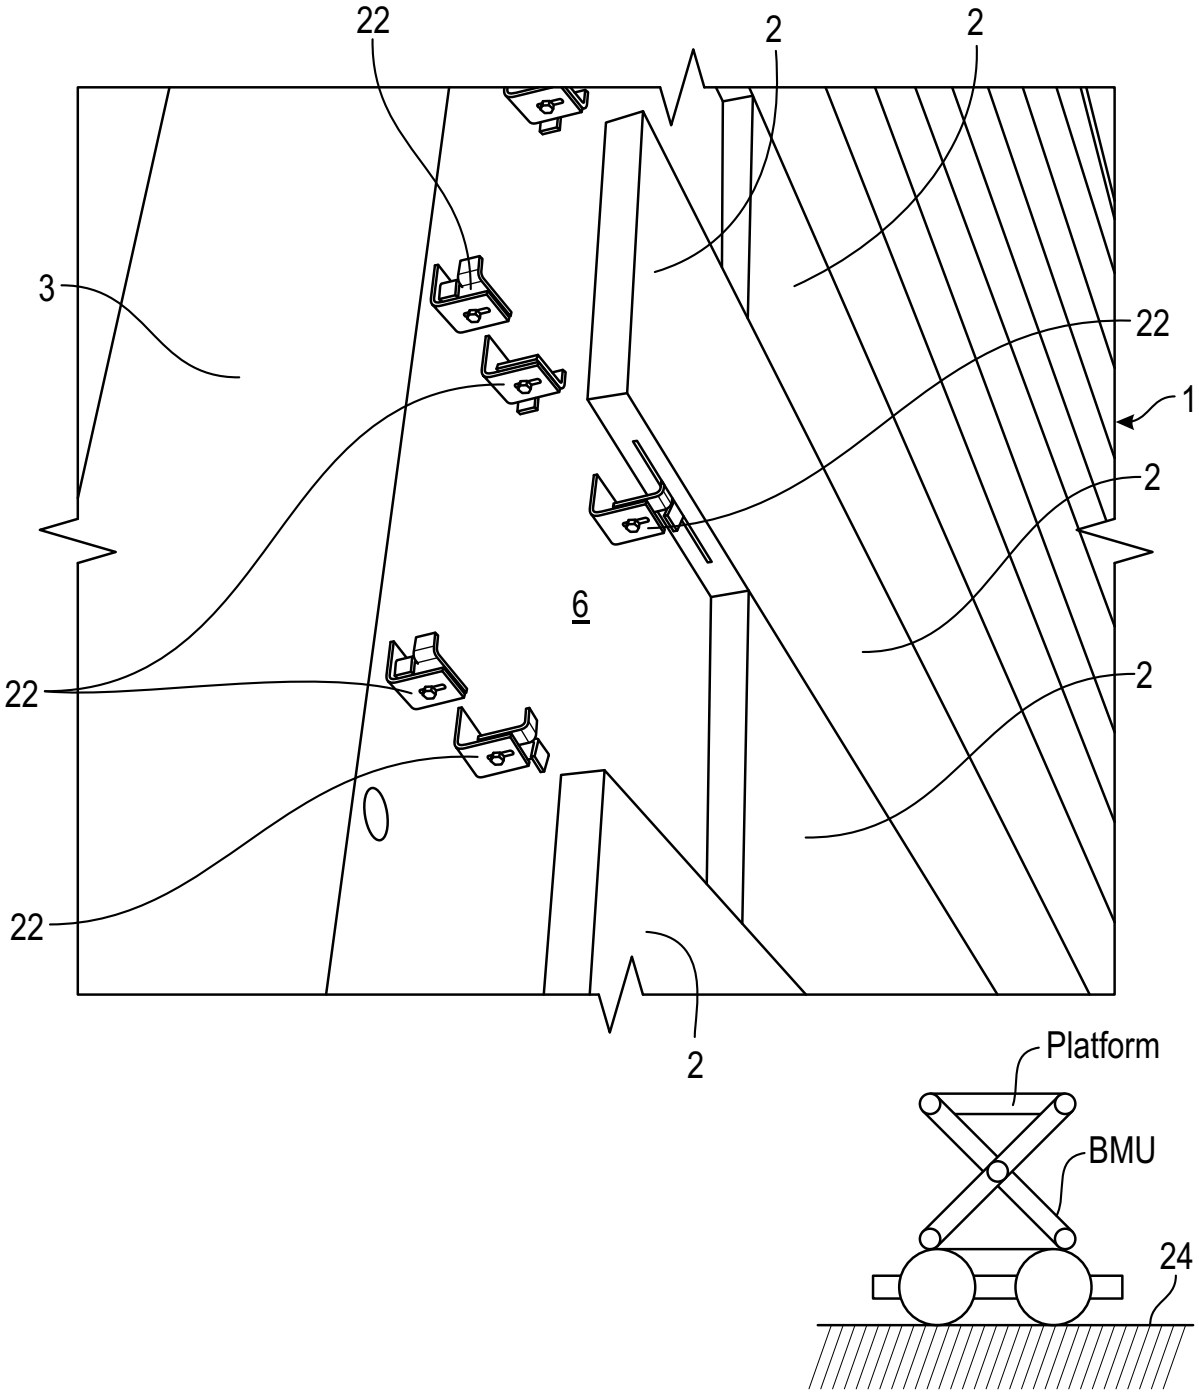


FIG. 1

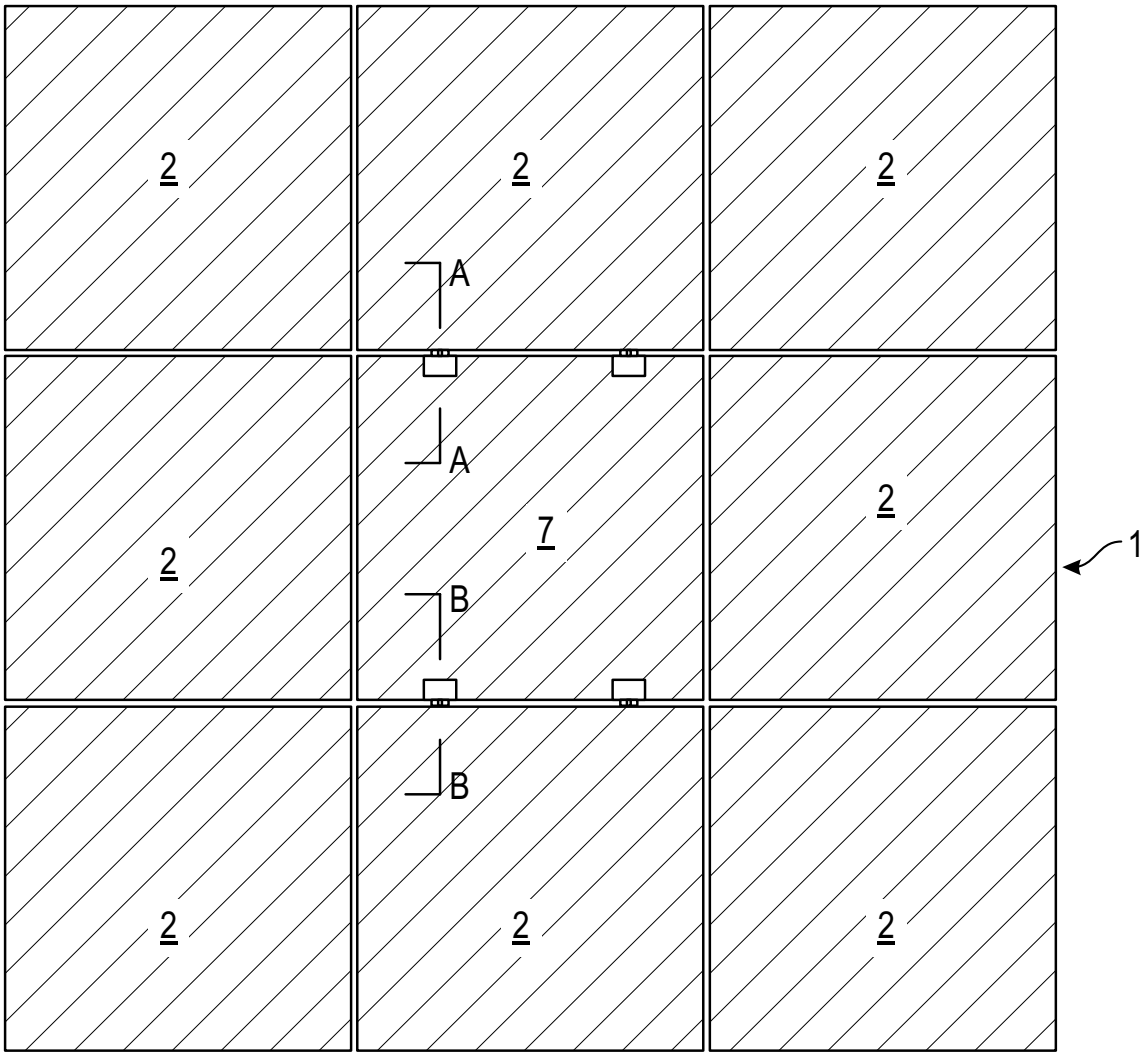


FIG. 2

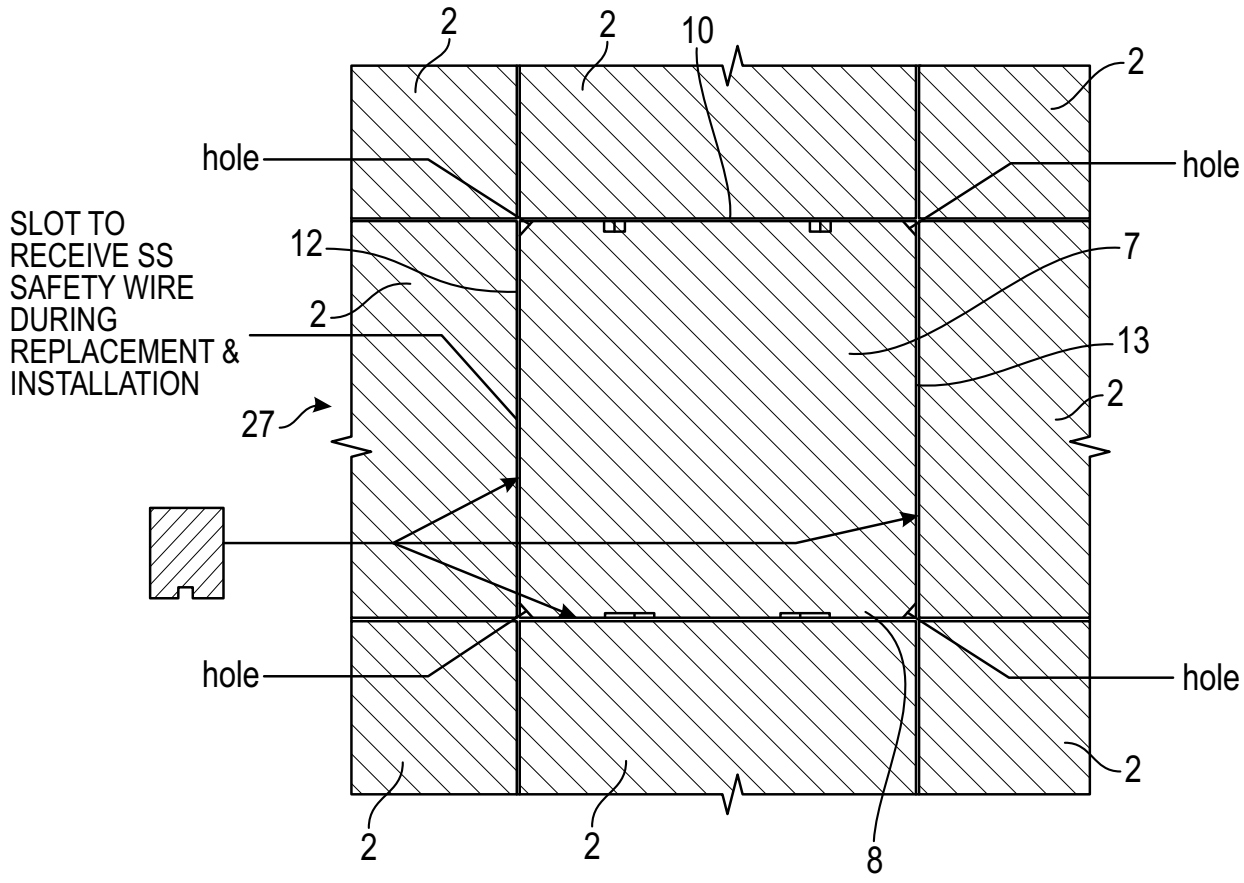
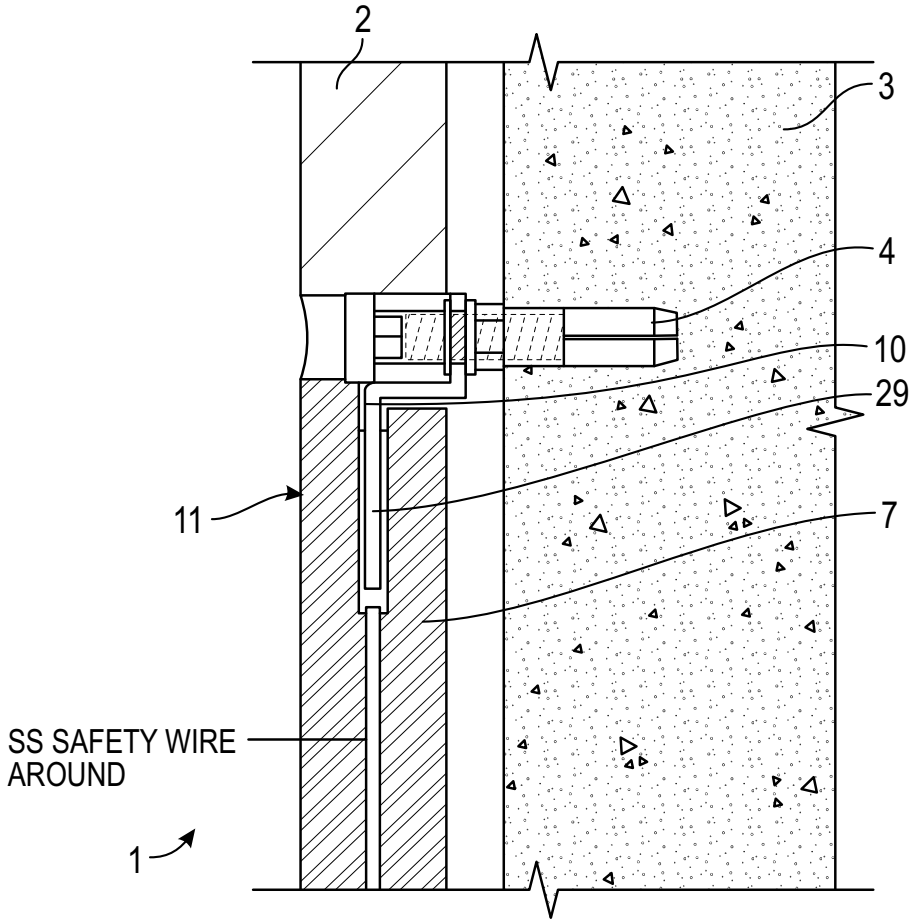

2
2
10
2
hole
hole
SLOT TO RECEIVE SS SAFETY WIRE DURING REPLACEMENT & INSTALLATION
12
2
7
13
2
27
hole
hole
2
2
2
8

FIG. 3



SECTION A-A

FIG. 4

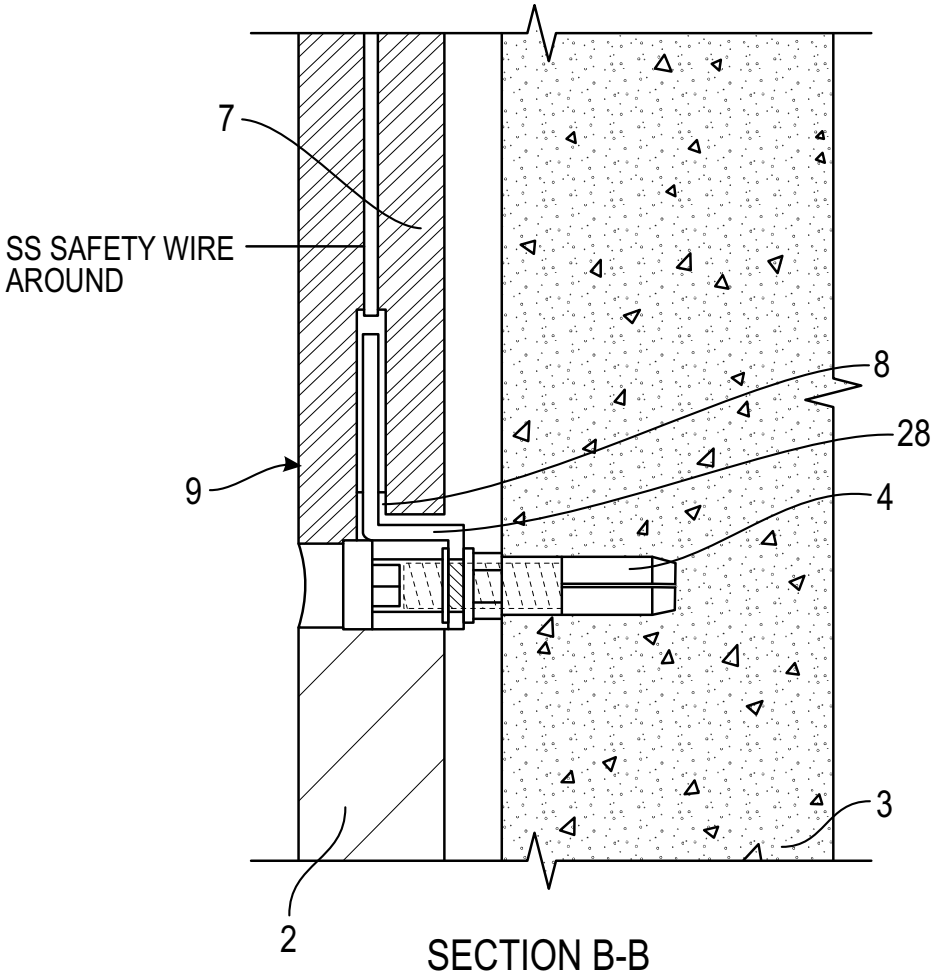


FIG. 5

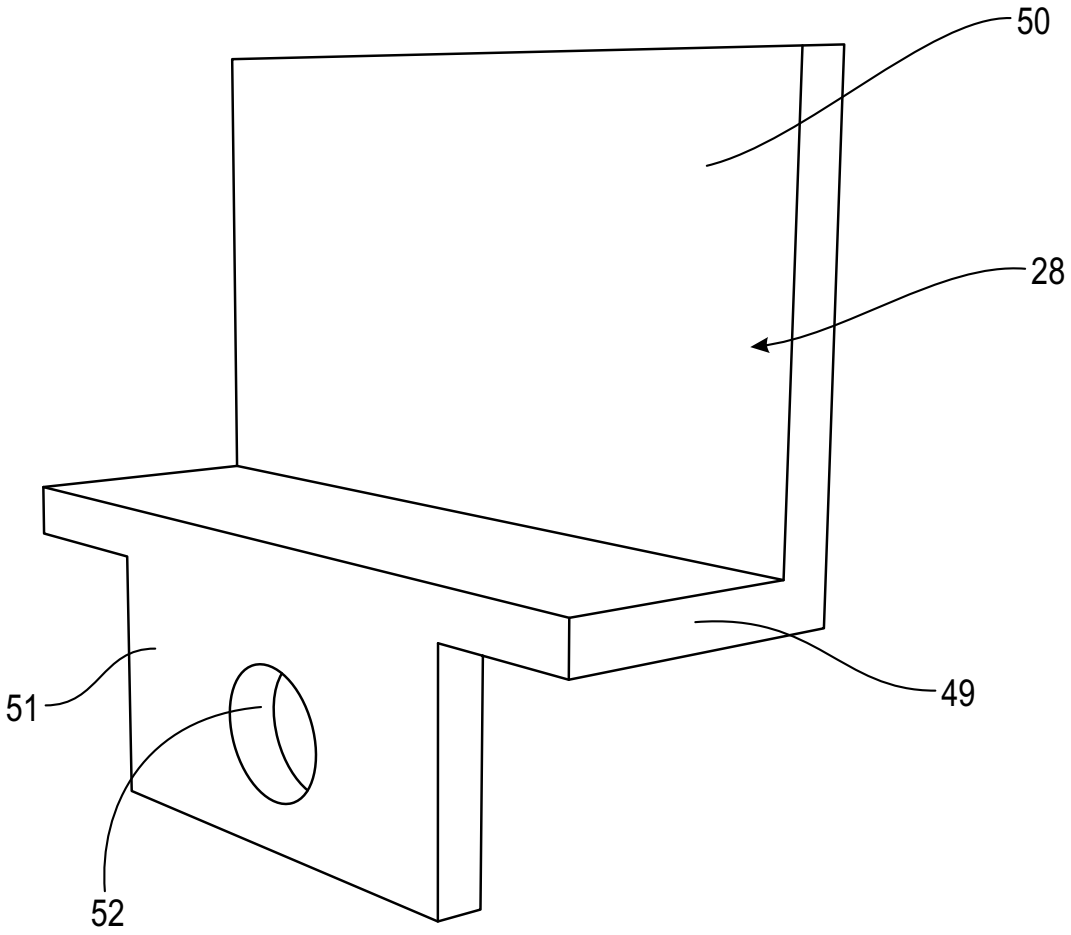


FIG. 6

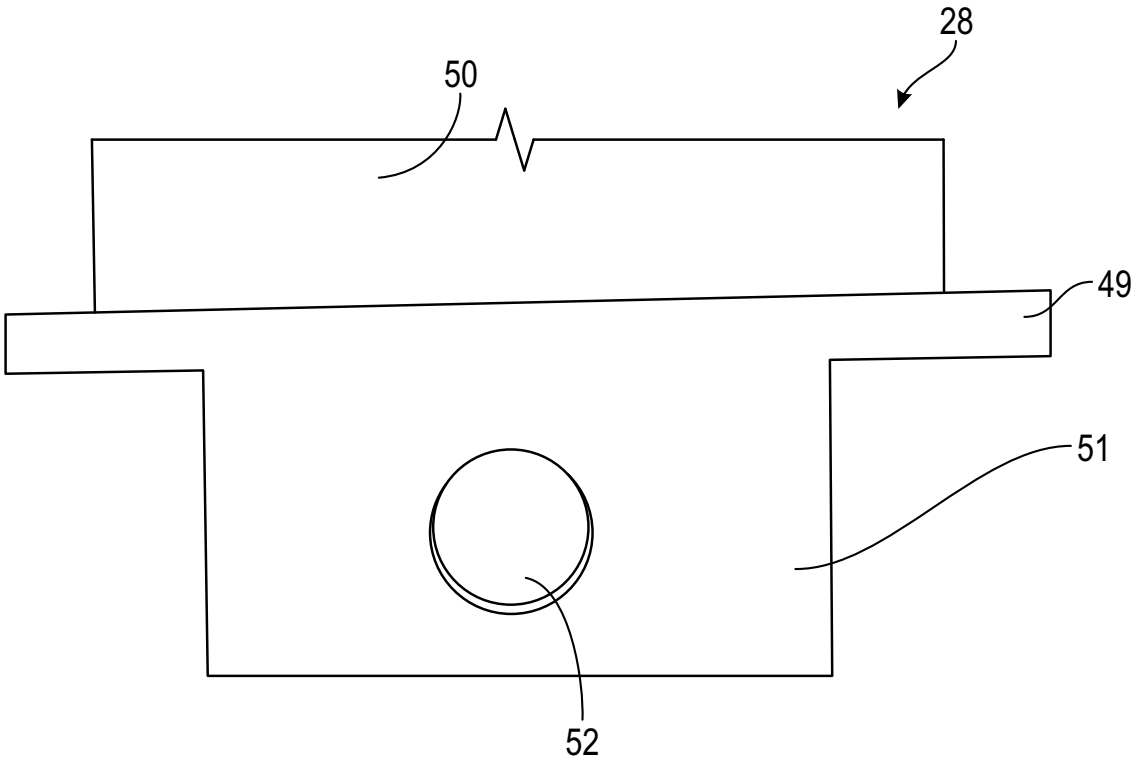


FIG. 7

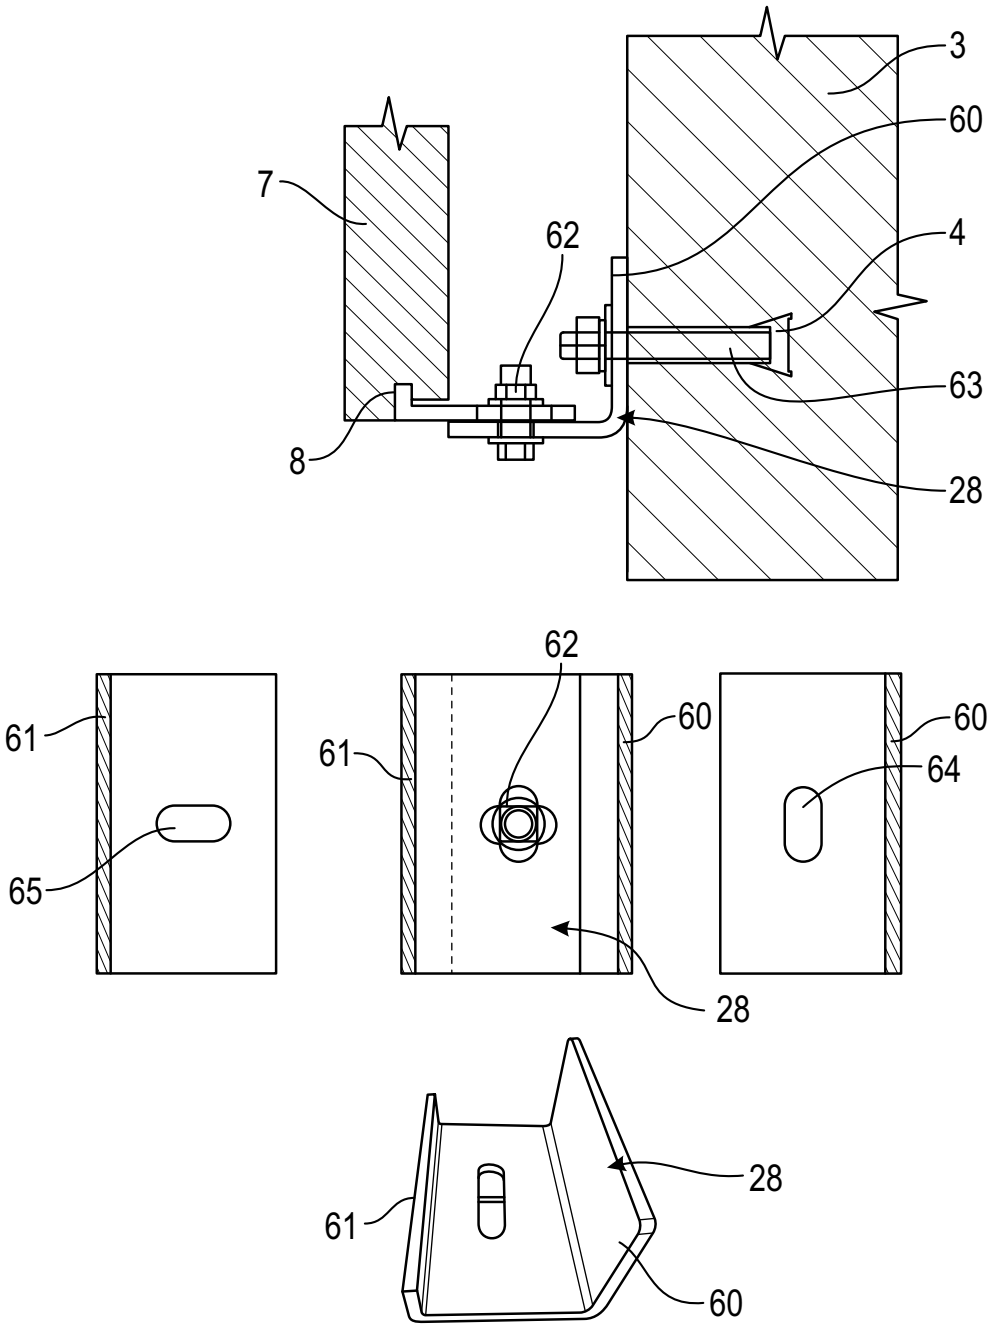


FIG. 8

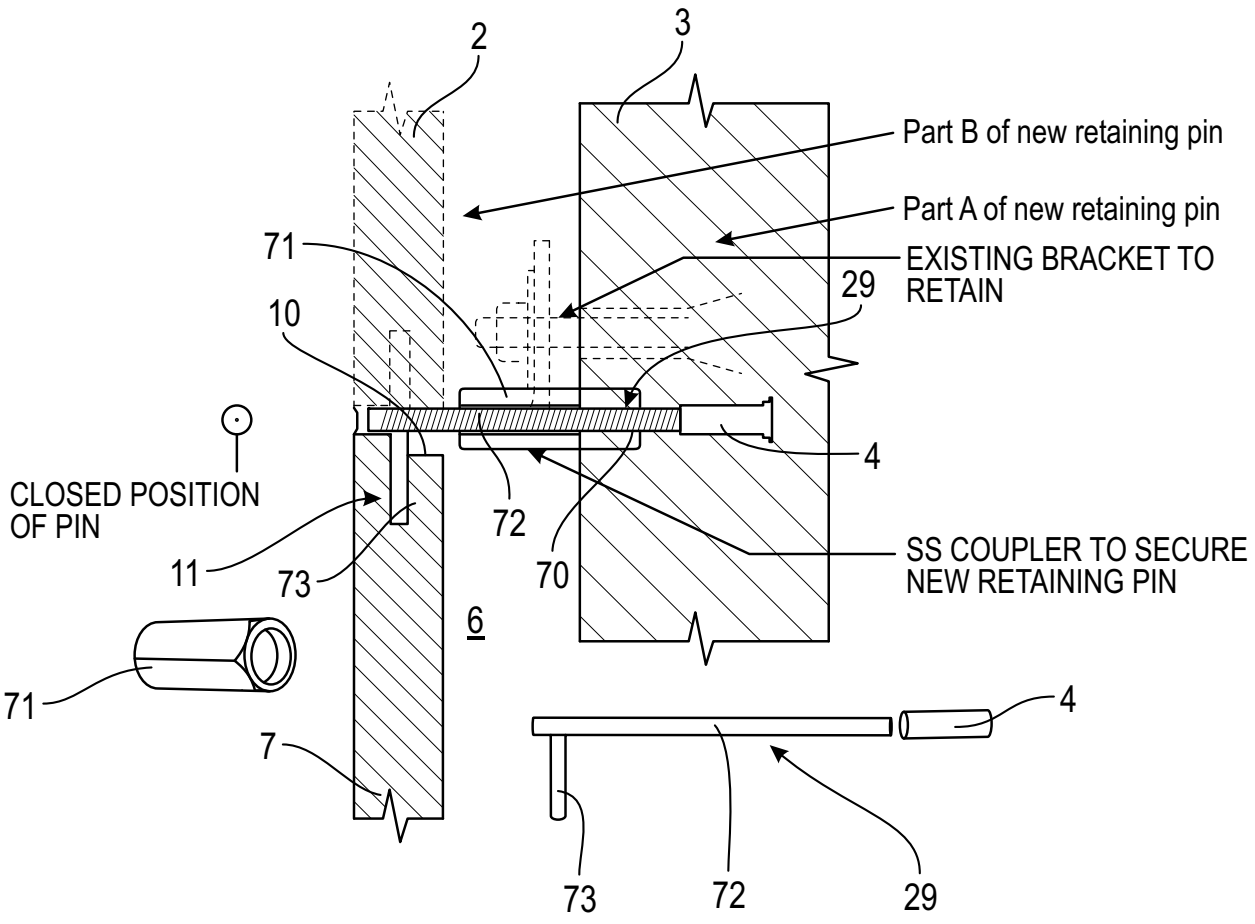

2
3
Part B of new retaining pin
Part A of new retaining pin
71
EXISTING BRACKET TO RETAIN
29
10
4
CLOSED POSITION OF PIN
72
11
73
70
SS COUPLER TO SECURE NEW RETAINING PIN
6
71
4
7
73
72
29

FIG. 9