



- (51) **International Patent Classification:**
E21B 17/02 (2006.01) *E21B 43/08* (2006.01)
- (21) **International Application Number:**
PCT/US2013/026005
- (22) **International Filing Date:**
14 February 2013 (14.02.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/408,856 29 February 2012 (29.02.2012) US
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).
- (72) **Inventors; and**
- (71) **Applicants :** GRECI, Stephen, Michael [US/US]; 3113 Luminara Dr., Little Elm, TX 75068 (US). LOPEZ, Jean, Marc [FR/US]; 7308 Stoddard Lane, Plano, TX 75025 (US).
- (74) **Agents:** CONLEY ROSE, P.C. et al.; 5601 Granite Parkway, Suite 750, Plano, TX 75024 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

(54) **Title:** ROTATING AND TRANSLATING SHUNT TUBE ASSEMBLY

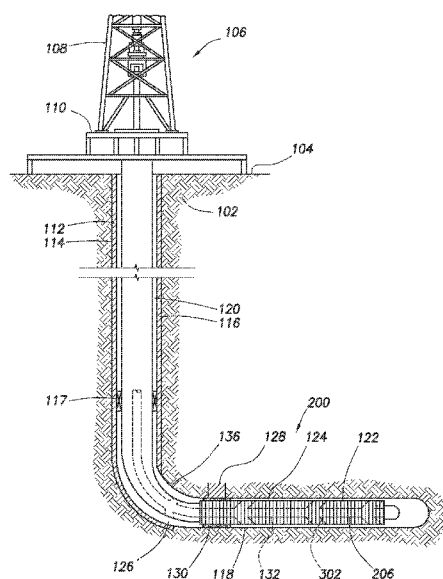


FIG. 1

(57) **Abstract:** A tubular assembly comprises a wellbore tubular, at least one shunt tube, and a coupling assembly configured to rotatably couple the at least one shunt tube to the wellbore tubular. A method of coupling the tubular assemblies comprises coupling a first wellbore tubular to a second wellbore tubular, wherein a first shunt tube is coupled to the first wellbore tubular, rotating a second shunt tube about the second wellbore tubular that is coupled to the first wellbore tubular until the second shunt tube is substantially aligned with the first shunt tube, and coupling the first shunt tube to the second shunt tube.