

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 April 2008 (24.04.2008)

PCT

(10) International Publication Number
WO 2008/046138 A1

(51) International Patent Classification:

F16K 31/124 (2006.01) *F16K 31/365* (2006.01)
F16K 31/128 (2006.01) *F16K 31/385* (2006.01)
F16K 31/383 (2006.01) *E03D 1/32* (2006.01)
E03D 1/30 (2006.01) *F16K 31/38* (2006.01)

(21) International Application Number:

PCT/AU2007/001569

(22) International Filing Date: 16 October 2007 (16.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2006905723 16 October 2006 (16.10.2006) AU

(71) Applicant (for all designated States except US): **MI-CROFLOW INTERNATIONAL PTY LIMITED**
[—/AU]; 'MTA House', Level 1, 43-51 Brisbane Street,
Darlinghurst, New South Wales 2010 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAIJAR, Elias**

[AU/AU]; 1/31C Charles Street, Glebe, New South Wales
2037 (AU).


(74) Agents: **COWLE, Anthony John** et al.; Davies Collison
Cave, Level 14, 255 Elizabeth Street, Sydney, New South
Wales 2000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: FLUID LEVEL CONTROL VALVE

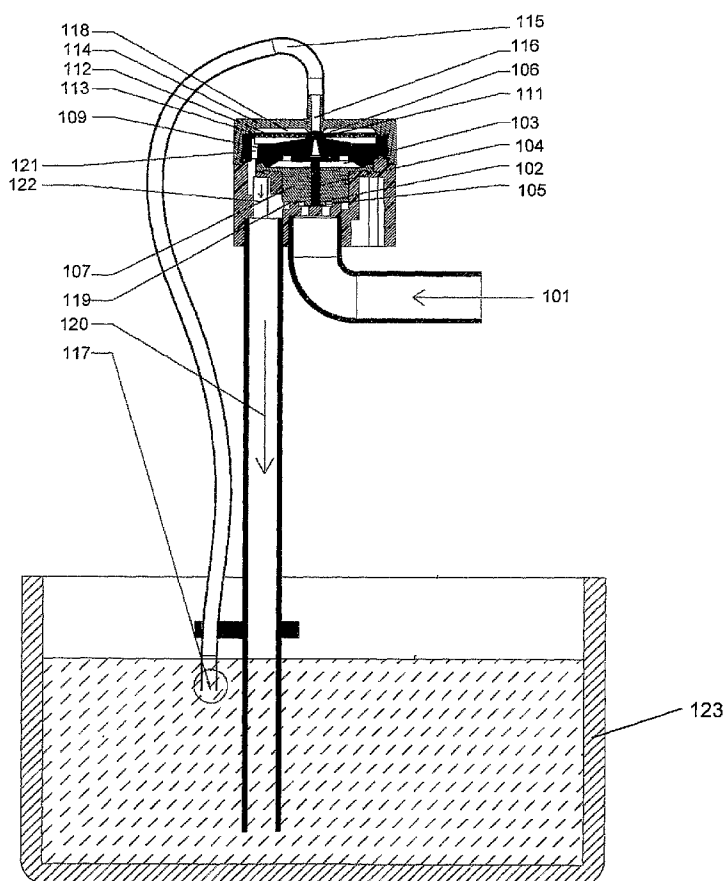

(57) Abstract: A valve device to control fluid supplied to a tank (123). The valve device includes a fluid inlet (101), a fluid outlet (120) to expel fluid to said tank (123), a valve seat (119), defining an opening through which fluid is adapted to flow from said inlet (101) to said outlet (120), a valve member (107), movable relative to said valve seat (119) between an open and a closed position, and, a control means to operate said valve device. The control means includes a control chamber (103), a fluid passageway (102) between said control chamber (103) and said inlet (101), a flow control element (104) within said fluid passageway (102), a relief valve (106), movable between an open and closed position to selectively expel fluid from said control chamber (103) to a relief port (121), and, a relief valve activation means, to control the operation of said relief valve according to the amount of fluid in said tank (123). The valve device (200) may be constructed in a multi-part form, including a main body portion (201) and a relief portion (202).



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*